


# COMPU-SHACK PRODUCTION, GMBH CS-BASELINE-PCI UTP/FO, CS-MORITZ-PCI UTP/FO

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Star
Wiring Type	Unshielded twisted pair Fiber optic cable
Data Bus	32-bit PCI

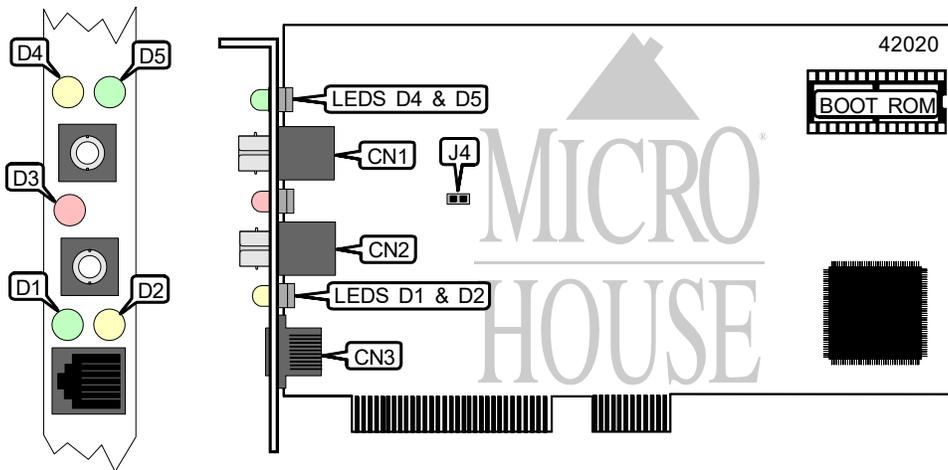

CONNECTIONS			
Function	Label	Function	Label
Fiber-optic connector	CN1	UTP connector	CN3
Fiber-optic connector	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
50 Ohm termination activated	J4	Closed	
50 Ohm termination not activated	J4	Open	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	UTP link is good
LED1	Green	Off	UTP link is broken
LED2	Yellow	On	Data is being transmitted/received
LED2	Yellow	Off	Data is not being transmitted/received
LED3	Red	On	Jabber signal detected
LED3	Red	Off	No jabber signal detected
LED4	Yellow	Blinking	Collision detected on network
LED4	Yellow	Off	No collision detected on network
LED5	Green	On	Fiber-optic link is good
LED5	Green	Off	Fiber-optic link is broken