


EICON TECHNOLOGY CORPORATION PACKETBLASTER

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	64KB SRAM
Boot ROM	Unidentified
Network Transfer Rate	2Mbps
Topology	Star
Wiring Type	VHSI
Data Modulation Protocol	ITU-T V.24, V.35, V.36, RS-449, X.21bis, EIA-530
Data Bus	16-bit ISA

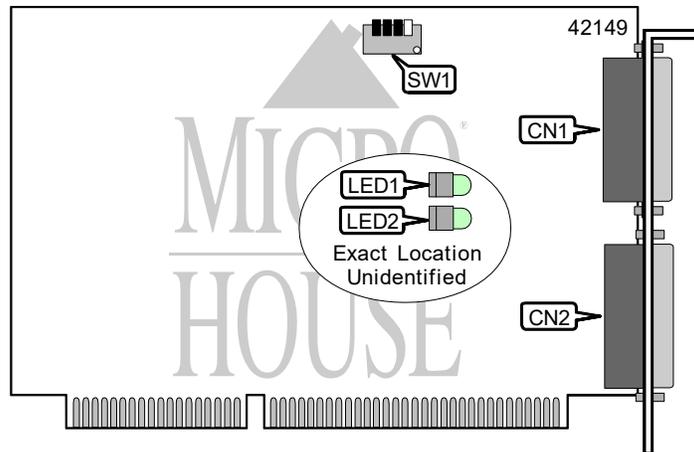

CONNECTIONS				
Function	Label	Function	Label	
36-pin port (female)	CN1	36-pin port (female)	CN2	

BASE I/O ADDRESS SELECTION					
Setting	SW1/1	SW1/2	SW1/3	SW1/4	
300h	Closed	Closed	Closed	Closed	
310h	Closed	Closed	Closed	Open	
320h	Closed	Closed	Open	Closed	
330h	Closed	Closed	Open	Open	
340h	Closed	Open	Closed	Closed	
350h	Closed	Open	Closed	Open	
360h	Closed	Open	Open	Closed	
370h	Closed	Open	Open	Open	
380h	Open	Closed	Closed	Closed	
390h	Open	Closed	Closed	Open	
3A0h	Open	Closed	Open	Closed	
3B0h	Open	Closed	Open	Open	
3C0h	Open	Open	Closed	Closed	
3D0h	Open	Open	Closed	Open	
3E0h	Open	Open	Open	Closed	
3F0h	Open	Open	Open	Open	

INTERRUPT SELECTION
Note: IRQ selection is software configurable.

Continued on next page . . .

EICON TECHNOLOGY CORPORATION PACKETBLASTER

. . . continued from previous page

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Rapid flash	Network connection is not established
LED1	Green	Slow flash	Network connection is broken
LED1	Green	Off	Network connection is not loaded
LED2	Green	On	Network connection is good
LED2	Green	Rapid flash	Network connection is not established
LED2	Green	Slow flash	Network connection is broken
LED2	Green	Off	Network connection is not loaded