SYSKONNECT, INC.
SK-4590, SK-4591

Card Type	Network Interface Card
NIC Type	Token Ring
Maximum Onboard Memory	128KB DRAM, 512KB DRAM (SK-4590 only)
Boot ROM	Unidentified
Network Transfer Rate	4/16Mbps
Topology	Star
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
Data Bus	32-bit PCI
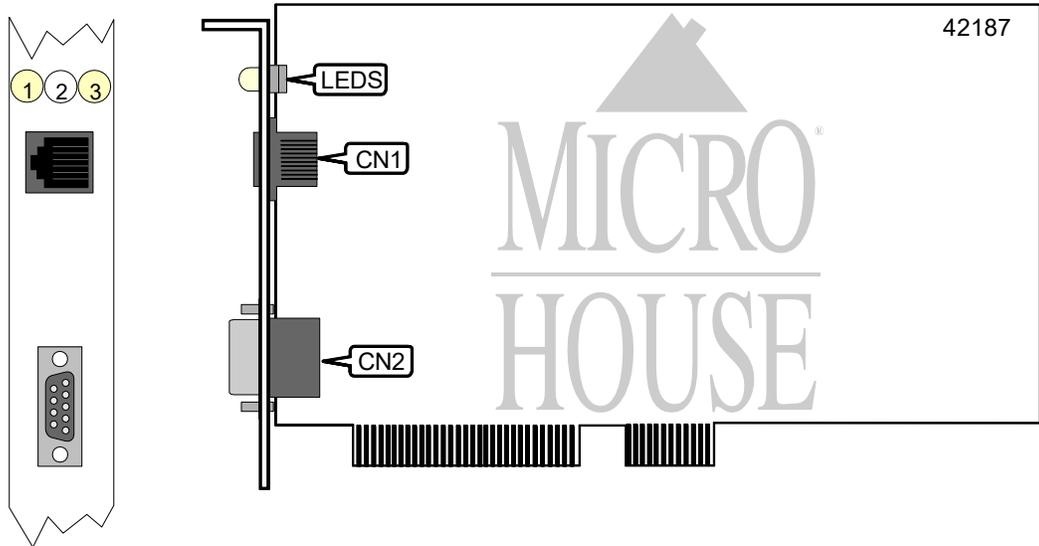
CONNECTIONS			
Function	Label	Function	Label
UTP via RJ-45 connector	CN1	STP via DB-9 connector	CN2

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Data is being transmitted/received at 4Mbps
LED1	Yellow	Off	Data is not being transmitted/received at 4Mbps
LED3	Yellow	On	Data is being transmitted/received at 16Mbps
LED3	Yellow	Off	Data is not being transmitted/received at 16Mbps
Note: Exact color and function of LED2 are unidentified.			