


EICON TECHNOLOGY CORPORATION

EICONCARD P62

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	512KB DRAM
Boot ROM	Not available
Network Transfer Rate	2Mbps
Topology	Star
Wiring Type	VHSI (Very High-Speed Interface) high density cable
Data Modulation Protocol	V.24, V.35, EIA-530, V.36,/RS-449, OR X.21
Data Bus	16-bit ISA

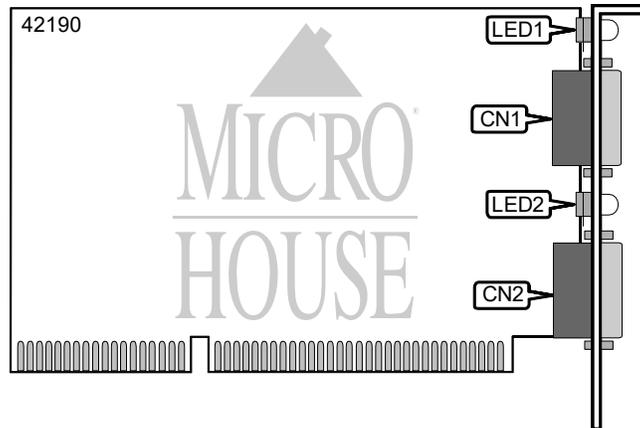

CONNECTIONS			
Function	Label	Function	Label
36-pin VHSI port	CN1	36-pin VHSI port	CN2

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Unidentified	On	Network connection is good
LED1	Unidentified	Rapid Blinking	Network connection not yet established
LED1	Unidentified	Slow Blinking	Network connection interrupted
LED1	Unidentified	Off	Network connection is broken
LED2	Unidentified	On	Network connection is good
LED2	Unidentified	Rapid Blinking	Network connection not yet established
LED2	Unidentified	Slow Blinking	Network connection interrupted
LED2	Unidentified	Off	Network connection is broken