


# EICON TECHNOLOGY CORPORATION

## EICONCARD P92

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	512KB DRAM
Boot ROM	Not available
Network Transfer Rate	2Mbps
Topology	Star
Wiring Type	VHSI (Very High-Speed Interface) high density cable
Data Modulation Protocol	V.24, V.35, EIA-530, V.36,/RS-449, OR X.21
Data Bus	32-bit PCI

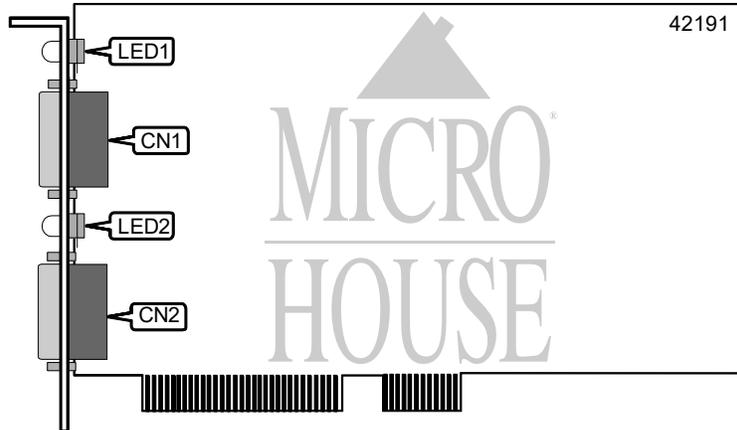

CONNECTIONS				
Function	Label	Function	Label	
36-pin VHSI port	CN1	36-pin VHSI port	CN2	

DIAGNOSTIC LED(S)				
LED	Color	Status	Condition	
LED1	Unidentified	On	Network connection is good	
LED1	Unidentified	Rapid Blinking	Network connection not yet established	
LED1	Unidentified	Slow Blinking	Network connection interrupted	
LED1	Unidentified	Off	Network connection is broken	
LED2	Unidentified	On	Network connection is good	
LED2	Unidentified	Rapid Blinking	Network connection not yet established	
LED2	Unidentified	Slow Blinking	Network connection interrupted	
LED2	Unidentified	Off	Network connection is broken	