


SIIG, INC. E-LAN 200

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	Unidentified
Topology	Linear Bus, Star
Wiring Type	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA

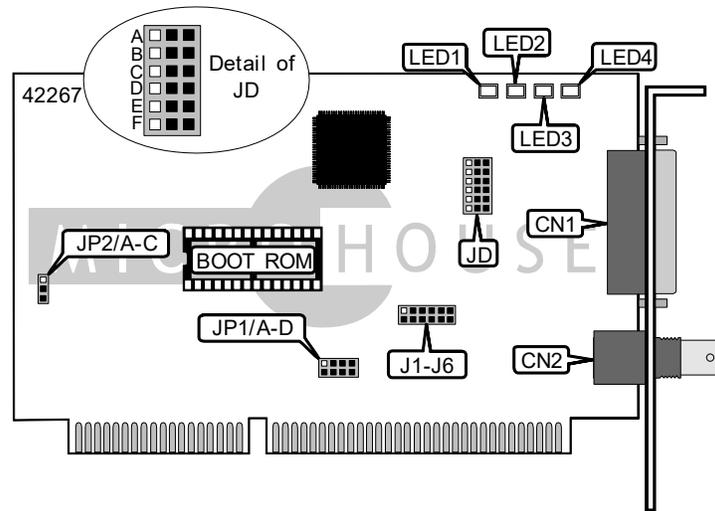

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	CN1	RG-58A/U connector	CN2

BUS COMPATIBILITY SELECTION	
Setting	JP2
í AT BUS Timing compatible	Pins A & B closed
Not fully AT compatible	Pins B & C closed

BASE I/O ADDRESS SELECTION		
Setting	J1	J2
í 300h	Closed	Closed
320h	Open	Closed
340h	Closed	Open
360h	Open	Open

INTERRUPT SELECTION				
IRQ	JP1/A	JP1/B	JP1/C	JP1/D
2	Closed	Open	Open	Open
í 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

Continued on next page. . .

. . . continued from previous page

CABLE TYPE SELECTION						
Type	JD/A	JD/B	JD/C	JD/D	JD/E	JD/F
í RG-58A/U 50ohm coaxial	Pins 1 & 2					
AUI transceiver via DB-15 port	Pins 2 & 3					

Note: Designated pins are closed.

BOOT ROM CONFIGURATION	
Setting	J6
í Disabled	Open
Enabled	Closed

ROM ADDRESS SELECTION			
Address	J3	J4	J5
C000h	Closed	Closed	Closed
C400h	Open	Closed	Closed
í C800h	Closed	Open	Closed
CC00h	Open	Open	Closed
D000h	Closed	Closed	Open
D400h	Open	Closed	Open
D800h	Closed	Open	Open
DC00h	Open	Open	Open

DIAGNOSTIC LED(S)
Note: Functions of LED1, LED2, LED3, and LED4 are unidentified.