


# ACTIX SYSTEMS, INC. GRAPHICS ENGINE

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** S3 86C928  
**Highest Resolution Supported** 1280 x 1024  
**Data Bus Type** 32-bit VESA local bus  
**Memory Type** DRAM  
**Maximum Onboard Memory** 2048KB

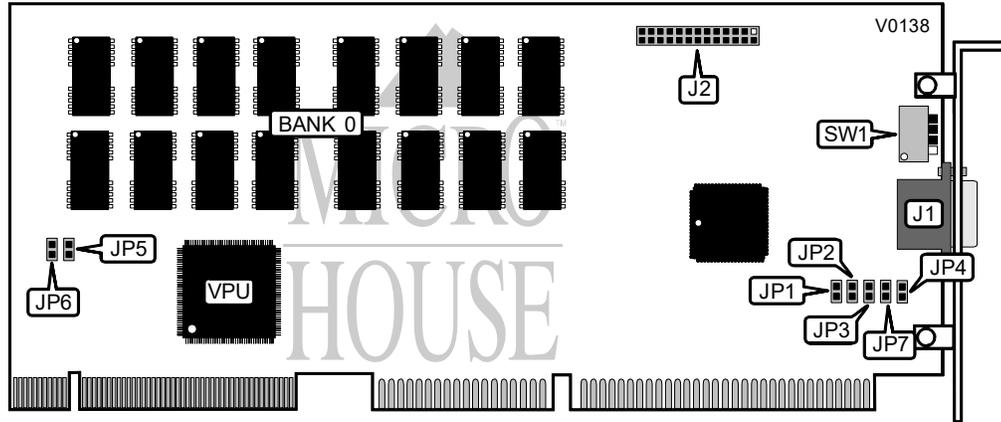

| CONNECTIONS              |          |                       |          |
|--------------------------|----------|-----------------------|----------|
| Purpose                  | Location | Purpose               | Location |
| 15-pin analog video port | J1       | VGA feature connector | J2       |

| INTERRUPT CONFIGURATION |        |
|-------------------------|--------|
| IRQ 2/9                 | JP4    |
| Disabled                | Open   |
| Enabled                 | Closed |

| MONITOR TYPE SELECTION |      |       |
|------------------------|------|-------|
| Type                   | SW1/ | SW1/; |
| VGA, Super VGA         | Off  | Off   |
| Multi-sync 48KHz       | Off  | On    |
| Multi-sync 64KHz       | On   | Off   |
| Multi-sync 78KHz       | On   | On    |

Continued on next page . . .

ACTIX SYSTEMS, INC.  
GRAPHICS ENGINE

| FACTORY CONFIGURED - DO NOT ALTER |          |
|-----------------------------------|----------|
| Jumper/Switch                     | Position |
| JP1                               | Open     |
| JP2                               | Open     |
| JP3                               | Open     |
| JP5                               | Open     |
| JP6                               | Open     |
| JP7                               | Open     |
| SW1/3                             | Off      |
| SW1/4                             | On       |