


ACTIX SYSTEMS, INC.
 PROSTAR

Category Video
Video Types Supported XVGA
Video Processor CL5428
Highest Resolution Supported 1024 X 768
Data Bus Type 32-bit VESA Local Bus
Memory Type DRAM
Maximum Onboard Memory 1024KB

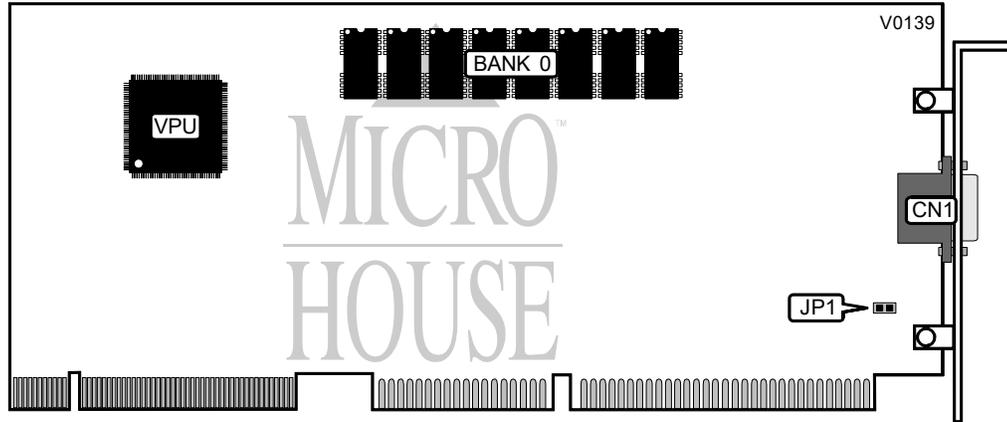

CONNECTIONS	
Purpose	Location
15-pin analog port	CN1

VIDEO INTERRUPT CONFIGURATION	
IRQ 2/9	JP1
Disabled	Open
Enabled	Closed