


ACTIX SYSTEMS, INC. GRAPHICS ENGINE 32PLUS/2MB

Category Video
Video Types Supported XVGA
Video Processor S3 86C801
Highest Resolution Supported 1280 x 1024
Data Bus Type 16-bit ISA
Memory Type DRAM
Maximum Onboard Memory 2048KB

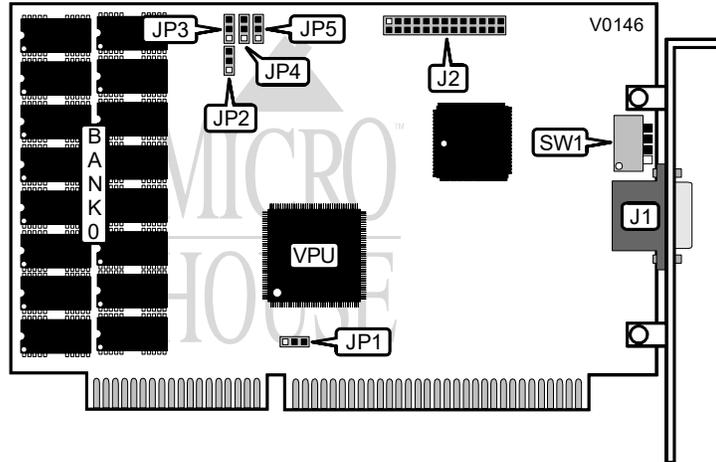

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	J1	VESA Feature connector	J2

INTERRUPT CONFIGURATION	
IRQ 2/9	JP1
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed

MONITOR TYPE SELECTION			
Type	Refresh	1280 x 1024	S V1/1
VGA, Super VGA	N/A	Off	Off
Multisync, 48KHz	N/A	Off	On
Multisync, 57KHz	43.5Hz	On	Off
Multisync, 64KHz	60Hz	On	On

Continued on next page . . .

ACTIX SYSTEMS, INC.
GRAPHICS ENGINE 32/32 PLUS

... continued from previous page

TURBO MODE CONFIGURATION	
Setting	SW1/3
Disabled	Off
Enabled	On

BUS WIDTH SELECTION	
Setting	SW1/4
8-bit	On
16-bit	Off

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JP2	Pins 1 & 2 closed
JP3	Pins 1 & 2 closed
JP4	Pins 1 & 2 closed
JP5	Pins 1 & 2 closed