


PIXELWORKS, INC.
RA1280, RA1024

Category	Video
Video Types Supported	CGA/XVGA
Video Processor	TMS34020
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	2560KB

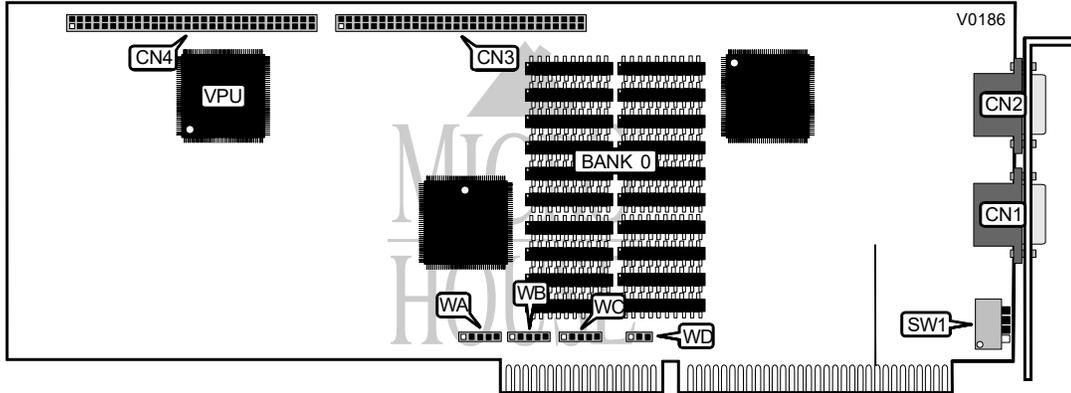

CONNECTIONS			
Purpose :	Location	Purpose :	Location
VGA pass-through connector	CN1	Daughter board connector	CN3
15-pin analog video port	CN2	Daughter board connector	CN4

I/O BASE ADDRESS SELECTION	
Address	WD
330h	Pins 1 & 2 closed
340h	Pins 2 & 3 closed

DMA CHANNEL SELECTION		
DM/	WA	WB
6	Pins 1 & 2 closed	Pins 1 & 2 closed
7	Pins 2 & 3 closed	Pins 2 & 3 closed
5	Pins 4 & 5 closed	Pins 4 & 5 closed

... continued from previous page

... continued from previous page

VIDEO INTERRUPT SELECT	
IRQ	WC
í 10	Pins 1 & 2 closed
11	Pins 2 & 3 closed
12	Pins 4 & 5 closed

MONITOR TYPE SELECTION				
Type	SW1/1	SW1/2	SW1/3	SW1/4
CGA	On	Off	Off	Off
VGA pass-through	Off	On	Off	Off
Dual monitor	Off	Off	Off	Off