


CONTROL CORPORATION HOSTESS I/S 2

| | |
|---------------------------|--------------------------|
| Card Type | I/O controller |
| Chipset/Controller | Texas Instruments (UART) |
| I/O Options | Serial ports (2) |
| Maximum DRAM | 8MB |

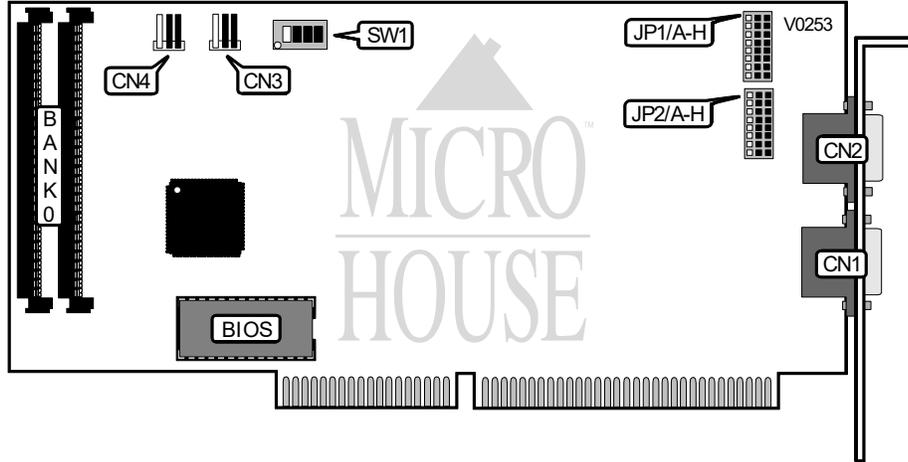

| CONNECTIONS | | | |
|---------------|----------|----------------------------|----------|
| Purpose : | Location | Purpose : | Location |
| Serial port 1 | CN1 | External reset connector 1 | CN3 |
| Serial port 2 | CN2 | External reset connector 2 | CN4 |

| RS-232/RS-422 MODE SELECTION | | |
|------------------------------|-------------------|-------------------|
| Mode | JP1/A- | JP2/A- |
| RS-422 | Pins 2 & 3 closed | Pins 2 & 3 closed |
| RS-232 | Pins 1 & 2 closed | Pins 1 & 2 closed |

Continued on next page . . .

CONTROL CORPORATION
HOSTESS I/S 2

... continued from previous page

| I/O ADDRESS CONFIGURATION | | | | |
|---------------------------|-------|-------|-------|-------|
| Address | SW1/1 | SW1/2 | SW1/3 | SW1/4 |
| 218h | Off | Off | Off | Off |
| 21Ch | On | Off | Off | Off |
| 238h | Off | On | Off | Off |
| 23Ch | On | On | Off | Off |
| 318h | Off | Off | On | Off |
| 31Ch | On | Off | On | Off |
| 338h | Off | On | On | Off |
| 33Ch | On | On | On | Off |
| 618h | Off | Off | Off | On |
| 61Ch | On | Off | Off | On |
| 638h | Off | On | Off | On |
| 63Ch | On | On | Off | On |
| 718h | Off | Off | On | On |
| 71Ch | On | Off | On | On |
| 738h | Off | On | On | On |
| 73Ch | On | On | On | On |

| DRAM CONFIGURATION | |
|--------------------|--------------|
| Size | Bank 0 |
| 512KB | (2) 256K x 9 |
| 2MB | (2) 1M x 9 |
| 8MB | (2) 4M x 9 |