


# CONTROL CORPORATION HOSTESS RJ45

**Card Type** I/O controller  
**Chipset/Controller** Unknown  
**I/O Options** Serial ports (4)  
**Maximum DRAM** N/A

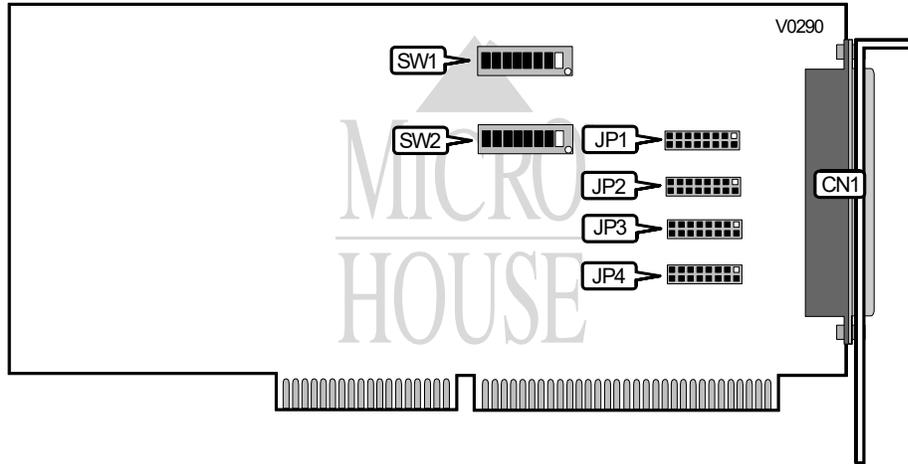

CONNECTIONS	
Purpose	Location
100 Pin interface connector	CN1

I/O ADDRESS CONFIGURATION								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100h	On	On	On	Off	On	On	On	On
140h	On	Off	On	Off	On	On	On	On
200h	On	On	On	On	Off	On	On	On
240h	On	Off	On	On	Off	On	On	On
280h	On	On	Off	On	Off	On	On	On
500h	On	On	On	Off	On	Off	On	On
540h	On	Off	On	Off	On	Off	On	On
580h	On	On	Off	Off	On	Off	On	On
600h	On	On	On	On	Off	Off	On	On
640h	On	Off	On	On	Off	Off	On	On
680h	On	On	Off	On	Off	Off	On	On
700h	On	On	On	Off	Off	Off	On	On

Continued on next page...

COMTROL CORPORATION  
HOSTESS RJ45

... Continued from previous page

I/O INTERRUPT SELECTION (MASK ENABLE ON)								
IRQ	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
IRQ2	On	On	Off	Off	Off	Off	Off	Off
IRQ3	On	Off	On	Off	Off	Off	Off	Off
IRQ4	On	Off	Off	On	Off	Off	Off	Off
IRQ5	On	Off	Off	Off	On	Off	Off	Off
IRQ10	On	Off	Off	Off	Off	On	Off	Off
IRQ11	On	Off	Off	Off	Off	Off	On	Off
IRQ12	On	Off	Off	Off	Off	Off	Off	On

I/O INTERRUPT SELECTION (MASK ENABLE OFF)								
IRQ	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
IRQ2	Off	On	Off	Off	Off	Off	Off	Off
IRQ3	Off	Off	On	Off	Off	Off	Off	Off
IRQ4	Off	Off	Off	On	Off	Off	Off	Off
IRQ5	Off	Off	Off	Off	On	Off	Off	Off
IRQ10	Off	Off	Off	Off	Off	On	Off	Off
IRQ11	Off	Off	Off	Off	Off	Off	On	Off
IRQ12	Off	On						

RS-232/RS-422 MODE SELECTION		
Jumper	RS-232	RS-422
JP1-4	Pins 1 & 2, 5 & 6, 9 & 10, 11 & 12, 15 & 16	Pins 1 & 3, 5 & 7, 8 & 10, 11 & 13, 14 & 16
Note: Pins designated should be in the closed position.		