


# AITECH INTERNATIONAL CORPORATION

## VIDEOSURGE

<b>Category</b>	Video/Sound
<b>Video Types Supported</b>	XVGA
<b>Video Processor</b>	Chips & Technology
<b>Highest Resolution Supported</b>	1024 x 768
<b>Data Bus Type</b>	16-bit ISA
<b>Memory Type</b>	N/A
<b>Maximum Onboard Memory</b>	None

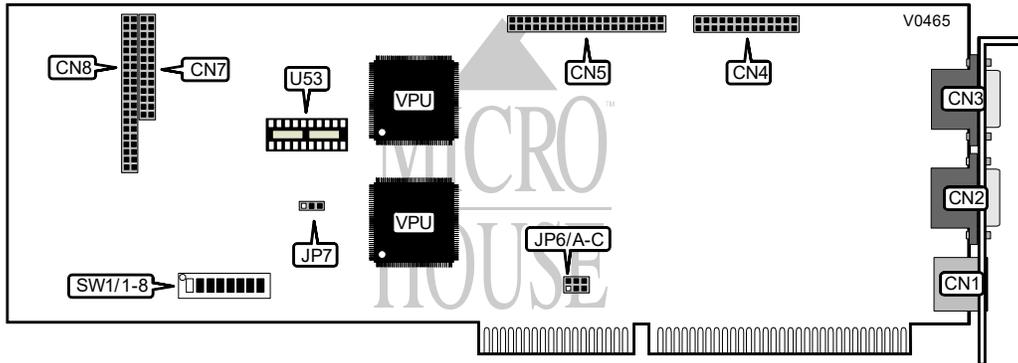

CONNECTIONS			
Purpose	Location	Purpose	Location
4-pin DIN socket - S-Video input	CN1	WaveLength Bus connector	CN5
Video input	CN2	WaveLength Bus connector	CN7
15-pin analog video port	CN3	WaveLength Bus connector	CN8
VESA feature connector	CN4	Chroma-Key chip socket	U53

Note: CN5, CN6, CN7, and CN8 are used to connect proprietary hardware.

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
JP7	Pins 1 & 2 closed
SW1/1	On
SW1/2	On

Note: the factory strongly recommends not altering default settings for JP7 and SW1.

Continued on next page . . .

**AITECH INTERNATIONAL CORPORATION**  
**VIDEOSURGE**

. . . continued from previous page

INTERRUPT SELECTION			
IRQ	JP6/A	JP6/B	JP6/C
IRQ10	Closed	Open	Open
IRQ11	Open	Closed	Open
IRQ12	Open	Open	Closed