


RELIALOGIC CORPORATION PRIVATE, LTD.  
 VL 36  
 JATON CORPORATION  
 JAX 8236

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** TVGA9200CXr/TVGA9400CXi  
**Highest Resolution Supported** 1280 X 1024  
**Data Bus Type** VESA local bus  
**Memory Type** DRAM  
**Maximum Onboard Memory** 2048KB

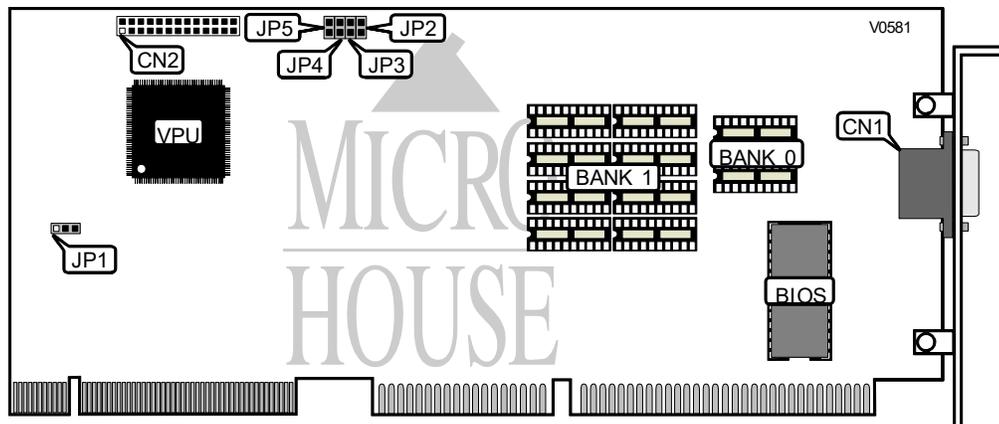

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VGA Feature Connector	CN2

VL-BUS TIMING	
Setting	JP1
Standard timing	Pins 2 & 3 closed
Alternate timing	Pins 1 & 2 closed

FACTORY CONFIGURED JUMPER	
Jumper	Setting
JP2	open

VL-BUS SPEED	
Setting	JP3
<=33MHz	Open
>33MHz	Closed

Continued on next page. . .

RELIALOGIC CORPORATION PRIVATE, LTD.  
 VL 36  
 JATON CORPORATION  
 JAX 8236

...continued from previous page

SCAN RATE SELECT	
Setting	JP4
f < 48.7 KHz	Closed
48.7 KHz	Open

DRAM SPEED SELECT	
Setting	JP5
f 80ns	Closed
70ns/60ns	Open

MEMORY CONFIGURATION		
Setting	Bank 0	Bank 1
1024KB	(2) 512K X 8	NONE
1024KB	NONE	(8) 256K X 4
2048KB	(2) 512K X 8	(8) 256K X 4