


PIXELWORKS, INC.
RA1280, RA1024

Category Video
Video Types Supported XVGA
Video Processor Pixelworks(location unidentified)
Highest Resolution Supported 1280x1024 (RA1280), 1024x768 (RA1024)
Data Bus Type 16-bit ISA
Memory Type DRAM
Maximum Onboard Memory Unidentified

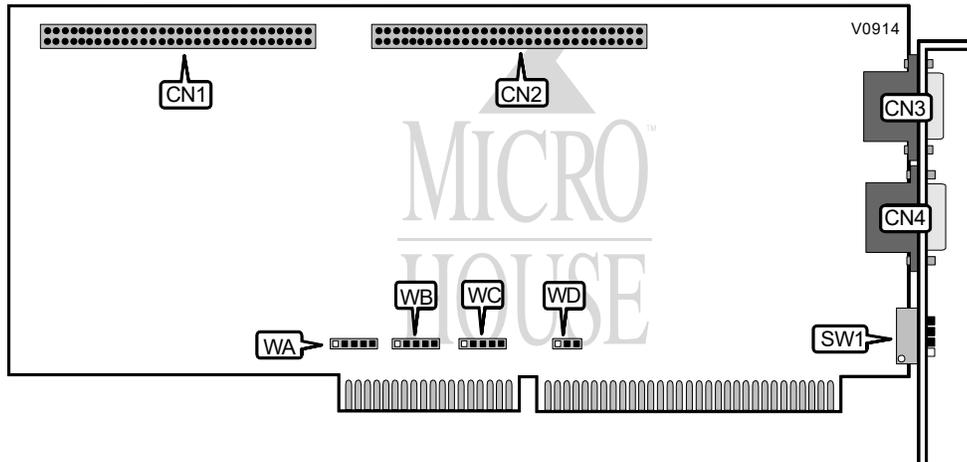

CONNECTIONS			
Purpose	Location	Purpose	Location
BLIT accelerator board connector	CN1	15-pin analog video port(output)	CN3
BLIT accelerator board connector	CN2	9-pin video passthrough(input)	CN4

I/O ADDRESS SELECTION	
Address	WD
330h	Pins 1 & 2 closed
340h	Pins 2 & 3 closed

DMA SELECTION		
DMA	W ₁	W ₂
5	Pins 4 & 5 closed	Pins 4 & 5 closed
6	Pins 1 & 2 closed	Pins 1 & 2 closed
7	Pins 2 & 3 closed	Pins 2 & 3 closed

Continued on next page...

INTERRUPT SELECT	
IRQ	WC
IRQ10	Pins 1 & 2 closed
IRQ11	Pins 2 & 3 closed
IRQ12	Pins 4 & 5 closed

VIDEO CONFIGURATION				
Setting	SW1/1	SW1/2	SW1/3	SW1/4
CGA emulation enabled	On	Off	Off	Off
VGA pass-through enabled	Off	On	Off	Off
Dual Monitor mode enabled	Off	Off	Off	Off

VIDEO WIRE CONFIGURATION		
Setting	SW /3	SW /4
3-wire	Off	Off
4-wire	On	Off
5-wire	On	On