

Gator EPIC

Motherboard Installation Guide

Table of Contents

Introduction	IV
Chapter 1 Pre-Configuration	1
Step 1 Setting the Jumpers	2
Jumper Locations.....	3
CMOS Reset	4
ATA-Disk Connector Voltage Selection	4
RS422/RS485 Termination Resistors (optional).....	4
Audio Jack Output Selection	4
Backlight Logic Voltage Selection.....	5
Inverter Voltage Selection	5
Step 2 SDRAM and Cables Installation.....	5
Gator EPIC Memory Configuration	5
Installing Cables	5
Power and Control Panel Cables	5
Installing Peripheral Cables	5
Index of Connectors.....	9
Chapter 2 AMIBIOS8 Setup.....	10
Main Setup	13
Advanced BIOS Setup	13
PCI/PnP Setup.....	22
Boot Setup	24
Security Setup	26
Chipset Setup	27
Power Management Setup.....	30
Exit Menu.....	30
Chapter 3 Upgrading	32
Upgrading the System Memory	32
Appendix A Technical Specifications.....	33
Chipsets	33
BIOS	33
Embedded I/O	33
Industrial Devices.....	35
Miscellaneous.....	35
Memory Map.....	36
DMA Channels	36
I/O Map.....	36
PCI Configuration Space Map	37

Interrupts.....	38
SMBUS.....	38
PCI Interrupt Routing Map.....	38
Connectors Pin-out.....	39

Appendix B Flash BIOS programming and codes47

Troubleshooting POST	47
Critical Error BEEP Codes.....	51

Appendix C On-Board Industrial Devices53

On-board Ethernet.....	53
Serial Ports.....	53

Appendix On-Board Video Controller59

Notice

The company reserves the right to revise this publication or to change its contents without notice. Information contained herein is for reference only and does not constitute a commitment on the part of the manufacturer or any subsequent vendor. They are in no way responsible for any loss or damage resulting from the use (or misuse) of this publication.

This publication and any accompanying software may not, in whole or in part, be copied, photocopied, translated or reduced to any machine readable form without prior consent from the vendor, manufacturer or creators of this publication, except for copies kept by the user for backup purposes.

Brand and product names mentioned in this publication may or may not be copyrights and/or registered trademarks of their respective companies. They are mentioned for identification purposes only and are not intended as an endorsement of that product or its manufacturer.

First Edition.

©May 2006

Introduction

Thank you for your purchase of the Gator EPIC industrial embedded motherboard. The Gator EPIC design was based on the Intel 855GME chipset providing the ideal platform to industrial applications. The Gator EPIC design is based on the Intel LV Pentium M and ULV Celeron M processors.

With proper installation and maintenance, your Gator EPIC will provide years of high performance and trouble free operation.

This manual provides a detailed explanation into the installation and use of the Gator EPIC industrial embedded motherboard. This manual is written for the novice PC user/installer. However, as with any major computer component installation, previous experience is helpful and should you not have prior experience, it would be prudent to have someone assist you in the installation. This manual is broken down into 3 chapters and 4 appendixes.

Chapter 1 - System Board Pre-Configuration

This chapter provides all the necessary information for installing the Gator EPIC. Topics discussed include: DRAM installation and jumper settings. Connecting all the cables from the system board to the chassis and peripherals is also explained.

Chapter 2 - BIOS Configuration

This chapter shows the final step in getting your system firmware setup.

Chapter 3 - Upgrading

The Gator EPIC provides expansion options for memory. All aspects of the upgrade possibilities are covered.

Appendix A - Technical Specifications

A complete listing of all the major technical specifications of the Gator EPIC is provided.

Appendix B - Flash BIOS Programming and Codes

Provides all information necessary to program your AMIBIOS8 Flash BIOS. POST Codes and beep codes are described in details.

Appendix C – On-Board Industrial Devices

One on-board 10/100 (10/100/1000 optional) Ethernet controller, and two or six serial ports (one optional RS422/485).

Appendix D - On-Board Video Controller

On-board CRT and LVDS video controller.

Static Electricity Warning!

The Gator EPIC has been designed as rugged as possible but can still be damaged if jarred sharply or struck. Handle the motherboard with care.

The Gator EPIC also contains delicate electronic circuits that can be damaged or weakened by static electricity. Before removing the Gator EPIC from its protective packaging, it is strongly recommended that you use a grounding wrist strap. The grounding strap will safely discharge any static electricity build up in your body and will avoid damaging the motherboard. Do not walk across a carpet or linoleum floor with the bare board in hand.

Warranty

This product is warranted against material and manufacturing defects for two years from the date of delivery. Buyer agrees that if this product proves defective the manufacturer is only obligated to repair, replace or refund the purchase price of this product at manufacturer's discretion. The warranty is void if the product has been subjected to alteration, misuse or abuse; if any repairs have been attempted by anyone other than the manufacturer; or if failure is caused by accident, acts of God, or other causes beyond the manufacturer's control.

Gator EPIC - An Overview

The Gator EPIC represents the ultimate in industrial embedded motherboard technology. The board measures a compact 4.5"x 6.5", ideal for deeply embedded computing applications. Its low-profile design also allows proper clearance for 1U rack-mount chassis and other low profile cases. No other system board available today provides such impressive list of features:

CPU Support

- Supports low power/ultra low power series of Intel LV Pentium M and ULV Celeron M 400MHz PSB processors, allowing high performance with low thermal envelopes.

Supported Bus Clocks

- 400MHz.

Memory

- One SODIMM socket up to 1GB (unbuffered, ECC & non-ECC) DDR SDRAM, PC1600 (DDR 200MHz), PC2100 (DDR 266MHz) and PC2700 (DDR 333MHz). Please, refer to chapter 3 for memory details.

On-Board I/O

- PCI 32-bit EIDE controller – UDMA 66/100 supported. One mini-Header 44-pin for Solid State IDE disk or any 44-pin IDE device support.
- Dual independent Serial ATA ports with transfer rates up to 150 MB/s per port.
- Two/Six high speed RS-232 serial ports 16 Bytes FIFO (16550). COM2 optional RS-232 IrDA and COM1 optional RS-422/485.
- One bi-directional parallel port. EPP/ECP mode compatible.
- One mouse/keyboard connector.
- Six Universal Serial Bus connectors, USB 1.1 and USB 2.0 compliant.

- One (1) 32-bit PC/104-*Plus* expansion One (1) Mini-PCI slot (PCI 2.2 33MHz 32-bit 124-pin connector Type III).
- One 10/100 Ethernet connector (optional 10/100/1000).
- Power Button – advanced management support.
- Automatic CPU voltage & temperature monitoring device.
- Audio (AD1981B) AC97 compliant. Microphone In, Stereo Line In and Out, Stereo Headphone Out and CD In.
- On-board buzzer.

ROM BIOS

- American Megatrends AMIBIOS8 with FLASH ROM.

On-Board CRT & LVDS video controller

- Standard CRT video controller (Intel 855GME chipset).
- Dedicated Local Flat Panel (LFP) LVDS interface.

Conventions Used in this Manual



Notes - Such as a brief discussion of memory types.



Important Information - such as static warnings, or very important instructions.



When instructed to enter keyboard keystrokes, the text will be noted by this graphic.

Chapter 1

Pre-Configuration

This chapter provides all the necessary information for installing the Gator EPIC into a standard PC chassis. Topics discussed include the SODIMM DRAM installation and jumper settings.

Handling Precautions

The Gator EPIC has been designed to be as rugged as possible but it can be damaged if dropped, jarred sharply or struck. Damage may also occur by using excessive force in performing certain installation procedures such as forcing the system board into the chassis or placing too much torque on a mounting screw.

Take special care when installing or removing the system memory DIMMs. Never force a DIMM into a socket. Screwdrivers slipping off a screw and scraping the board can break a trace or component leads, rendering the board unusable. Always handle the Gator EPIC with care.



Special Warranty Note:

Products returned for warranty repair will be inspected for damage caused by improper installation and misuse as described in the previous section and the static warning below. Should the board show signs of abuse, the warranty will become void and the customer will be billed for all repairs and shipping and handling costs.

Static Warning

The Gator EPIC contains delicate electronic semiconductors that are highly sensitive to static electricity. These components, if subjected to a static electricity discharge, can be weakened thereby reducing the serviceable life of the system board. BEFORE THE BOARD IS REMOVED FROM ITS PROTECTIVE ANTISTATIC PACKAGING, TAKE PROPER PRECAUTIONS! Work on a conductive surface that is connected to the ground. Before touching any electronic device, ground yourself by touching an unpainted metal object or, and highly recommended, use a grounding strap.

Step 1 **Setting the Jumpers**

Your Gator EPIC is equipped with a large number of peripherals. As such, there are a large number of configuration jumpers on the board. Taken step by step, setting these jumpers is easy. We suggest you review each section and follow the instructions.



Special note about operating frequency:
The Gator EPIC has the ability to run at a variety of speeds without the need to change any crystal, oscillator or jumper.

Jumper Types

Jumpers are small copper pins attached to the system board. Covering two pins with a shunt closes the connection between them. The Gator EPIC examines these jumpers to determine specific configuration information. There are two different categories of jumpers on the Gator EPIC.

A. Two pin jumpers are used for binary selections such as enable, disable. Instructions for this type of jumper are open, for no shunt over the pins or closed, when the shunt covers the pins.

B. Three or four pin jumpers are used for multiple selections. Instructions for these jumpers will indicate which two pins to cover. For example: for JPx 2-3 the shunt will be covering pins 2 and 3 leaving pins 1 and 4 exposed.


How to identify pin number 1 on *Figure 1-1*: Looking to the solder side (The board side with fewer components) of the PCB (Printed Circuit Board), pin number 1 will have a squared pad ■. Other pins will have a circular pad ●. They are numbered sequentially.

Double row jumpers are numbered alternately, i.e. pin number 2 is in the other row, but in the same column of pin number 1. Pin number 3 is in the same row of pin 1, but in the next column and so forth.

Jumper Locations

Use the diagram below and the tables on the following pages to locate and set the on-board configuration jumpers.

Figure 1-1 Jumper Locations

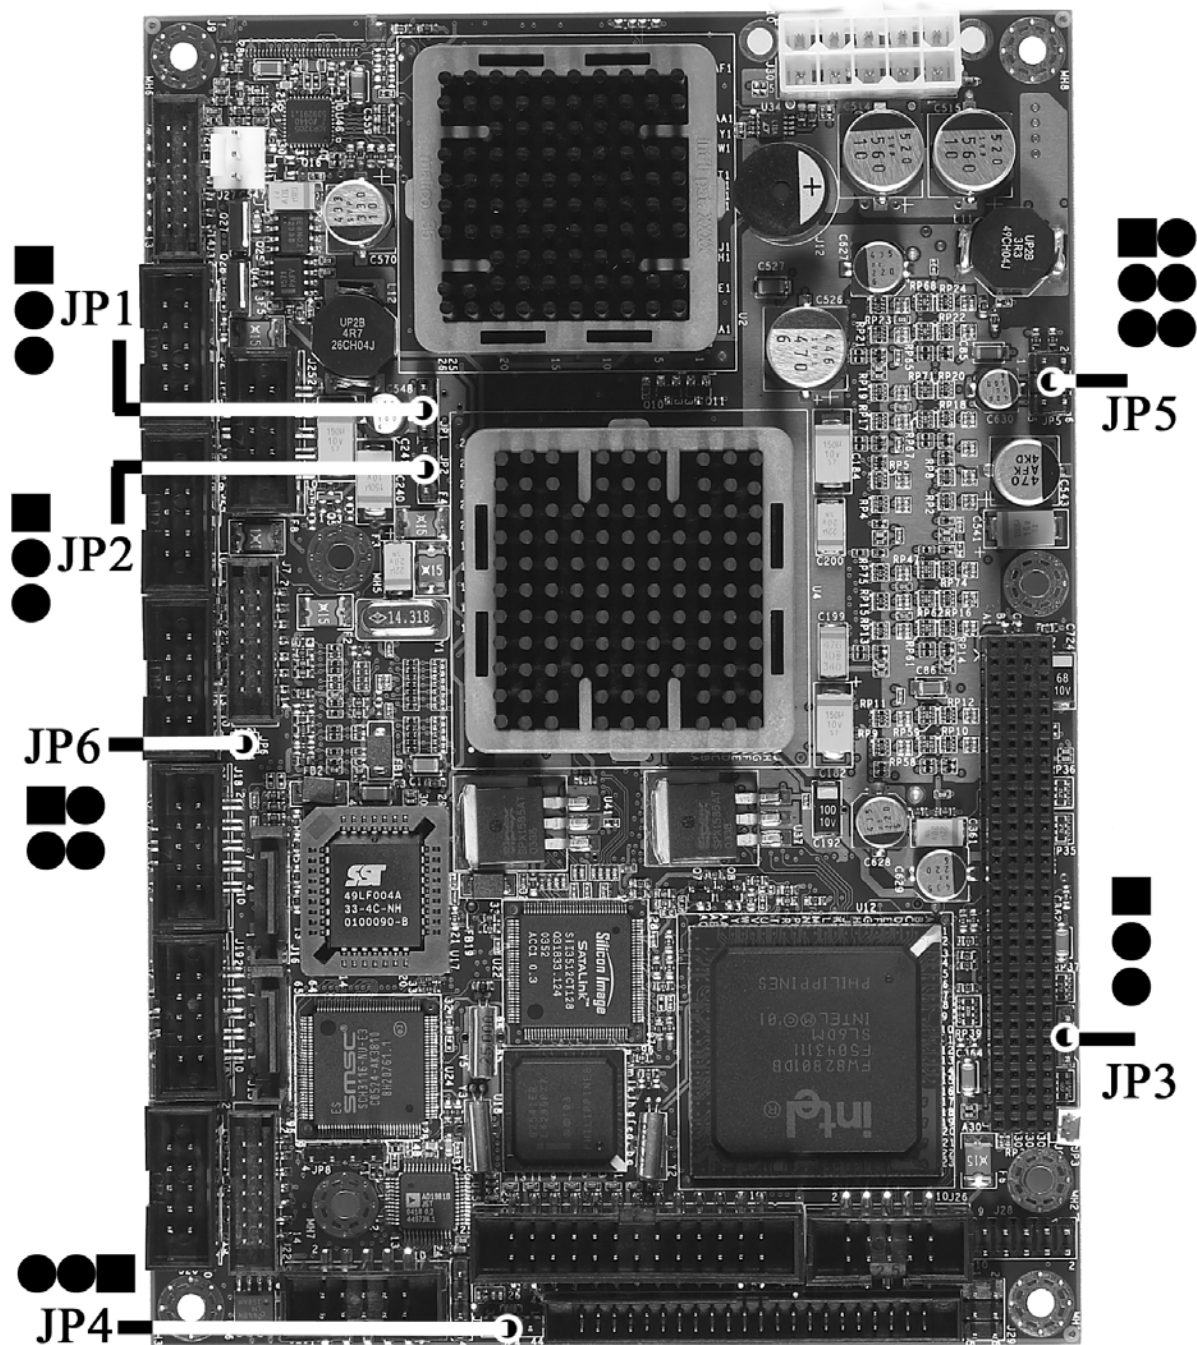

CMOS Reset

This option is provided as a convenience for those who need to reset the CMOS registers. It should always be set to "Normal" for standard operation. If the CMOS needs to be reset, turn off the system, move JP3 to 2-3, turn the system on, move jumper to 1-2 and press reset.

Table 1-1 CMOS Reset

Reset CMOS	Normal	Clear CMOS
JP3	1-2*	2-3

* Manufacturer's Settings.

ATA-Disk Connector Voltage Selection

The ATA-Disk Connector J8 can provide either 5Vcc or 3.3Vcc. The jumper JP4 selects the voltage.

Table 1-2 ATA-Disk Connector Voltage Select

ATA-Disk Voltage	5Vcc	3.3Vcc
JP4	1-2*	2-3

*Manufacturer's Settings.

RS422/RS485 Termination Resistors (optional)

The Jumper JP6 allows the insertion/removal of the termination resistors (120Ω) in the Receiver and Transmitter lines of the COM1 when operating in RS-422/485 mode.

Table 1-3 COM1 RS-422/485 Tx & Rx Termination Resistor Selection

Termination resistor selection	Transmitter	Receiver
JP6	1-3	2-4

* Manufacturer's Setting is off.

Audio Jack Output Selection

The audio output on the header connector J2 can be selected to be stereo line out or stereo headphone out (amplified signal). The jumper JP5 selects the audio output signals.

Table 1-4 Audio Output Mode Selection

Audio Output Mode Selection	Headphone	Line Out
JP5	3-5, 4-6*	1-3, 2-4

* Manufacturer's Settings.

Backlight Logic Voltage Selection

The LVDS power connector J5 can supply either 5Vcc or 3.3Vcc for the logic circuits in the backlight inverter. The jumper JP1 selects the voltage.

Table 1-5 Backlight Logic Voltage Select

Backlight Logic Voltage	5Vcc	3.3Vcc
JP1	1-2	2-3*

* Manufacturer's Settings.

Inverter Voltage Selection

The LVDS power connector J5 can supply either 5Vcc or 12Vcc for the backlight inverter. The jumper JP2 selects the voltage.

Table 1-6 Inverter Voltage Select

Inverter Voltage	12Vcc	5Vcc
JP2	1-2	2-3*

* Manufacturer's Settings.

Step 2 SDRAM and Cables Installation

Depending upon how your Gator EPIC is configured you may need to install the following:

- SDRAM (SODIMM)

Gator EPIC Memory Configuration

The Gator EPIC offers 1 SODIMM memory sockets (Location J1 – *Figure 1-2*). It can be configured with 2.5V unbuffered SDRAM DDR modules. It is very important that the quality of the DIMM is good. Unreliable operation of the system may result if poor quality DIMMs are used. Always purchase your memory from a reliable source. Please, refer to chapter 3 for memory details.

Installing Cables

Power and Control Panel Cables

The Gator EPIC gets power from the EPIC power connector J30 (*Figure 1-2*).

Installing Peripheral Cables


Now it is a good time to install the internal peripherals such as CDROM and hard disk drives. Do not connect the power cable to these peripherals, as it is easier to attach the bulky ribbon cables before the smaller power


connectors. If you are installing more than one IDE drive double check your master/slave jumpers on the drives. Review the information supplied with your drive for more information on this subject.

Most modern HDDs are UDMA-5 capable. To make use of the Ultra DMA-5 capabilities, 80-conductor cables must be used. The BIOS and the HDD will check for the existence of the 80-conductor cable. The long leg of the cable must be connected to the board; otherwise it won't work as an 80-conductor cable. If connecting another peripheral that is not UDMA-5 capable (most optical devices are not), the whole IDE channel will be downgraded to UDMA-2. In that case, it is recommended to use a different IDE channel for the non-UDMA-5 capable peripherals.

Connect the SATA cables (not included) to the system. If using a Solid State Device, connect it to the mini-ATA connector. Connect all interface cables to their headers. Then connect remaining ends of the ribbon cable to the appropriate peripherals.

This concludes the hardware installation of your Gator EPIC system. Now it is a good time to re-check all of the cable connections to make sure they are correct.

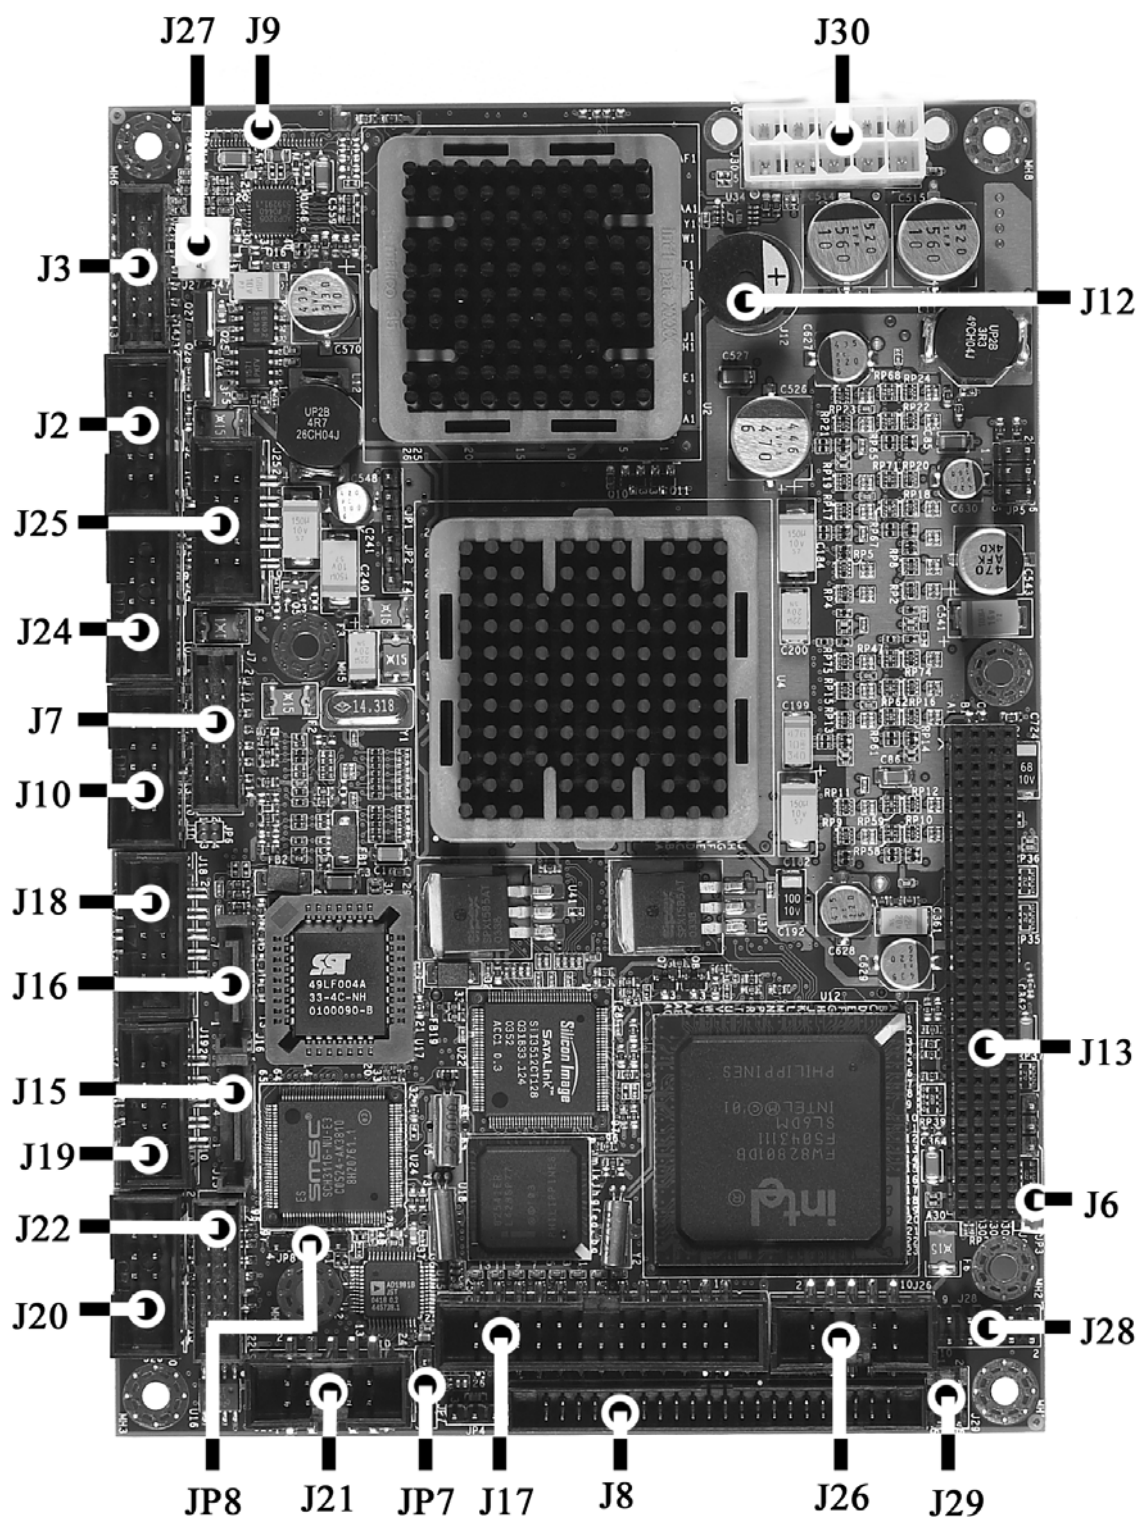Figure 1-2 Location of Components and Connectors

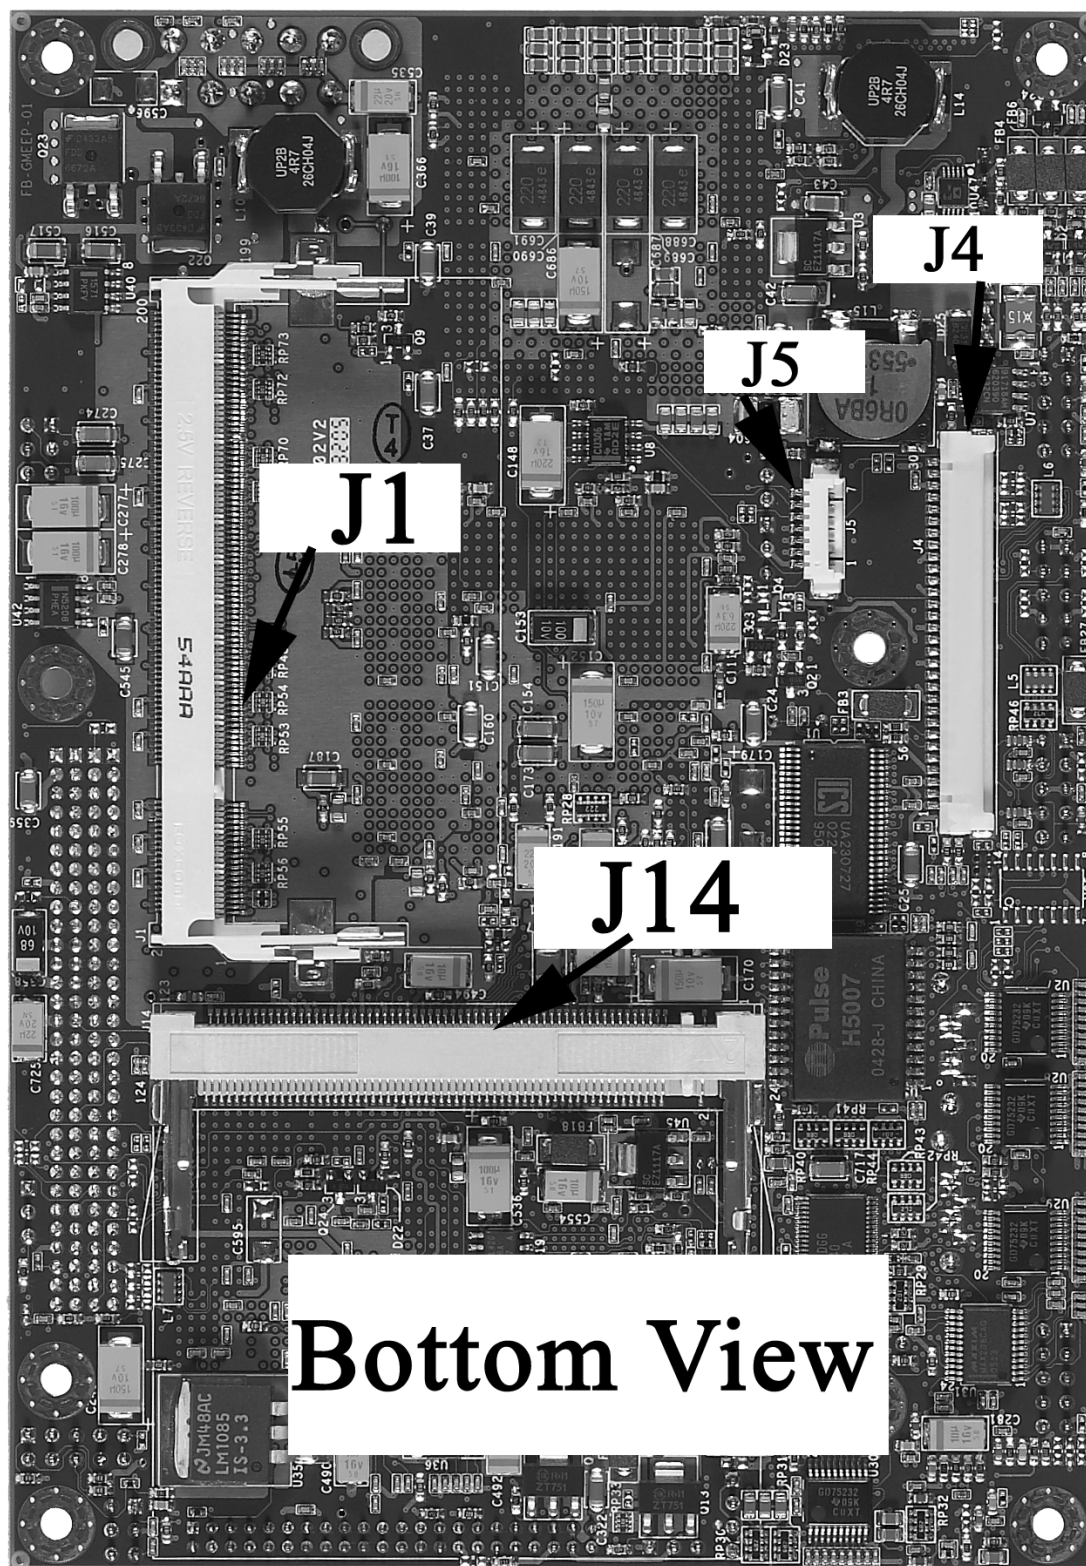

Index of Connectors

Please refer to Appendix A for pin-out descriptions.

Table 1-7 Connectors description

Connector	Description
J1	DDR SODIMM – Back side of the board
J2	Audio - Microphone In/ Line Out/Headphone Out
J3	VGA
J4	LVDS – Back side of the board
J5	LVDS Backlight – Back side of the board
J6	External RTC/CMOS Battery
J7	Ethernet (Optional 10/100/1000)
J8	IDE – 44-pin
J9	ITP
J10	Keyboard/Mouse
J12	Buzzer – Alt. Speaker Header
J13	PC104 PCI
J14	Mini-PCI Slot – Back side of the board
J15	Serial ATA 1
J16	Serial ATA 2
J17	LPT - Parallel Port
J18	COM1
J19	COM2
J20	COM3(Optional)
J21	COM4(Optional)
J22	COM5/COM6(Optional)
J24	USB (Ports 0 & 1)
J25	USB (Ports 2 & 3)
J26	USB (Ports 4 & 5)
J27	CPU Fan
J28	Front Panel Header
J29	IR
J30	Power Connector
JP7	Audio – CD In
JP8	Audio – Line In

User's Notes:

Chapter 2

AMIBIOS8 Setup

Your Gator EPIC features American Megatrends AMIBIOS8. The system configuration parameters are set via the BIOS setup. Since the BIOS Setup resides in the ROM BIOS, it is available each time the computer is turned on.

American Megatrends's AMIBIOS8 brand BIOS (Basic Input/Output System) pre-boot firmware is the industry's standard product used by most designers of X86 computer equipment in the world today. Its superior combination of configurability and functionality enables it to satisfy the most demanding ROM BIOS needs for x86 designers. Its modular architecture and high degree of configurability make it the most flexible BIOS in the world.

When your platform is powered on, AMIBIOS8 tests and initializes the hardware and programs the chipset and other peripheral components. During this time, Power On Self Test (POST) progress codes are written by the system BIOS to I/O port 80h, allowing the user to monitor the progress with a special monitor. Appendix B lists the POST codes and their meanings.

During early POST, no video is available to display error messages should a critical error be encountered; therefore, POST uses beeps on the speaker to indicate the failure of a critical system component during this time. Consult Appendix B for a list of Beep codes used by the BIOS.

Starting BIOS Setup

AMIBIOS has been integrated into many motherboards for over a decade. In the past, people often referred to the AMIBIOS setup menu as BIOS, BIOS setup, or CMOS setup.

American Megatrends refers to this setup as ezPORT. Specifically, it is the name of the AMIBIOS8 BIOS setup utility. This chapter describes the basic navigation of the ezPORT setup screens.

To enter the ezPORT setup screens, follow the steps below:

1 Power on the motherboard

2 Press the <Delete> key on your keyboard when you see the following text prompt:

Press DEL to run Setup

3 After you press the <Delete> key, the ezPORT main BIOS setup menu displays. You can access the other setup screens from the main BIOS setup menu, such as the Chipset and PCI/PnP menus.


BIOS Setup Main Menu

The ezPORT main BIOS setup menu is the first screen that you can navigate. Each main BIOS setup menu option is described in the Chapter 2.

The Main BIOS setup menu screen has two main frames. The left frame displays all the options that can be configured. "Grayed-out" options cannot be configured. Options in blue can be.

The right frame displays the key legend. Above the key legend is an area reserved for a text message. When an option is selected in the left frame, it is highlighted in white. Often a text message will accompany it.

The ezPORT BIOS setup/utility uses a key-based navigation system called hot keys. Most of the ezPORT BIOS setup utility hot keys can be used at any time during the setup navigation process. These keys include <F1>, <F10>, <Enter>, <ESC>, <Arrow> keys, and so on.

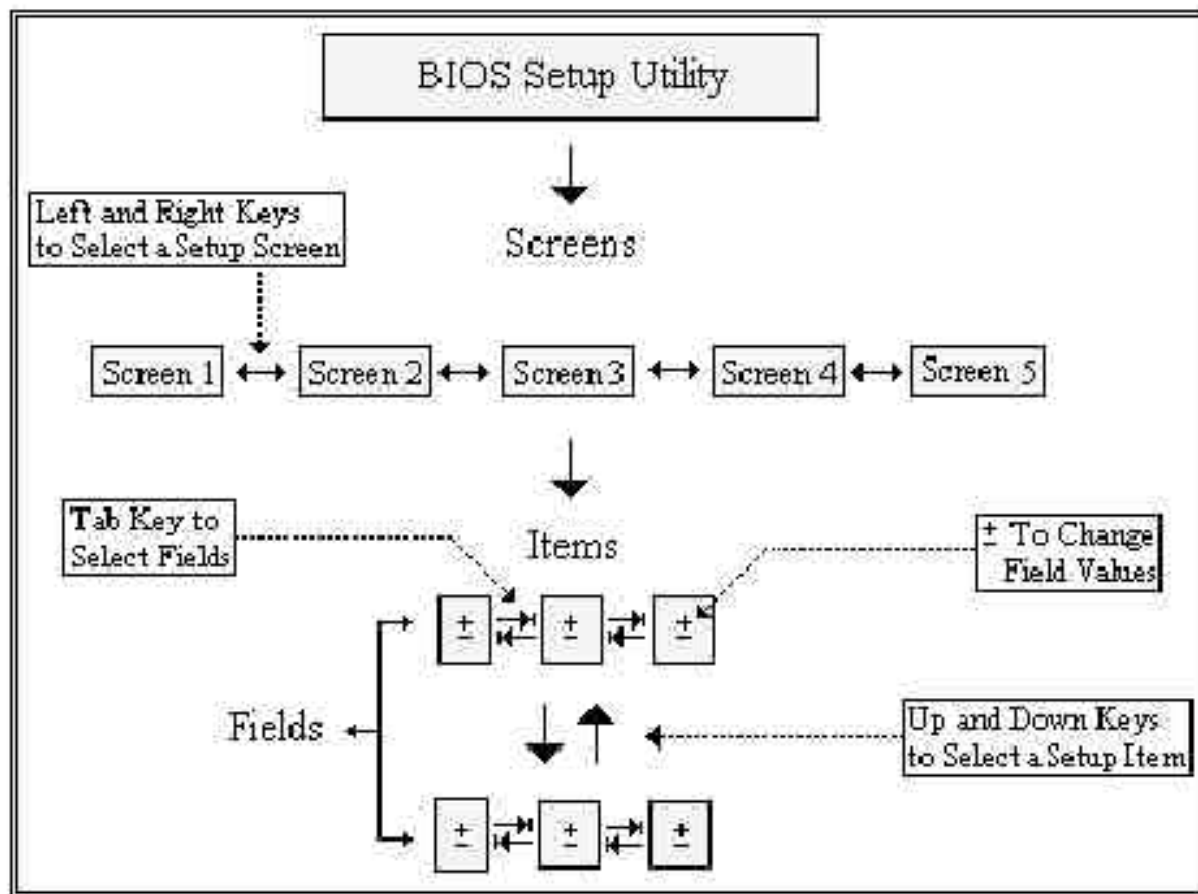

The <F8> key on your keyboard is the Fail-Safe key. It is not displayed on the ezPORT key legend by default. To set the Fail-Safe settings of the BIOS, press the <F8> key on your keyboard. It is located on the upper row of a standard 101 keyboard. The Fail-Safe settings allow the motherboard to boot up with the least amount of options set. This can lessen the probability of conflicting settings.

Hot Key	Description
←→ Left/Right	The <i>Left and Right</i> <Arrow> keys allow you to select an ezPORT setup screen. For example: Main screen, Advanced screen, Chipset screen, and so on.
↑↓ Up/Down	The <i>Up and Down</i> <Arrow> keys allow you to select an ezPORT setup item or sub-screen.
+ - Plus/Minus	The <i>Plus and Minus</i> <Arrow> keys allow you to change the field value of a particular setup item. For example: Date and Time.
Tab	The <Tab> key allows you to select ezPORT setup fields.

Hot Key	Description																												
F1	The <F1> key allows you to display the <i>General Help</i> screen. Press the <F1> key to open the <i>General Help</i> screen. General Help <table><tr><td>↔</td><td>Select Screen</td><td>↓↑</td><td>Select Item</td></tr><tr><td>+ -</td><td>Change Screen</td><td>Enter</td><td>Go to Sub Screen</td></tr><tr><td>PGDN</td><td>Next Page</td><td>PGUP</td><td>Previous Page</td></tr><tr><td>Home</td><td>Go to Top of the Screen</td><td>End</td><td>Go to Bottom of Screen</td></tr><tr><td>F2/F3</td><td>Change Colors</td><td>F7</td><td>Discard Changes</td></tr><tr><td>F8</td><td>Load Failsafe Defaults</td><td>F9</td><td>Load Optimal Defaults</td></tr><tr><td>F10</td><td>Save and Exit</td><td>ESC</td><td>Exit</td></tr></table> [Ok]	↔	Select Screen	↓↑	Select Item	+ -	Change Screen	Enter	Go to Sub Screen	PGDN	Next Page	PGUP	Previous Page	Home	Go to Top of the Screen	End	Go to Bottom of Screen	F2/F3	Change Colors	F7	Discard Changes	F8	Load Failsafe Defaults	F9	Load Optimal Defaults	F10	Save and Exit	ESC	Exit
↔	Select Screen	↓↑	Select Item																										
+ -	Change Screen	Enter	Go to Sub Screen																										
PGDN	Next Page	PGUP	Previous Page																										
Home	Go to Top of the Screen	End	Go to Bottom of Screen																										
F2/F3	Change Colors	F7	Discard Changes																										
F8	Load Failsafe Defaults	F9	Load Optimal Defaults																										
F10	Save and Exit	ESC	Exit																										
F10	The <F10> key allows you to save any changes you have made and exit ezPORT Setup. Press the <F10> key to save your changes. The following screen will appear: Save configuration changes and exit now? [Ok] [Cancel] Press the <Enter> key to save the configuration and exit. You can also use the <Arrow> key to select <i>Cancel</i> and then press the <Enter> key to abort this function and return to the previous screen.																												
ESC	The <Esc> key allows you to discard any changes you have made and exit the ezPORT Setup. Press the <Esc> key to exit the ezPORT setup without saving your changes. The following screen will appear: Discard changes and exit setup now? [Ok] [Cancel] Press the <Enter> key to discard changes and exit. You can also use the <Arrow> key to select <i>Cancel</i> and then press the <Enter> key to abort this function and return to the previous screen.																												
Enter	The <Enter> key allows you to display or change the setup option listed for a particular setup item. The <Enter> key can also allow you to display the setup sub- screens.																												

Main Setup

When you first enter the ezPORT Setup Utility, you will enter the Main setup screen. You can always return to the Main setup screen by selecting the *Main* tab. There are two Main Setup options.

System Time/System Date

Use this option to change the system time and date. Highlight *System Time* or *System Date* using the <Arrow> keys. Enter new values through the keyboard. Press the <Tab> key or the <Arrow> keys to move between fields. The date must be entered in MM/DD/YY format. The time is entered in HH:MM:SS format.

Note: The time is in 24-hour format. For example, 5:30 A.M. appears as 05:30:00, and 5:30 P.M. as 17:30:00.

Advanced BIOS Setup

Select the *Advanced* tab from the ezPORT setup screen to enter the Advanced BIOS Setup screen. You can select any of the items in the left frame of the screen, such as SuperIO Configuration, to go to the sub menu for that item. You can display an Advanced BIOS Setup option by highlighting it using the <Arrow> keys. All Advanced BIOS Setup options are described in this section.

CPU CONFIGURATION SCREEN

Information about the CPU.

Intel SpeedStep Technology

You can select the behavior of the SpeedStep feature prior to the OS boot. The Optimal and Fail-Safe default setting is *Disabled*.

Maximum speed.

Minimum speed.

Auto.

Disabled.

IDE CONFIGURATION SCREEN

IDE Configuration Settings

You can use this screen to select options for the IDE Configuration Settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option. A description of the selected item appears on the right side of the screen.

Onboard PCI IDE Controller

This item specifies the IDE channels used by the onboard PCI IDE controller. The settings are *Disabled*, *Primary*, *Secondary*, or *Both*. The Optimal and Fail-Safe default setting is *Both*.

Disabled Set this value to prevent the computer system from using the onboard IDE controller.

Primary Set this value to allow the computer system to detect only the Primary IDE channel. This includes both the Primary Master and the Primary Slave.

Secondary Set this value to allow the computer system to detect only the Secondary IDE channel. This includes both the Secondary Master and the Secondary Slave.

Both Set this value to allow the computer system to detect the Primary and Secondary IDE channels.

This includes both the Primary Master, Primary Slave, Secondary Master, and Secondary Slave. This is the default setting.

Onboard PCI IDE Operate Mode

Native mode is the preferred mode for modern OSes like Windows 2000 and Windows XP. OSes without support for Native mode must use Legacy Mode. The Optimal and Fail-Safe default setting is *Legacy Mode*.

Legacy Mode Set this value to allow the hard disk drive to be used on IRQs 14 and 15 and I/O and memory maps following legacy IDE standards

Native Mode Set this mode for the PCI IDE controller to be treated as any other PCI device (Windows 2000 and XP only).

Primary IDE Master, Primary IDE Slave, Secondary IDE Master, Secondary IDE Slave

Select one of the hard disk drives to configure it. Press <Enter> to access the sub menu. The options on the sub menu are described in the following sections.

Hard disk drive Write Protect

Set this option to protect the hard disk drive from being overwritten. The Optimal and Fail-Safe default setting is *Disabled*.

Disabled Set this value to allow the hard disk drive to be used normally. Read, write, and erase functions can be performed to the hard disk drive. This is the default setting.

Enabled Set this value to prevent the hard disk drive from being erased.

IDE Detect Time Out (Seconds)

Set this option to stop the AMIBIOS from searching for IDE devices within the specified number of seconds. Basically, this allows you to fine-tune the settings to allow for faster boot times. Adjust this setting until a suitable timing that can detect all IDE disk drives attached is found.

The Optimal and Fail-Safe default setting is 35.

0 This value is the best setting to use if the onboard IDE controllers are set to a specific IDE disk drive in the AMIBIOS.

5 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in five seconds. A large majority of ultra ATA hard disk drives can be detected well within five seconds.

10 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in 10 seconds.

15 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in 15 seconds.

20 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in 20 seconds.

25 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in 25 seconds.

30 Set this value to stop the AMIBIOS from searching the IDE bus for IDE disk drives in 30 seconds.

35 35 is the default value. It is the recommended setting when all IDE connectors are set to *AUTO* in the AMIBIOS setting.

Note: Different IDE disk drives take longer for the BIOS to locate than others do.

ATA (PI) 80 pin Cable Detection

Set this option to select the method used to detect the ATA (PI) 80 pin cable. The Optimal and Fail-Safe setting is *Host & Device*.

Host & Device Set this value to use both the motherboard onboard IDE controller and IDE disk drive to detect the type of IDE cable used. This is the default setting.

Host Set this value to use motherboard onboard IDE controller to detect the type of IDE cable used.

Device Set this value to use IDE disk drive to detect the type of IDE cable used.

The use of an 80-conductor ATA cable is mandatory for running Ultra ATA/66 and Ultra ATA/100 IDE hard disk drives. The standard 40-conductor ATA cable cannot handle the higher speeds.

80-conductor ATA cable is plug compatible with the standard 40-conductor ATA cable. Because of this, the system must determine the presence of the correct cable. This detection is achieved by having a break in one of the lines on the 80-conductor ATA cable that is normally an unbroken connection in the standard 40-conductor ATA cable. It is this break that is used to make this determination. The AMIBIOS can instruct the drive to run at the correct speed for the cable type detected.

PRIMARY AND SECONDARY IDE MASTER AND SLAVE SUB MENU

Primary and Secondary IDE Master and Slave Settings

From the IDE Configuration screen, press <Enter> to access the sub menu for the primary and secondary IDE master and slave drives. Use this screen to select options for the Primary and Secondary IDE drives. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option. The settings are described on the following pages.

Drive Parameters

The “grayed-out” items in the left frame are the IDE disk drive parameters taken from the firmware of the IDE disk drive selected. The drive parameters listed are as follows:

Device Type of device, such as Hard disk drive.

Vendor Manufacturer of the device.

Size The size of the device.

LBA Mode LBA (Logical Block Addressing) is a method of addressing data on a disk drive. Your AMIBIOS is already equipped with 48-bit LBA mode addressing.

Block Mode Block mode boosts IDE drive performance by increasing the amount of data transferred. Only 512 bytes of data can be transferred per interrupt if block mode is not used. Block mode allows transfers of up to 64 KB per interrupt.

PIO Mode IDE PIO mode programs timing cycles between the IDE drive and the programmable IDE controller. As the PIO mode increases, the cycle time decreases.

Async DMA This indicates the highest Asynchronous DMA Mode that is supported.

Ultra DMA This indicates the highest Synchronous DMA Mode that is supported.

S.M.A.R.T. Self-Monitoring Analysis and Reporting Technology protocol used by IDE drives of some manufacturers to predict drive failures.

Type

This option sets the type of device that the AMIBIOS attempts to boot from after the Power-On Self-Test (POST) has completed. The Optimal and Fail-Safe default setting is *Auto*.

Not Installed Set this value to prevent the BIOS from searching for an IDE disk drive on the specified channel.

Auto Set this value to allow the BIOS auto detect the IDE disk drive type attached to the specified channel. This setting should be used if an IDE hard disk drive is attached to the specified channel. This is the default setting.

CD\DVD This option specifies that an IDE CD-ROM drive is attached to the specified IDE channel. The BIOS will not attempt to search for other types of IDE disk drives on the specified channel.

ARMD This option specifies an ATAPI Removable Media Device.

This includes, but is not limited to:

- ZIP
- LS-120
- MO

LBA/Large Mode

LBA (Logical Block Addressing) is a method of addressing data on a disk drive. The Optimal and Fail-Safe default setting is *Auto*.

Note: Your AMIBIOS is equipped with 48-bit LBA mode addressing for drive capacities over 137 GB.

Disabled Set this value to prevent the BIOS from using Large Block Addressing mode control on the specified channel.

Auto Set this value to allow the BIOS to auto detect the Large Block Addressing mode control on the specified channel. This is the default setting.

Block (Multi-Sector Transfer)

This option sets the block mode multi sector transfers option. The Optimal and Fail-Safe default setting is *Auto*.

Disabled Set this value to prevent the BIOS from using Multi-Sector Transfer on the specified channel. The data to and from the device will occur one sector at a time.

Auto Set this value to allow the BIOS to auto detect device support for Multi-Sector Transfers on the specified channel. If supported, Set this value to allow the BIOS to auto detect the number of sectors per block for transfer from the hard disk drive to the memory. The data transfer to and from the device will occur multiple sectors at a time. This is the default setting.

PIO Mode

IDE PIO (Programmable I/O) mode programs timing cycles between the IDE drive and the programmable IDE controller. As the PIO mode increases, the cycle time decreases. The Optimal and Fail-Safe default setting is *Auto*.

Auto Set this value to allow the BIOS to auto detect the PIO mode. Use this value if the IDE disk drive support cannot be determined. This is the default setting.

0 Set this value to allow the BIOS to use PIO mode 0. It has a data transfer rate of 3.3 MBs.

1 Set this value to allow the BIOS to use PIO mode 1. It has a data transfer rate of 5.2 MBs.

2 Set this value to allow the BIOS to use PIO mode 2. It has a data transfer rate of 8.3 MBs.

3 Set this value to allow the BIOS to use PIO mode 3. It has a data transfer rate of 11.1 MBs.

4 Set this value to allow the BIOS to use PIO mode 4. It has a data transfer rate of 16.6 MBs. This setting generally works with all hard disk drives manufactured after 1999. For other disk drive, such as IDE CD-ROM drives, check the specifications of the drive.

DMA Mode

This setting allows you to adjust the DMA mode options. The Optimal and Fail-Safe default setting is *Auto*.

Auto Set this value to allow the BIOS to auto detect the DMA mode. Use this value if the IDE disk drive support cannot be determined. This is the default setting.

SWDMA0 Set this value to allow the BIOS to use Single Word DMA mode 0. It has a data transfer rate of 2.1 MBs.

SWDMA1 Set this value to allow the BIOS to use Single Word DMA mode 1. It has a data transfer rate of 4.2 MBs.

SWDMA2 Set this value to allow the BIOS to use Single Word DMA mode 2. It has a data transfer rate of 8.3 MBs.

MWDMA0 Set this value to allow the BIOS to use Multi Word DMA mode 0. It has a data transfer rate of 4.2 MBs.

MWDMA1 Set this value to allow the BIOS to use Multi Word DMA mode 1. It has a data transfer rate of 13.3 MBs.

MWDMA2 Set this value to allow the BIOS to use Multi Word DMA mode 2. It has a data transfer rate of 16.6 MBs.

UDMA0 Set this value to allow the BIOS to use Ultra DMA mode 0. It has a data transfer rate of 16.6 MBs. It has the same transfer rate as PIO mode 4 and Multi Word DMA mode 2.

UDMA1 Set this value to allow the BIOS to use Ultra DMA mode 1. It has a data transfer rate of 25 MBs.

UDMA2 Set this value to allow the BIOS to use Ultra DMA mode 2. It has a data transfer rate of 33.3 MBs.

UDMA3 Set this value to allow the BIOS to use Ultra DMA mode 3. It has a data transfer rate of 44.4 MBs. To use this mode, it is required that an 80-conductor ATA cable is used.

UDMA4 Set this value to allow the BIOS to use Ultra DMA mode 4. It has a data transfer rate of 66.6 MBs. To use this mode, it is required that an 80-conductor ATA cable is used.

UDMA5 Set this value to allow the BIOS to use Ultra DMA mode 5. It has a data transfer rate of 99.9 MBs. To use this mode, it is required that an 80-conductor ATA cable is used.

S.M.A.R.T. for Hard disk drives

Self-Monitoring Analysis and Reporting Technology (SMART) feature can help predict impending drive failures. The Optimal and Fail-Safe default setting is *Auto*.

Auto Set this value to allow the BIOS to auto detect hard disk drive support. Use this setting if the IDE disk drive support cannot be determined. This is the default setting.

Disabled Set this value to prevent the BIOS from using the SMART feature.

Enabled Set this value to allow the BIOS to use the SMART feature on support hard disk drives.

32Bit Data Transfer

This option sets the 32-bit data transfer option. The Optimal and Fail-Safe default setting is *Enabled*.

Disabled Set this value to prevent the BIOS from using 32-bit data transfers.

Enabled Set this value to allow the BIOS to use 32-bit data transfers on support hard disk drives. This is the default setting.

ARMD Emulation Type

ATAPI Removable Media Device (ARMD) is a device that uses removable media, such as the LS120, MO (Magneto-Optical), or Iomega Zip drives. If you want to boot up from media on an ARMD, it is required that you emulate boot up from a floppy or hard disk drive. This is especially necessary when trying to boot to DOS. You can select the type of emulation used if you are booting from such a device. The Optimal and Fail-Safe default setting is *Auto*.

Auto Set this value to allow the BIOS to automatically set the emulation used by ARMD. This is the default setting.

Floppy Set this value for ARMD to emulate a floppy drive during boot up.

Hard disk drive Set this value for ARMD to emulate a hard disk drive during boot up.

FLOPPY CONFIGURATION SCREEN

Floppy Configuration Settings

You can use this screen to specify options for the Floppy Configuration Settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

Floppy Drive A: and B:

Move the cursor to these fields via up and down <arrow> keys. Select the floppy type. The Optimal setting for floppy drive A: is *1.44 MB 3½"*. The Fail-Safe setting for floppy drive A: is *1.44 MB 3½"*. The Optimal setting for floppy drive B: is *Disabled*. The Fail- Safe setting for floppy drive B: is *Disabled*.

Disabled Set this value to prevent the use of the selected floppy disk drive channel. This option should be set if no floppy disk drive is installed on the specified channel. This is the default setting for *Floppy Drive B*.

360 KB 5 ¼ " Set this value if the floppy disk drive attached to the corresponding channel is a 360 KB 5¼ " floppy disk drive.

1.2 MB 5 ¼ " Set this value if the floppy disk drive attached to the corresponding channel is a 1.2 MB 5¼ " floppy disk drive.

720 KB 3 ½ ” Set this value if the floppy disk drive attached to the corresponding channel is a 720 KB 3½ “ floppy disk drive.

1.44 MB 3 ½ ” Set this value if the floppy disk drive attached to the corresponding channel is a 1.44 MB 3½ “ floppy disk drive. This is the default setting for *Floppy Drive A*.

2.88 MB 3 ½ ”

SUPER IO CONFIGURATION SCREEN

SuperIO Configuration Screen

You can use this screen to select options for the Super I/O settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

OnBoard Floppy Controller

Set this option to Enabled to enable the floppy drive controller on the motherboard. The settings are Enabled and Disabled. The default setting is *Enabled*.

Floppy Disk Control Signals

Internal FDC

Parallel LPT

The Optimal and the Fail-safe default setting is Internal FDC.

Serial Port1 Address

This option specifies the base I/O port address of serial port 1. The Optimal setting is 3F8. The Fail-Safe default setting is 3F8.

Disabled Set this value to prevent the serial port from accessing any system resources. When this option is set to *Disabled*, the serial port physically becomes unavailable.

3F8 Set this value to allow the serial port to use 3F8 as its I/O port address. This is the default setting. The majority of serial port 1 or COM1 ports on computer systems use I/O Port 3F8 as the standard setting. The most common serial device connected to this port is a mouse. If the system will not use a serial device, it is best to set this port to *Disabled*.

2F8 Set this value to allow the serial port to use 2F8 as its I/O port address. If the system will not use a serial device, it is best to set this port to *Disabled*.

3E8 Set this value to allow the serial port to use 3E8 as its I/O port address. If the system will not use a serial device, it is best to set this port to *Disabled*.

2E8 Set this value to allow the serial port to use 2E8 as its I/O port address. If the system will not use a serial device, it is best to set this port to *Disabled*.

Serial Port1 IRQ

This option specifies the IRQ of serial port 1. The Optimal setting is 4. This option is not available if serial port1 is disabled.

3, 4, 10 or 11.

RS-485 Control for SP1

Enables or disables the control of the transceiver of the optional RS-485. In a half-duplex RS-485 serial communication line, the function of the transceiver (transmit or receive) must be controlled over time. The settings are Enabled and Disabled. The default setting is *Disabled*.

Auto Direction Control Sel

Enables or disables the control of the transceiver of the optional RS-485 using an auto direction mechanism of the SuperIO. The settings are FC on and FC off. The default setting is FC off.

Signal Select SP1

Selects the signal to control the RS-485 direction if auto direction control is not being used

The settings are **nDTR** and **nRTS**. The default setting is **nDTR**.

Polarity SP1

Selects the polarity of the signal to control the RS-485 direction if auto direction control is not being used

The settings are **Low** and **High**. The default setting is **High**.

Serial Port2 Address

This option specifies the base I/O port address of serial port 2. The Optimal setting is 2F8. The Fail-Safe default setting is 2F8.

Disabled, 3F8, 2F8, 3E8, 2E8

Serial Port2 IRQ

This option specifies the IRQ of serial port 2. The Optimal setting is 3. This option is not available if serial port2 is disabled.

3, 4, 10 or 11.

Serial Port2 Mode

This option allows installation of an Infra-red device by the Serial Port. The settings are Normal (*default*), IRDA and ASK IR.

Infra-Red Transmission Mode

The settings are Full Duplex (*default*) or Half Duplex.

COMB Receiver Polarity [High]

COMB Xmitter Polarity [Low]

Sets polarity for IR modes.

RS-485 Control For SP2

The settings are Disabled and Enabled.

The Optimal and Fail-safe default setting is Disabled.

Auto direction Control Sel [FC off]

Signal Select SP2 [nDTR]

Polarity SP2 [High]

Serial Port3 Address

This option specifies the base I/O port address of serial port 3. The default setting is *Disabled*.

Disabled, 3F8, 2F8, 3E8, 2E8, 338, 238

Serial Port3 IRQ

This option specifies the IRQ of serial port 3. This option is not available if serial port 3 is disabled.

3, 4, 10 or 11.

Serial Port4 Address

This option specifies the base I/O port address of serial port 4. The default setting is *Disabled*.

Disabled, 3F8, 2F8, 3E8, 2E8, 338, 238

Serial Port4 IRQ

This option specifies the IRQ of serial port 4. This option is not available if serial port 4 is disabled.

3, 4, 10 or 11.

Serial Port5 Address

This option specifies the base I/O port address of serial port 5. The default setting is *Disabled*.

Disabled, 3E8, 2E8, 338, 238, 228, 220

Serial Port5 IRQ

This option specifies the IRQ of serial port 5. This option is not available if serial port5 is disabled.

3, 4, 5, 6, 7, 10, 11.

Serial Port6 Address

This option specifies the base I/O port address of serial port 6. The default setting is *Disabled*.

Disabled, 3E8, 2E8, 338, 238, 228, 220

Serial Port6 IRQ

This option specifies the IRQ of serial port 6. This option is not available if serial port6 is disabled.

3, 4, 5, 6, 7, 10, 11.

Parallel Port Address

This option specifies the I/O address used by the parallel port. The Optimal setting is *378*. The Fail-Safe setting is *Disabled*.

Disabled Set this value to prevent the parallel port from accessing any system resources. When the value of this option is set to *Disabled*, the printer port becomes unavailable.

378 Set this value to allow the parallel port to use 378 as its I/O port address. This is the default setting. The majority of parallel ports on computer systems use IRQ7 and I/O Port 378H as the standard setting.

278 Set this value to allow the parallel port to use 278 as its I/O port address.

3BC Set this value to allow the parallel port to use 3BC as its I/O port address.

Parallel Port Mode

This option specifies the parallel port mode. The Optimal setting is *Normal*. The Fail- Safe setting is *Disabled*.

Normal Set this value to allow the standard parallel port mode to be used. This is the default setting.

SPP(Bi-Dir) Set this value to allow data to be sent to and received from the parallel port.

EPP+SPP The parallel port can be used with devices that adhere to the Enhanced Parallel Port (EPP) specification. EPP uses the existing parallel port signals to provide asymmetric bi-directional data transfer driven by the host device.

ECP The parallel port can be used with devices that adhere to the Extended Capabilities Port (ECP) specification. ECP uses the DMA protocol to achieve data transfer rates up to 2.5 Megabits per second. ECP provides symmetric bi-directional communication.

ECP+EPP

Parallel Port IRQ

This option specifies the IRQ used by the parallel port. The Optimal and Fail-Safe default setting is *7*.

5 Set this value to allow the serial port to use Interrupt 5.

7 Set this value to allow the serial port to use Interrupt 7. This is the default setting. The majority of parallel ports on computer systems use IRQ7 and I/O Port 378h as the standard setting.

HARDWARE HEALTH CONFIGURATION SCREEN

Hardware Health Configuration Screen

Shows information about temperatures and voltages. The function can be enabled or disabled.

H/W Health Function [Enabled]

Disabled

Enabled

System Fan Configuration

Several options to control the system Fan operation.

System Fan Mode Setting [Fan Always On Full]

Auto Fan Mode

Fan Always On Full

Fan disabled Mode

Fan Manually Mode

System Fan Ramp Rate [4.85 Hz]

9.62 Hz

14.49 Hz

24.39 Hz

38.46 Hz

55.56 Hz

100 Hz

200 Hz

CPU Fan PWM Mode Setting [Fan Always On Full]

Auto Fan Mode
Fan Always On Full
Fan disabled Mode
Fan Manually Mode

CPU Fan PWM Ramp Rate [4.85 Hz]

9.62 Hz
14.49 Hz
24.39 Hz
38.46 Hz
55.56 Hz
100 Hz
200 Hz

The following parameters are displayed:

CPU and System Temperatures
CPU and System Fan Speed

System voltages including CPU Voltage

ACPI CONFIGURATION SCREEN

ACPI Configuration Screen

You can use this screen to select options for the ACPI settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

Advanced ACPI Configuration

You can use this screen to select options for the ACPI Advanced Configuration Settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option. A description of the selected item appears on the right side of the screen.

ACPI Version Feature [ACPI v1.0]

Set this value to the desired ACPI specification:

ACPI v1.0, ACPI v.2.0, ACPI v.3.0

ACPI APIC support

Include ACPI APIC pointer to RSDT pointer list.

AMI OEM Table

Set this value to allow the ACPI BIOS to add a pointer to an OEMB table in the Root System Description Table (RSDT) table.

Disabled This option disables adding an OEMB table.

Enabled This option enables adding an OEMB table. This is the default setting.

Note: OEMB table is used to pass POST data to the AML code during ACPI O/S operations.

RSDT

RSDT is the main ACPI table. It has no fixed place in memory. During the boot up process, the BIOS locates a pointer to the table during the memory scan. A Root System Descriptor Pointer (RSDP) is located in low memory space of the system. It provides the physical address of the RSDT. The RSDT itself is identified in memory because it starts with the signature "RSDT." Following the signature is an array of pointers that tell the operating system the location of other description tables that provide it with the information it needs about the standards defined on the current system and individual devices.

AML

ACPI Machine Language (AML) is a binary code format that the operating system's ACPI AML interpreter parses to discover the machine's properties. On boot up the BIOS startup code copies it into system memory, where it can be interpreted by the operating system's ACPI AML interpreter.

Headless Mode

This option is used to update the ACPI FACP table to indicate headless operations.

Disabled This option disables updating the ACPI FACP table to indicate headless operation. This is the default setting.

Enabled This option enables updating the ACPI FACP table to indicate headless operation.

Chipset ACPI Configuration

You can use this screen to select options for the Chipset ACPI Configuration Settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option. A description of the selected item appears on the right side of the screen.

APIC ACPI SCI IRQ

The Optimal and Fail-Safe default setting is *Disabled*.

USB Device Wakeup From S3 [Disable]

EVENT LOG CONFIGURATION SCREEN

EVENT LOG Configuration Screen

You can use this screen to select options for the Event Log settings. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

View Event Log

Mark all events as read

Clear Event Log

PCI Error Logging

Enables or disables PCI Error logging. The Optimal and Fail-Safe default setting is *Disabled*.

Enabled.

Disabled.

Smbios Configuration

Smbios Smi Support [Enable]

USB CONFIGURATION SCREEN

USB Configuration Screen

You can use this screen to select options for the USB Configuration. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

USB Function

Number of USB ports enabled. The Optimal and Fail-Safe default setting is 6 *USB Ports*

2, 4, 6

Legacy USB Support

Legacy USB Support refers to the USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard will not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB drivers loaded on the system. Set this value to enable or disable the Legacy USB Support. The Optimal and Fail-Safe default setting is *Auto*.

Disabled Set this value to prevent the use of any USB device in DOS or during system boot.

Enabled Set this value to allow the use of USB devices during boot and while using DOS.

Auto This option auto detects USB Keyboards or Mice and if found, allows them to be utilized during boot and while using DOS.

USB 2.0 Controller Mode[Full Speed] (default)

Set this option to HiSpeed for 480Mbps or FullSpeed for 12Mbps.

BIOS EHCI Hand-off

Work around for OSES without hand-off support. The EHCI ownership should be claimed by the EHCI driver. The Optimal and Fail-Safe default setting is *Enabled*.

USB Mass Storage Device Configuration Screen

You can use this screen to select options for the USB Mass Storage Devices Configuration. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

USB Mass Storage Device Delay

Set the value for the number of seconds that POST waits for the USB mass storage device after start unit command is issued. The options are 10, 20, 30 and 40 seconds.

Emulation Type

Set the emulation type to Auto, Floppy, Forced FDD, Hard Disk or CDROM. If Auto, USB devices less than 530MB will be emulated as floppy and remaining devices as Hard Drive. Forced FDD option can be used to force a formatted HDD device to boot as FDD (ex. ZIP Drive).

PCI/PnP Setup

Select the *PCI/PnP* tab from the ezPORT setup screen to enter the Plug and Play BIOS Setup screen. You can display a Plug and Play BIOS Setup option by highlighting it using the <Arrow> keys.

Clear NVRAM

Set this value to allow the system to clear the NVRAM. The Optimal and Fail-Safe default setting is *No*.

Plug and Play O/S

Set this value to allow the system to modify the settings for Plug and Play operating system support. The Optimal and Fail-Safe default setting is *Yes*.

No The *No* setting is for operating systems that do not meet the Plug and Play specifications. It allows the BIOS to configure all the devices in the system.

Yes The *Yes* setting allows the operating system to change the interrupt, I/O, and DMA settings. Set this option if the system is running Plug and Play aware operating systems.

PCI Latency Timer

Set this value to allow the PCI Latency Timer to be adjusted. This option sets the latency of all PCI devices on the PCI bus. The Optimal and Fail-Safe default setting is *64*.

32 This option sets the PCI latency to 32 PCI clock cycles.

64 This option sets the PCI latency to 64 PCI clock cycles. This is the default setting.

96 This option sets the PCI latency to 96 PCI clock cycles.

128 This option sets the PCI latency to 128 PCI clock cycles.

160 This option sets the PCI latency to 160 PCI clock cycles.

192 This option sets the PCI latency to 192 PCI clock cycles.

224 This option sets the PCI latency to 224 PCI clock cycles.

248 This option sets the PCI latency to 248 PCI clock cycles.

Allocate IRQ to VGA

Set this value to allow or restrict the system from giving the VGA adapter card an interrupt address. The Optimal and Fail-Safe default setting is *Yes*.

Yes Set this value to allow the allocation of an IRQ to a VGA adapter card that uses the PCI local bus. This is the default setting.

No Set this value to prevent the allocation of an IRQ to a VGA adapter card that uses the PCI local bus.

Palette Snooping

Set this value to allow the system to modify the Palette Snooping settings. The Optimal and Fail-Safe default setting is *Disabled*.

Disabled This is the default setting and should not be changed unless the VGA card manufacturer requires Palette Snooping to be Enabled.

Enabled This setting informs the PCI devices that an ISA based Graphics device is installed in the system. It does this so the ISA based Graphics card will function correctly. This does not necessarily indicate a physical ISA adapter card. The graphics chipset can be mounted on a PCI card. Always check with your adapter card's manuals first, before modifying the default settings in the BIOS.

PCI IDE BusMaster

Set this value to allow or prevent the use of PCI IDE bus mastering. The Optimal and Fail-Safe default setting is *Disabled*.

Disabled Set this value to prevent PCI bus mastering. This is the default setting.

Enabled This option specifies that the IDE controller on the PCI local bus has mastering capabilities.

OffBoard PCI/ISA IDE Card

Set this value to allow the OffBoard PCI/ISA IDE Card to be selected. The Optimal and Fail-Safe default setting is *Auto*.

Auto This setting will auto select the location of an OffBoard PCI IDE adapter card. This is the default setting.

PCI Slot1 This setting will select PCI Slot 1 as the location of the OffBoard PCI IDE adapter card. Use this setting only if there is an IDE adapter card installed in PCI Slot 1.

PCI Slot2 This setting will select PCI Slot 2 as the location of the OffBoard PCI IDE adapter card. Use this setting only if there is an IDE adapter card installed in PCI Slot 2.

PCI Slot 3

PCI slot 4

PCI slot 5

PCI slot 6

IRQ

Set this value to allow the IRQ settings to be modified. The Optimal and Fail-Safe default setting is *Available*.

IRQ3

IRQ4

IRQ5

IRQ7

IRQ9

IRQ10

IRQ11

IRQ14

IRQ15

Available This setting allows the specified IRQ to be used by a PCI/PnP device. This is the default setting.

Reserved This setting allows the specified IRQ to be used by a legacy ISA device.

DMA

Set this value to allow the DMA setting to be modified. The optimal and Fail-Safe default setting is *Available*.

DMA Channel 0

DMA Channel 1

DMA Channel 3

DMA Channel 5

DMA Channel 6

DMA Channel 7

Available This setting allows the specified DMA to be used by PCI/PnP device. This is the default setting.

Reserved This setting allows the specified DMA to be used by a legacy ISA device.

Reserved Memory Size

Set this value to allow the system to reserve memory that is used by ISA devices. The optimal and Fail-Safe default setting is *Disabled*.

Disabled Set this value to prevent BIOS from reserving memory to ISA devices.

16K Set this value to allow the system to reserve 16K of the system memory to the ISA devices.

32K Set this value to allow the system to reserve 32K of the system memory to the ISA devices.

64K Set this value to allow the system to reserve 64K of the system memory to the ISA devices.

Reserved Memory Address

Set this value to the base address of memory block to reserve for legacy ISA devices. The optimal and Fail-Safe default setting is *C8000*.

C0000

C4000

C8000

CC000

D0000

D4000

D8000

DC000

Boot Setup

Select the *Boot* tab from the ezPORT setup screen to enter the Boot BIOS Setup screen. You can select any of the items in the left frame of the screen, such as Boot Device Priority, to go to the sub menu for that item. You can display a Boot BIOS Setup option by highlighting it using the <Arrow> keys.

BOOT SETTINGS CONFIGURATION SCREEN

Boot Settings Configuration

Use this screen to select options for the Boot Settings Configuration. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

Quick Boot

The Optimal and Fail-Safe default setting is *Enabled*.

Disabled Set this value to allow the BIOS to perform all POST tests.

Enabled Set this value to allow the BIOS to skip certain POST tests to boot faster.

Quiet Boot

Set this value to allow the boot up screen options to be modified between POST messages or OEM logo. The Optimal and Fail-Safe default setting is *Disabled*.

Disabled Set this value to allow the computer system to display the POST messages.

Enabled Set this value to allow the computer system to display the OEM logo. This is the default setting.

(AddOn) ROM Display Mode

Set this option to display add-on ROM (read-only memory) messages. The Optimal and Fail-Safe default setting is *Force BIOS*. An example of this is a SCSI BIOS or VGA BIOS.

Force BIOS Set this value to allow the computer system to force a third party BIOS to display during system boot. This is the default setting.

Keep Current Set this value to allow the computer system to display the ezPORT information during system boot.

(Bootup) Num-Lock

Set this value to allow the Number Lock setting to be modified during boot up. The Optimal and Fail-Safe default setting is *On*.

Off This option does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard will light up when the Number Lock is engaged.

On Set this value to allow the Number Lock on the keyboard to be enabled automatically when the computer system is boot up. This allows the immediate use of 10-keys numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard will be lit.

PS/2 Mouse Support

Set this value to allow the PS/2 mouse support to be adjusted. The Optimal and Fail-Safe default setting is *Auto*.

Disabled This option will prevent the PS/2 mouse port from using system resources and will prevent the port from being active. Use this setting if installing a serial mouse.

Enabled Set this value to allow the system to use a PS/2 mouse. This is the default setting.

Auto

Wait for 'F1' If Error

Set this value to allow the Wait for 'F1' Error setting to be modified. The Optimal and Fail-Safe default setting is *Enabled*.

Disabled This prevents the ezPORT to wait on an error for user intervention. This setting should be used if there is a known reason for a BIOS error to appear. An example would be a system administrator must remote boot the system. The computer system does not have a keyboard currently attached. If this setting is set, the system will continue to boot up in to the operating system. If 'F1' is enabled, the system will wait until the BIOS setup is entered.

Enabled Set this value to allow the system BIOS to wait for any error. If an error is detected, pressing <F1> will enter Setup and the BIOS setting can be adjusted to fix the problem. This normally happens when upgrading the hardware and not setting the BIOS to recognize it. This is the default setting.

Hit 'DEL' Message Display

Set this value to allow the Hit "DEL" to enter Setup Message Display to be modified. The Optimal and Fail-Safe default setting is *Enabled*.

Disabled This prevents the ezPORT to display

Hit Del to enter Setup

during memory initialization. If Quiet Boot is enabled, the Hit 'DEL' message will not display.

Enabled This allows the ezPORT to display

Hit Del to enter Setup

during memory initialization. This is the default setting.

Interrupt 19 Capture[Disabled] (Default)

Set this value to allow option ROMs such as network controllers to trap BIOS interrupt 19.

Disabled The BIOS prevents option ROMs from trapping interrupt 19.

Enabled The BIOS allows option ROMs to trap interrupt 19.

BOOT DEVICE PRIORITY

Boot Device Priority

Use this screen to specify the order in which the system checks for the device to boot from. To access this screen, select Boot Device Priority on the Boot Setup screen and press <Enter>.

1st Boot Device

2nd Boot Device

3rd Boot Device

Set the boot device options to determine the sequence in which the computer checks which device to boot from. The settings are *Removable Dev.*, *Hard Drive*, or *ATAPI CDROM*. The Optimal and Fail-Safe settings are:

- 1st boot device – 1st FLOPPY DRIVE
- 2nd boot device – CD/DVD
- 3rd boot device – HDD

To change the boot order, select a boot category type such as Hard disk drives, Removable media, or ATAPI CD ROM devices from the boot menu. For example, if the 1st boot device is set to Hard disk drives, then BIOS will try to boot to hard disk drives first.

Note: When you select a boot category from the boot menu, a list of devices in that category appears. For example, if the system has three hard disk drives connected, then the list will show all three hard disk drives attached.

HARD DISK DRIVES

Hard disk drives

Use this screen to view the hard disk drives in the system. To access this screen, select Hard disk drives on the Boot Setup screen and press <Enter>.

1st Drive [HD:PM..]

REMOVABLE DRIVES

Removable Devices

Use this screen to view the removable drives attached to the system. To access this screen, select Removable Devices on the Boot Setup screen and press <Enter>.

CD/DVD DRIVES

ATAPI CD-ROM Drives

Use this screen to view the ATAPI CD-ROM drives in the system. To access this screen, select ATAPI CDROM Drives on the Boot Setup screen and press <Enter>.

1st Drive [CD/DVD: PS..]

Security Setup

ezPORT Password Support

Two Levels of Password Protection

ezPORT provides both a Supervisor and a User password. If you use both passwords, the Supervisor password must be set first. The system can be configured so that all users must enter a password every time the system boots or when ezPORT Setup is executed, using either or either the Supervisor password or User password. The Supervisor and User passwords activate two different levels of password security. If you select password support, you are prompted for a one to six character password. Type the password on the keyboard. The password does not appear on the screen when typed. Make sure you write it down. If you forget it, you must drain NVRAM and reconfigure.

Remember the Password

Keep a record of the new password when the password is changed. If you forget the password, you must erase the system configuration information in NVRAM. See (Deleting a Password) for information about erasing system configuration information.

Select Security Setup from the ezPORT Setup main BIOS setup menu. All Security Setup options, such as password protection and virus protection, are described in this section. To access the sub menu for the following items, select the item and press <Enter>:

- Change Supervisor Password
- Change User Password
- Clear User Password

Supervisor Password

Indicates whether a supervisor password has been set. If the password has been installed, *Installed* displays. If not, *Not Installed* displays.

User Password

Indicates whether a user password has been set. If the password has been installed, *Installed* displays. If not, *Not Installed* displays.

Change Supervisor Password

Select this option and press <Enter> to access the sub menu. You can use the sub menu to change the supervisor password.

Change User Password

Select this option and press <Enter> to access the sub menu. You can use the sub menu to change the user password.

Clear User Password

Select this option and press <Enter> to access the sub menu. You can use the sub menu to clear the user password.

Boot Sector Virus Protection

This option is near the bottom of the Security Setup screen. The Optimal and Fail-Safe default setting is *Disabled*

Disabled Set this value to prevent the Boot Sector Virus Protection. This is the default setting.

Enabled Select Enabled to enable boot sector protection. ezPORT displays a warning when any program (or virus) issues a Disk Format command or attempts to write to the boot sector of the hard disk drive. If enabled, the following appears when a write is attempted to the boot sector. You may have to type N several times to prevent the boot sector write.

Boot Sector Write!

Possible VIRUS: Continue (Y/N)? _

The following appears after any attempt to format any cylinder, head, or sector of any hard disk drive via the BIOS INT 13 Hard disk drive Service:

Format!!!

Possible VIRUS: Continue (Y/N)? _

CHANGE SUPERVISOR PASSWORD

Change Supervisor Password

Select Change Supervisor Password from the Security Setup menu and press <Enter>.

Enter New Password:

appears. Type the password and press <Enter>. The screen does not display the characters entered. Retype the password as prompted and press <Enter>. If the password confirmation is incorrect, an error message appears. The password is stored in NVRAM after ezPORT completes.

Change User Password

Select Change User Password from the Security Setup menu and press <Enter>.

Enter New Password:

appears. Type the password and press <Enter>. The screen does not display the characters entered. Retype the password as prompted and press <Enter>. If the password confirmation is incorrect, an error message appears. The password is stored in NVRAM after ezPORT completes.

Clear User Password

Select Clear User Password from the Security Setup menu and press <Enter>.

Clear New Password

[Ok] [Cancel]

appears. Type the password and press <Enter>. The screen does not display the characters entered. Retype the password as prompted and press <Enter>. If the password confirmation is incorrect, an error message appears. The password is stored in NVRAM after ezPORT completes.

Deleting a Password

If you forget the passwords you set up through ezPORT Setup, the only way you can reset the password is to erase the system configuration information where the passwords are stored. System configuration data is stored in CMOS RAM, a type of memory that consumes very little power. You can drain CMOS RAM power by removing the battery or resetting CMOS information using the CMOS erase jumper.

Chipset Setup

Select the *Chipset* tab from the ezPORT setup screen to enter the Chipset BIOS Setup screen. You can select any of the items in the left frame of the screen, such as CPU Configuration, to go to the sub menu for that item. You can display a Chipset BIOS Setup option by highlighting it using the <Arrow> keys. All Chipset BIOS Setup options are described in this section.

NORTH BRIDGE CONFIGURATION

North Bridge Configuration

You can use this screen to select options for the North Bridge Configuration. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

DRAM Frequency

Set this value to the desired DRAM Frequency. The Optimal is *Auto* and Fail-Safe is 200MHz default setting.
200MHz, 266MHz, 333MHz, Auto.

Configure DRAM Timing by SPD

Set this value to disabled, so the desired DRAM parameters can be set or let them be retrieved from the SPD. The Optimal and Fail-Safe default setting is *Enabled*.

Memory Hole

Enables the 15MB – 16MB memory hole. The Optimal and Fail-Safe default setting is *Disabled*.

Initial Graphics Adapter Priority

Set this value to allow the Primary video device to be selected. The Optimal and Fail-Safe default setting is *AGP/Int VGA*.

Internal VGA, (AGP/Int. VGA), AGP/PCI, PCI/AGP, (PCI/Int. VGA)

Internal Graphics Mode Select

Set this value to select the amount of system memory used by the internal graphics device for legacy VESA modes. The Optimal and Fail-Safe default setting is *Enabled, 8MB*.

Disabled This setting will not assign memory for the internal graphics engine.

Enabled, 1MB This setting will enable the internal graphics engine and allocate 1MB of system memory for it.

Enabled, 4MB This setting will enable the internal graphics engine and allocate 4MB of system memory for it.

Enabled, 8MB This setting will enable the internal graphics engine and allocate 8MB of system memory for it. This is the default setting.

Enabled, 16MB This setting will enable the internal graphics engine and allocate 16MB of system memory for it.

Enabled, 32MB This setting will enable the internal graphics engine and allocate 32MB of system memory for it.

Graphic Aperture Size [64MB] (Optimal and Fail-safe setting)

Options: 64MB, 128MB, 256MB

IGD Device 2, Function 1

Enable or Disable the internal graphics device by setting item to the desired value. The Optimal and Fail-Safe default setting is *Enabled*.

Disabled.

Enabled.

Boot Type

Selects the display devices to be enabled during boot.

VBIOS default. Let the Video BIOS decide based on its settings. Default option.

CRT. CRT only.

LFP. LVDS Panel only.

CRT+LFP. CRT and LVDS panel on.

Flat Panel Type

Selects the LVDS panel resolution to be enabled. Default is 1024x768.

640x480LVDS.

800x600LVDS.

1024x768LVDS.

1280x1024LVDS.

1400x1050LVDS.

1600x1200LVDS.

Flat Panel Scaling

Selects the policies for LVDS panel scaling. The CRT and LVDS must have the same resolution.

Auto.

Force Scaling.

Disabled.

SOUTH BRIDGE CONFIGURATION**Intel ICH4 South Bridge Configuration**

You can use this screen to select options for the South Bridge Configuration. Use the up and down <Arrow> keys to select an item. Use the <Plus> and <Minus> keys to change the value of the selected option.

On Board AC97 Audio

Set this option to Enable or Disable the on board Audio AC97 controller. If Audio is enabled, certain OSs will require a driver installation on every boot.

Auto This setting will keep the onboard Audio Controller enabled. This is the default setting.

Disabled This setting will turn off the on board Audio controller.

Primary LAN

Set this option to Enable or Disable the on board primary LAN controller.

Disabled This setting will turn off the on board primary Ethernet controller.

Enabled This setting will keep the onboard Primary Ethernet Controller enabled. This is the default setting.

Secondary LAN

Set this option to Enable or Disable the on board (optional) secondary LAN controller. This option does not appear on boards without the optional secondary LAN controller.

Disabled This setting will turn off the optional on board secondary Ethernet controller.

Enabled This setting will keep the optional onboard secondary Ethernet Controller enabled. This is the default setting.

Restore on A/C Power Loss

Set this value to select how the CPU board will recover from an accidental A/C power failure – Mechanical off G3 State.

Power OFF This setting will keep the CPU board OFF when A/C power is reestablished. To turn the board ON, the power button must be used.

Power ON This setting will force the CPU board to turn ON as soon as A/C power is reestablished. This is the default setting.

Last State This setting will put the CPU board back to its state before the accidental power failure. It requires ACPI enabled and an ACPI capable OS. The board must be normally turned OFF through a controlled S5 (soft OFF/Power button) transition if it is not an accidental power failure.

SATA Control

Set this option to Enable or Disable the on board SATA controller.

Disabled This setting will turn off SATA controller.

Enabled This setting will keep SATA Controller enabled. This is the default setting.

SATA RAID Control

Set this option to Enable or Disable the RAID function of the on board SATA controller.

RAID SATA Controller in RAID mode enabled. This is the default setting.

Non RAID This setting will turn off SATA controller RAID function.

Power Management Setup

Select the *Power* tab from the ezPORT setup screen to enter the Power BIOS Setup screen. You can display a Power BIOS Setup option by highlighting it using the <Arrow> keys. All Power BIOS Setup options are described in this section.

Power Management/APM

Set this option to Enable or Disable the SMI based power management and APM support.

Enabled This is the default setting.

Disabled

Power Savings Under AC [Disabled]

Disabled

Enabled

Power Saving Level [Disabled]

Disabled

Minimum

Medium

Maximum

Customized

USB Controller Resume [Enabled]

Disabled

Enabled

PME Resume [Disabled]

Disabled

Enabled

Power Button Mode

This option specifies how the power button mounted externally on the computer chassis is used. The settings are: On/Off and suspend. The default setting is On/Off.

On/Off This is the default setting.

Suspend

Exit Menu

Select the *Exit* tab from the ezPORT setup screen to enter the Exit BIOS Setup screen. You can display an Exit BIOS Setup option by highlighting it using the <Arrow> keys. All Exit BIOS Setup options are described in this section.

Exit Saving Changes

When you have completed the system configuration changes, select this option to leave ezPORT Setup and reboot the computer so the new system configuration parameters can take effect. Select Exit Saving Changes from the Exit menu and press <Enter>.

Save Configuration Changes and Exit Now?

[Ok] [Cancel]

appears in the window. Select Ok to save changes and exit.

Exit Discarding Changes

Select this option to quit ezPORT Setup without making any permanent changes to the system configuration. Select Exit Discarding Changes from the Exit menu and press <Enter>.

Discard Changes and Exit Setup Now?

[Ok] [Cancel]

appears in the window. Select *Ok* to discard changes and exit.

Discard Changes

Select *Discard Changes* from the Exit menu and press <Enter>.

Select *Ok* to discard changes.

Load Optimal Defaults

ezPORT automatically sets all ezPORT Setup options to a complete set of default settings when you Select this option. The Optimal settings are designed for maximum system performance, but may not work best for all computer applications. In particular, do not use the Optimal ezPORT Setup options if your computer is experiencing system configuration problems.

Select *Load Optimal Defaults* from the Exit menu and press <Enter>.

Select *Ok* to load optimal defaults.

Load Fail-Safe Defaults

ezPORT automatically sets all ezPORT Setup options to a complete set of default settings when you Select this option. The Fail-Safe settings are designed for maximum system stability, but not maximum performance. Select the Fail-Safe ezPORT Setup options if your computer is experiencing system configuration problems. Select *Load Fail-Safe Defaults* from the Exit menu and press <Enter>.

Load Fail-Safe Defaults?

[Ok] [Cancel]

appears in the window. Select *Ok* to load Fail-Safe defaults.

Chapter 3

Upgrading

Upgrading the System Memory

The Gator EPIC allows an upgrade of the system memory with up to 1GB unbuffered SDRAM DDR SODIMM modules in one memory slot. ECC and non-ECC DDR SDRAM modules are supported, PC1600 (DDR 200MHz), PC2100 (DDR 266MHz) and PC2700 (DDR 333MHz). It is very important that the quality of the DIMM is good. Unreliable operation of the system may result if poor quality DIMMs are used. Always purchase your memory from a reliable source.

System Memory Features:

- 2.5 V (only) 200-pin DDR SDRAM SODIMMs with gold-plated contacts.
- Unbuffered, unregistered single-sided or double-sided DIMMs.
- Maximum total system memory: 1 GB; minimum total system memory: 32 MB .
- DDR333 MHz (PC2700) and DDR266 MHz (PC2100) DDR SDRAM SODIMMs only.
- Serial Presence Detect (SPD).
- You can use ECC and non-ECC DIMMs.
- Do not use Registered DIMMs.
- Double sided x16 DIMMs are not supported.

The following table lists the supported DDR DIMM Configurations:

Table 3-1 Supported DDRSO DIMM Configurations

DIMM Capacity	# of Dev./ DIMM	# of Sides	DRAM Tech.	Front Side Population		Back Side Population	
				Count	Config	Count	Config
64 MB	4	SS	128 Mbit	4	8 M x 16		
128 MB	8	SS	128 Mbit	8	16 M x 8		
128 MB	4	SS	256 Mbit	4	16 M x 16		
256 MB	16	DS	128 Mbit	8	16 M x 8	8	16 M x 8
256 MB	8	SS	256 Mbit	8	32 M x 8		
256 MB	4	SS	512 Mbit	4	32 M x 16		
512 MB	16	DS	256 Mbit	8	32 M x 8	8	32 M x 8
512 MB	8	SS	512 Mbit	8	64 M x 8		
1024 MB	16	DS	512 Mbit	8	64 M x 8	8	64 M x 8

User's Notes:

Appendix A

Technical Specifications

Chipsets

Core Logic

North Bridge - Intel 855GME.

South Bridge – Intel ICH4.

Peripheral I/O

Standard Microsystems (SMSC) SCH311x.

BIOS

System BIOS

American Megatrends AMIBIOS8.

Flash BIOS

Standard feature for System BIOS. Flash programming built into the BIOS. BIOS to be flashed is read from a floppy.

Embedded I/O

IDE

PCI 32-bit EIDE controller – UDMA 66/100 supported. Mini-Header 44 pin for Solid State IDE disk or any 44 pin IDE device support.

Parallel ATA IDE Interfaces

The ICH4 Parallel ATA IDE controller has the independent bus-mastering Parallel ATA IDE interface. The Parallel ATA IDE interface support the following modes:

- Programmed I/O (PIO): processor controls data transfer.
- 8237-style DMA: DMA offloads the processor, supporting transfer rates of up to 16 MB/sec.
- Ultra DMA: DMA protocol on IDE bus supporting host and target throttling and transfer rates of up to 33 MB/sec.
- ATA-66: DMA protocol on IDE bus supporting host and target throttling and transfer rates of up to 66 MB/sec. ATA-66 protocol is similar to Ultra DMA and is device driver compatible.
- ATA-100: DMA protocol on IDE bus allows host and target throttling. The ICH ATA-100 logic can achieve read transfer rates up to 100 MB/sec and write transfer rates up to 88 MB/sec.

NOTE

ATA-66 and ATA-100 are faster timings and require a specialized cable (80-conductor) to reduce reflections, noise, and inductive coupling.

The Parallel ATA IDE interface also support ATAPI devices (such as CD-ROM drives).

The BIOS supports Logical Block Addressing (LBA) and Extended Cylinder Head Sector (ECHS) translation modes. The drive reports the transfer rate and translation mode to the BIOS. The Gator EPIC supports Laser Servo (LS-120) diskette technology through the Parallel ATA IDE interfaces. The BIOS supports booting from an LS-120 drive.

NOTE

The BIOS will always recognize an LS-120 drive as an ATAPI floppy drive. To ensure correct operation, do not configure the drive as a hard disk drive.

Serial ATA Interfaces

The Gator EPIC features two (Sil 3512) independent Serial ATA ports with a theoretical maximum transfer rate of 150 MB/s per port. One device can be installed on each port for a maximum of two Serial ATA devices. A point-to-point interface is used for host to device connections, unlike Parallel IDE, which supports a master/slave configuration and two devices per channel.

For compatibility, the underlying Serial ATA functionality is transparent to the operating system.

NOTE

Many Serial ATA drives use new low-voltage power connectors and require adaptors or power supplies equipped with low-voltage power connectors.

Serial Ports

Up to six high speed RS-232 serial ports 16 Bytes FIFO (16550/16550D). COM2 optional RS-232 IrDA and COM1 optional RS-422/485. COM1 and COM2 are standard, other ports are optional.

Parallel Port

One bi-directional parallel port. EPP/ECP mode compatible.

Keyboard/Mouse Port

One mouse/keyboard combined connector.

USB Interfaces

Six Universal Serial Bus connectors. USB 1.1 and USB 2.0 compliant.

On-board Ethernet

One Ethernet connector (optional 10/100/1000).

On-board Buzzer

Audio

Audio (AD1981B) AC97 compliant. Microphone In, Stereo Line In and Out, Headphone Out and CD In.

Industrial Devices

Temperature and Voltage Device

Automatic CPU voltage & temperature monitoring device embedded on the peripheral I/O controller.

Power Management

Power button function: advanced power management support.

Miscellaneous

CMOS/Battery

RTC with lithium battery. Connector for external connection.

Control Panel Connections

Reset, Soft Power. LEDs for power and IDE.

CPU

Two possible BGA configurations: ULV 1.0 Ghz Celeron M, 5.5W, 512KB L2 cache or LV 1.4Ghz Pentium M, 10W, 2MB L2 cache.

Form Factor

EPIC form factor (4.5" x 6.5").

PCB Construction

Twelve Layers, dry film mask.

Manufacturing Process

Automated surface mount.

Table A-1 Environmental

Environmental	Operating	Non-operating
Temperature	0° to +55° C	-40° to +65° C
Humidity	5 to 95% @ 40° C non-condensing	5 to 95% @ 40° C non-condensing
Shock	2.5G @ 10ms	10G @ 10ms
Vibration	0.25 @ 5-100Hz	5 @ 5-100Hz

Memory Map

Address Range Decimal	Address Range Hexadecimal	Size	Description
960K-1M	0F0000-0FFFFFFF	64 KB	Upper BIOS
896K-960K	0E0000-0EFFFF	64 KB	Lower BIOS
768K-896K	0C0000-0DFFFF	128 KB	Expansion Card BIOS and Buffer
640K-768K	0A0000-0BFFFF	128 KB	Standard PCI/ISA Video Memory
633K-640K	09E400-09FFFF	7KB	BIOS Reserved
512K-633K	080000-09E3FF	121 KB	Ext. Conventional memory
0K- 512K	000000-07FFFF	512 KB	Conventional memory

DMA Channels

DMA #	Data Width	System Resource
0	8- or 16-bits	
1	8- or 16-bits	Parallel port (for ECP) (if selected)
2	8- or 16-bits	
3	8- or 16-bits	Parallel port (for ECP) (if selected)
4	Reserved-	cascade channel
5	16-bits	Open
6	16-bits	Open
7	16-bits	Open

I/O Map

Address (hex)	Description
0000-000F	DMA 1
0020-0021	Interrupt Controller 1
0040	Timer/Counter 0
0041	Timer/Counter 1
0042	Timer/Counter 2
0043	Timer Control Word
0060	Keyboard Controller Byte _ Reset IRQ
0061	NMI Status and Control
0070, bit 7	NMI enable
0070, bits 6:0	RTC Index
0071	RTC Data
0072	RTC Extended Index
0073	RTC Extended Data
0080-008F	DMA page registers / POST code display also located at 0080h
0092	Port 92
00A0-00A1	Interrupt Controller 2
00B2-00B3	APM control

Address (hex)	Description
00C0-00DE	DMA 2
00F0	Coprocessor Error
0170_0177	Secondary IDE channel
01F0_01F7	Primary IDE channel
0278-027F	LPT2 (if selected)
02E8-02EF	COM4 (default)
02F8-02FF	COM2 (default)
0376	Secondary IDE channel command port
0377	Floppy channel 2 command
0377, bit 7	Floppy disk change, channel 2
0377, bits 6:0	Secondary IDE channel status port
0378-037F	LPT1 (default)
03B4-03B5	Video (VGA)
03BA	Video (VGA)
03BC-03CD	LPT3 (if selected)
03C0-03CA	Video (VGA)
03CC	Video (VGA)
03CE-03CF	Video (VGA)
03D4-03D5	Video (VGA)
03DA	Video (VGA)
03E8-03EF	COM3 (default)
03F0-03F5	Floppy Channel 1
03F6	Primary IDE channel command port
03F7	Floppy Channel 1 command
03F7, bit 7	Floppy disk change channel 1
03F7, bits 6:0	Primary IDE channel status report
03F8-03FF	COM1 (default)
0CF8-0CFB - 4 bytes	PCI configuration address register
0CF9	Reset control register
0CFC-0CFF - 4 bytes	PCI configuration data register

PCI Configuration Space Map

Bus #	Device #	Function #	Description
00	00	00	855GME (Host Bridge)
00	00	01	855GME DDR SDRAM Reg.
00	00	03	855GME Config. Reg.
00	01	00	855GME PCI to PCI Bridge
00	02	00	855GME VGA Controller
00	1D	00	ICH4 USB UHC 1
00	1D	01	ICH4 USB UHC 2
00	1D	02	ICH4 USB UHC 3
00	1D	07	ICH4 USB EHC
00	1E	00	Hub Interface to PCI Bridge
00	1F	00	ICH4 LPC Bridge
00	1F	01	ICH4 Master IDE Controller
00	1F	03	ICH4 SMBus Controller
00	1F	05	ICH4 AC97 Audio Controller
01	00	00	AGP Card

02	02	00	Mini-PCI slot
02	00	00	LAN Controller
02	01	00	SATA
02	04	00	PC104 PCI IDSEL0
02	05		PC104 PCI IDSEL1
02	06		PC104 PCI IDSEL2
02	07		PC104 PCI IDSEL3

Interrupts

IRQ	System Resource
NMI	I/O channel check
0	Reserved, interval timer
1	Reserved (keyboard)
2	Reserved (cascade)
3	COM2*
4	COM1*
5	User Available for PCI
6	Floppy Drive
7	LPT1*
8	Real time clock
9	User Available for PCI
10	User Available for PCI
11	User Available for PCI
12	PS/2 mouse port
13	Reserved (math coprocessor)
14	Primary IDE
15	Secondary IDE

**Default, but can be changed to another IRQ*

SMBUS

Device	Slave Address
SIO	00101101b
SODIMM	01010000b
Clock Chip Write	11010010b
Clock Chip Read	11010011b


PCI Interrupt Routing Map

PCI Device	ID SEL	PIRQA	PIRQB	PIRQC	PIRQD	PIRQE	PIRQF	PIRQG	PIRQH
PC104 PCI	AD20			INTA	INTB	INTC	INTD		
PC104 PCI	AD21			INTB	INTC	INTD	INTA		
PC104 PCI	AD22			INTC	INTD	INTA	INTB		
PC104 PCI	AD23			INTD	INTA	INTB	INTC		
Mini-PCI	AD18					INTB			INTA
Ethernet	AD16							INTA	
IDE				INTA					
Audio			INTA						
SATA	AD17						INTA		
USB 1		INTA							
USB 2					INTA				
USB 3				INTA					
USB 2.0									INTA
SMBus			INTA						
VGA		INTA							

Connectors Pin-out

How to identify pin number 1: Looking to the solder side (The board side with fewer components) of the PCB (Printed Circuit Board), pin number 1 will have a squared pad ■. Other pins will have a circular pad ●.

How to identify other pins: Connectors type DB, PS/2, RJ45, Power ATX and USB are industry standards. DB connectors, for instance, are numbered sequentially. The first row is numbered in sequence (be aware that male and female connectors are mirrored – male connectors are numbered from left to right when viewed from front and female connectors are numbered from right to left when viewed from front). The following rows resume the counting on the same side of pin number 1. The counting is NOT circular like Integrated Circuits (legacy from electronic tubes).



Header connectors are numbered alternately, i.e. pin number 2 is in the other row, but in the same column of pin number 1. Pin number 3 is in the same row of pin 1, but in the next column and so forth.




Table A-9 Serial Port COM1 Header Connector J18

Pin#	Serial Port COM 1 – J18
1	DCD - RS-422/485RXB(opt.)
2	DSR
3	RX - RS-422/485TXB(opt.)
4	RTS
5	TX - RS-422/485TXA(opt.)
6	CTS
7	DTR
8	RI – RS-422/485RXA(opt.)
9	GND
10	N.C.

Table A-10 Serial Port COM2 Header Connector J19

Pin#	Serial Port COM 2 – J19
1	DCD
2	DSR
3	RX
4	RTS
5	TX
6	CTS
7	DTR
8	RI
9	GND
10	N.C

Table A-11 Serial Port COM3 Header Connector J20

Pin#	Serial Port COM 3 – J20
1	DCD
2	DSR
3	RX
4	RTS
5	TX
6	CTS
7	DTR
8	RI
9	GND
10	N.C

Table A-12 Serial Port COM4 Header Connector J21

Pin#	Serial Port COM 4 – J21
1	DCD
2	DSR
3	RX
4	RTS
5	TX
6	CTS
7	DTR
8	RI
9	GND
10	N.C

Table A-13 Serial Port COM5-6 Header Connector J22

Pin#	Serial Port COM5-6 Header – J22
1	RX5 TTL
2	TX5 TTL
3	RX5 RS232
4	SCOUT5 RS232
5	TX5 RS232
6	SCIN5 RS232
7	GND
8	GND
9	RX6 RS232
10	SCOUT6 RS232
11	TX6 RS232
12	SCIN6 RS232
13	N.C.
14	N.C.

Table A-14 J7 Ethernet

Pin#	Ethernet (optional 1Gbe) Connector – J17
1	TX1+ (optional 1Gbe)
2	RX-/ RX- (optional 1Gbe)
3	TX1- (optional 1Gbe)
4	RX+/RX+ (optional 1Gbe)
5	RX1+ (optional 1Gbe)
6	TX-/ TX- (optional 1Gbe)
7	RX1- (optional 1Gbe)
8	TX+/TX+ (optional 1Gbe)
9	CHASSIS GND
10	CHASSIS GND
11	LED ACT
12	LED LINK
13	3.3V/SPEED (optional 1Gbe)
14	SPEED

Table A-15 J24 USB Ports 0 & 1 Header Connector

Pin#	USB Header – J24
1	+5V – USB0
2	+5V – USB1
3	-D – USB0
4	-D – USB1
5	+D – USB0
6	+D – USB1
7	GROUND – USB0
8	GROUND – USB1
9	NC
10	Over Current

Table A-16 J25 USB Ports 2 & 3 Header Connector

Pin#	USB Header – J25
1	+5V – USB2
2	+5V – USB3
3	-D – USB2
4	-D – USB3
5	+D – USB2
6	+D – USB3
7	GROUND – USB2
8	GROUND – USB3
9	NC
10	Over Current

Table A-17 J26 USB Ports4 & 5 Header Connector

Pin#	USB Header – J26
1	+5V – USB4
2	+5V – USB5
3	-D – USB4
4	-D – USB5
5	+D – USB4
6	+D – USB5
7	GROUND – USB4
8	GROUND – USB5
9	NC
10	Over Current

Table A-18 J3 VGA Header Connector

Pin#	VGA Header – J3
1	RED
2	GND
3	GREEN
4	GND
5	BLUE
6	GND
7	HSYNC
8	GND
9	VSYNC
10	GND
11	DDC SCL
12	GND
13	DDC SDA
14	VCC 5V

Table A-19 J10 KBD/Mouse Header Connector

Pin#	KBD/Mouse Header – J10
1	MSCLOCK
2	KBCLOCK
3	N.C.
4	KBDATA
5	VCC
6	VCC
7	GND
8	MSDATA
9	GND
10	N.C.

Table A-20 J28 Front Panel Header Connector

Pin#	Front Panel Header – J28
1	HDD LED Anode
2	Power LED Green Blink
3	HDD LED Cathode
4	Power LED Yellow Blink
5	Reset - GND
6	Power Switch
7	Reset
8	Power Switch - GND
9	+5V
10	NC

Table A-21 J29 Front Panel Header Connector-IR

Pin#	Front Panel IR Header – J29
1	Infra Red Rx (Opt.)
2	GND
3	GND
4	NC
5	Infra Red Tx (Opt.)
6	+5VDC

Table A-22 J30 Power Connector

Pin#	Power – J30
1	PS_ON
2	GND
3	GND
4	+12V
5	+3.3V
6	+5V STDBY
7	+5V
8	+5V
9	-12V
10	GND

Table A23 J17 Parallel Header Connector

Pin#	Parallel Header – J17
1	STROBE
2	AUTOFEED
3	+DATA BIT 0
4	ERROR
5	+DATA BIT 1
6	INIT
7	+DATA BIT 2
8	SLCT IN
9	+DATA BIT 3
10	GND
11	+DATA BIT 4
12	GND
13	+DATA BIT 5
14	GND
15	+DATA BIT 6
16	GND
17	+DATA BIT 7
18	GND
19	ACK
20	GND
21	BUSY
22	GND
23	PAPER EMPTY
24	GND
25	SLCT
26	NC

Table A-24 CPU Fan, External Battery, Speaker, CD IN and Line IN.

Connector	Description			
J27	CPU FAN			
	1) GND	2)+12V	3) Sense	
J6	External Battery			
	1)+Vbat		2)GND	
J12	Speaker (Alternate)			
	1)VCC	2) GND (PWM)		3) GND (PWM)
JP7	CD IN			
	1) Right	2)GND	3)GND	4) Left
JP8	Line IN			
	1) Right	2)GND	3)GND	4) Left

Table A-25 J2 Audio Microphone, Line out/Headphone Connector

Pin#	Audio Microphone, Line Out/Headphone – J2
1	MIC
2	GND
3	MIC BIAS
4	+5V
5	LINEOUT/HEADPHONE RIGHT
6	N.C.
7	N.C.
8	N.C.
9	LINEOUT/HEADPHONE LEFT
10	SENSE

Table A-26 J5 LVDS Backlight Connector

Pin#	LVDS Backlight – J5
1	Inverter Vcc
2	GND
3	GND
4	Backlight Logic Vcc
5	SMBUS Clock (optional)
6	SMBUS Data (optional)
7	Backlight Enable

Table A-27 J4 LVDS Connector

Pin#	LVDS – J4
1	GND
2	LVDS VDD 3.3V
3	LVDS VDD 3.3V
4	LVDS DDC VCC 3.3V
5	NC
6	DDC CLK
7	DDC DATA
8	LVDS YAM0
9	LVDS YAP0
10	GND
11	LVDS YAM1
12	LVDS YAP1
13	GND
14	LVDS YAM2
15	LVDS YAP2
16	GND
17	LVDS CLK AM
18	LVDS CLK AP

19	GND
20	LVDS YBM0
21	LVDS YBP0
22	GND
23	LVDS YBM1
24	LVDS YBP1
25	GND
26	LVDS YBM2
27	LVDS YBP2
28	GND
29	LVDS CLK BM
30	LVDS CLK BP

User's Notes:

Appendix B Flash BIOS programming and codes

The Gator EPIC offers the standard FLASH BIOS. When installed, you will be able to update your BIOS without having to replace the EEPROM. The AMIBIOS8 will read the new BIOS file from a USB floppy disk during boot and replace the old BIOS.

When updating your BIOS, make sure you have a disk with the correct BIOS file (its size should be 4Mb (512kB)) named AMIBOOT.ROM.

How to reflash the BIOS:

- Insert a floppy containing AMIBOOT.ROM into (USB) floppy A:
- Press [ctrl][home] during the beginning of POST(boot).
- Wait for the procedure to finish and reboot.

Please never turn the power off while reprogramming a FLASH BIOS.

Troubleshooting POST

AMIBIOS8 writes progress codes, also known as POST codes, to I/O port 80h during POST, in order to provide information to OEM developers about system faults. These POST codes may be monitored by the On-board POST Display.

Table B-1 Bootblock Initialization Code Checkpoints

The Bootblock initialization code sets up the chipset, memory and other components before system memory is available. The following table describes the type of checkpoints that may occur during the bootblock initialization portion of the BIOS.

Checkpoint Code	Description
Before D1	Early chipset initialization is done. Early super I/O initialization is done including RTC and keyboard controller. NMI is disabled.
D1	Perform keyboard controller BAT test. Check if waking up from power management suspend state. Save power-on CPUID value in scratch CMOS.
D0	Go to flat mode with 4GB limit and GA20 enabled. Verify the bootblock checksum.
D2	Disable CACHE before memory detection. Execute full memory sizing module. Verify that flat mode is enabled.
D3	If memory sizing module not executed, start memory refresh and do memory sizing in Bootblock code. Do additional chipset initialization. Re-enable CACHE. Verify that flat mode is enabled.
D4	Test base 512KB memory. Adjust policies and cache first 8MB. Set stack.
D5	Bootblock code is copied from ROM to lower system memory and control is given to it. BIOS now executes out of RAM.
D6	Both key sequence and OEM specific method is checked to determine if BIOS recovery is forced. Main BIOS checksum is tested. If BIOS recovery is necessary, control flows to checkpoint E0. See <i>Bootblock Recovery Code Checkpoints</i> section of document for more information.
D7	Restore CPUID value back into register. The Bootblock-Runtime interface module is moved to system memory and control is given to it. Determine whether to execute serial flash.

D8	The Runtime module is uncompressed into memory. CPUID information is stored in memory.
D9	Store the Uncompressed pointer for future use in PMM. Copying Main BIOS into memory. Leaves all RAM below 1MB Read-Write including E000 and F000 shadow areas but closing SMRAM.
DA	Restore CPUID value back into register. Give control to BIOS POST (ExecutePOSTKernel). See <i>POST Code Checkpoints</i> section of document for more information.
E1-E8 EC-EE	OEM memory detection/configuration error. This range is reserved for chipset vendors & system manufacturers.

Table B-2 Bootblock Recovery Code Checkpoints

The Bootblock recovery code gets control when the BIOS determines that a BIOS recovery needs to occur because the user has forced the update or the BIOS checksum is corrupt. The following table describes the type of checkpoints that may occur during the Bootblock recovery portion of the BIOS:

Checkpoint Code	Description
E0	Initialize the floppy controller in the super I/O. Some interrupt vectors are initialized. DMA controller is initialized. 8259 interrupt controller is initialized. L1 cache is enabled.
E9	Set up floppy controller and data. Attempt to read from floppy.
EA	Enable ATAPI hardware. Attempt to read from ARMD and ATAPI CDROM.
EB	Disable ATAPI hardware. Jump back to checkpoint E9.
EF	Read error occurred on media. Jump back to checkpoint EB.
F0	Search for pre-defined recovery file name in root directory.
F1	Recovery file not found.
F2	Start reading FAT table and analyze FAT to find the clusters occupied by the recovery file.
E0	Initialize the floppy controller in the super I/O. Some interrupt vectors are initialized. DMA controller is initialized. 8259 interrupt controller is initialized. L1 cache is enabled.
E9	Set up floppy controller and data. Attempt to read from floppy.
EA	Enable ATAPI hardware. Attempt to read from ARMD and ATAPI CDROM.
EB	Disable ATAPI hardware. Jump back to checkpoint E9.
EF	Read error occurred on media. Jump back to checkpoint EB.
F0	Search for pre-defined recovery file name in root directory.
F1	Recovery file not found.
F2	Start reading FAT table and analyze FAT to find the clusters occupied by the recovery file.

Table B-3 POST Code Checkpoints

The POST code checkpoints are the largest set of checkpoints during the BIOS pre-boot process. The following table describes the type of checkpoints that may occur during the POST portion of the BIOS:

Checkpoint Code	Description
03	Disable NMI, Parity, video for EGA, and DMA controllers. Initialize BIOS, POST, Runtime data area. Also initialize BIOS modules on POST entry and GPNV area. Initialized CMOS as mentioned in the Kernel Variable "wCMOSFlags."
04	Check CMOS diagnostic byte to determine if battery power is OK and CMOS checksum is OK. Verify CMOS checksum manually by reading storage area. If the CMOS checksum is bad, update CMOS with power-on default values and clear passwords. Initialize status register A. Initializes data variables that are based on CMOS setup questions. Initializes both the 8259 compatible PICs in the system
05	Initializes the interrupt controlling hardware (generally PIC) and interrupt vector table.
06	Do R/W test to CH-2 count reg. Initialize CH-0 as system timer. Install the POSTINT1Ch handler. Enable IRQ-0 in PIC for system timer interrupt.

	Traps INT1Ch vector to "POSTINT1ChHandlerBlock."
C0	Early CPU Init Start -- Disable Cache - Init Local APIC
C1	Set up boot strap processor Information
C2	Set up boot strap processor for POST
C5	Enumerate and set up application processors
C6	Re-enable cache for boot strap processor
C7	Early CPU Init Exit
0A	Initializes the 8042 compatible Key Board Controller.
0B	Detects the presence of PS/2 mouse.
0C	Detects the presence of Keyboard in KBC port.
0E	Testing and initialization of different Input Devices. Also, update the Kernel Variables. Traps the INT09h vector, so that the POST INT09h handler gets control for IRQ1. Uncompress all available language, BIOS logo, and Silent logo modules.
13	Early POST initialization of chipset registers.
24	Uncompress and initialize any platform specific BIOS modules.
30	Initialize System Management Interrupt.
2A	Initializes different devices through DIM. See <i>DIM Code Checkpoints</i> section of document for more information.
2C	Initializes different devices. Detects and initializes the video adapter installed in the system that have optional ROMs.
2E	Initializes all the output devices.
31	Allocate memory for ADM module and uncompress it. Give control to ADM module for initialization. Initialize language and font modules for ADM. Activate ADM module.
33	Initializes the silent boot module. Set the window for displaying text information.
37	Displaying sign-on message, CPU information, setup key message, and any OEM specific information.
38	Initializes different devices through DIM. See <i>DIM Code Checkpoints</i> section of document for more information.
39	Initializes DMAC-1 & DMAC-2.
3A	Initialize RTC date/time.
3B	Test for total memory installed in the system. Also, Check for DEL or ESC keys to limit memory test. Display total memory in the system.
3C	Mid POST initialization of chipset registers.
40	Detect different devices (Parallel ports, serial ports, and coprocessor in CPU, ... etc.) successfully installed in the system and update the BDA, EBDA...etc.
50	Programming the memory hole or any kind of implementation that needs an adjustment in system RAM size if needed.
52	Updates CMOS memory size from memory found in memory test. Allocates memory for Extended BIOS Data Area from base memory.
60	Initializes NUM-LOCK status and programs the KBD typematic rate.
75	Initialize Int-13 and prepare for IPL detection.
78	Initializes IPL devices controlled by BIOS and option ROMs.
7A	Initializes remaining option ROMs.
7C	Generate and write contents of ESCD in NVRam.
84	Log errors encountered during POST.
85	Display errors to the user and gets the user response for error.
87	Execute BIOS setup if needed / requested.
8C	Late POST initialization of chipset registers.
8D	Build ACPI tables (if ACPI is supported)
8E	Program the peripheral parameters. Enable/Disable NMI as selected
90	Late POST initialization of system management interrupt.
A0	Check boot password if installed.
A1	Clean-up work needed before booting to OS.
A2	Takes care of runtime image preparation for different BIOS modules. Fill the free area in

	F000h segment with 0FFh. Initializes the Microsoft IRQ Routing Table. Prepares the runtime language module. Disables the system configuration display if needed.
A4	Initialize runtime language module.
A7	Displays the system configuration screen if enabled. Initialize the CPU's before boot, which includes the programming of the MTRR's.
A8	Prepare CPU for OS boot including final MTRR values.
A9	Wait for user input at config display if needed.
AA	Uninstall POST INT1Ch vector and INT09h vector. Deinitializes the ADM module.
AB	Prepare BBS for Int 19 boot.
AC	End of POST initialization of chipset registers.
B1	Save system context for ACPI.
00	Passes control to OS Loader (typically INT19h).
61-70	OEM POST Error.

Table B-4 DIM Code Checkpoints

The Device Initialization Manager (DIM) gets control at various times during BIOS POST to initialize different system busses. The following table describes the main checkpoints where the DIM module is accessed:

Checkpoint Code	Description
2A	Initialize different buses and perform the following functions: Reset, Detect, and Disable (function 0); Static Device Initialization (function 1); Boot Output Device Initialization (function 2). Function 0 disables all device nodes, PCI devices, and PnP ISA cards. It also assigns PCI bus numbers. Function 1 initializes all static devices that include manual configured onboard peripherals, memory and I/O decode windows in PCI-PCI bridges, and noncompliant PCI devices. Static resources are also reserved. Function 2 searches for and initializes any PnP, PCI, or AGP video devices.
38	Initialize different buses and perform the following functions: Boot Input Device Initialization (function 3); IPL Device Initialization (function 4); General Device Initialization (function 5). Function 3 searches for and configures PCI input devices and detects if system has standard keyboard controller. Function 4 searches for and configures all PnP and PCI boot devices. Function 5 configures all onboard peripherals that are set to an automatic configuration and configures all remaining PnP and PCI devices.

While control is in the different functions, additional checkpoints are output to port 80h as a word value to identify the routines under execution. The low byte value indicates the main POST Code Checkpoint. The high byte is divided into two nibbles and contains two fields. The details of the high byte of these checkpoints are as follows:

HIGH BYTE XY

The upper nibble 'X' indicates the function number that is being executed. 'X' can be from 0 to 7.

- 0 = func#0, disable all devices on the BUS concerned.
- 1 = func#1, static devices initialization on the BUS concerned.
- 2 = func#2, output device initialization on the BUS concerned.
- 3 = func#3, input device initialization on the BUS concerned.
- 4 = func#4, IPL device initialization on the BUS concerned.
- 5 = func#5, general device initialization on the BUS concerned.
- 6 = func#6, error reporting for the BUS concerned.
- 7 = func#7, add-on ROM initialization for all BUSES.
- 8 = func#8, BBS ROM initialization for all BUSES.

The lower nibble 'Y' indicates the BUS on which the different routines are being executed. 'Y' can be from 0 to 5.

- 0 = Generic DIM (Device Initialization Manager).

- 1 = On-board System devices.
- 2 = ISA devices.
- 3 = EISA devices.
- 4 = ISA PnP devices.
- 5 = PCI devices.

Table B-5 ACPI Runtime Checkpoints

ACPI checkpoints are displayed when an ACPI capable operating system either enters or leaves a sleep state. The following table describes the type of checkpoints that may occur during ACPI sleep or wake events:

Checkpoint Code	Description
AC	First ASL check point. Indicates the system is running in ACPI mode.
AA	System is running in APIC mode.
01, 02, 03, 04, 05	Entering sleep state S1, S2, S3, S4, or S5.
10, 20, 30, 40, 50	Waking from sleep state S1, S2, S3, S4, or S5.

Critical Error BEEP Codes

The following table describes the beep codes that are used by AMIBIOS:

Table B-6 AMIBIOS Beep Codes

Number of Beeps	Description
1	Memory refresh timer error.
2	Parity error
3	Main memory read / write test error.
4	Motherboard timer not operational
5	Processor error
6	Keyboard controller BAT test error.
7	General exception error.
8	Display memory error.
9	ROM checksum error
10	CMOS shutdown register read/write error
11	Cache memory bad

User's Notes:

Appendix C

On-Board Industrial Devices

The Gator EPIC offers an on-board 10/100 (10/100/1000 optional) Ethernet controller and up to six serial ports (one optional RS422/485).

On-board Ethernet

The Gator EPIC features either a 10/100 Ethernet controller or a 10/100/1000 Ethernet controller. Ethernet controller 10/100 is an Intel 82559ER 10/1000 (or 82551ER), that may optionally be upgraded to an Intel 82541ER, which is a 10/100/1000Mbps device.

The 82559ER/551ER is a 32-bit PCI controller that features enhanced scatter-gather bus mastering capabilities, which enable the 82559ER/551ER to perform high-speed data transfers over the PCI bus. The 82559ER/551ER bus master capabilities enable the component to process high-level commands and to perform multiple operations, thereby off-loading communication tasks from the system CPU.

It can operate in either full duplex or half duplex mode. In full duplex mode it adheres to the IEEE 802.3x Flow Control specification. Half duplex performance is enhanced by a proprietary collision reduction mechanism.

The Intel® 82541ER (optional) integrates fourth generation gigabit MAC design with fully integrated, physical layer circuitry to provide a standard IEEE 802.3 Ethernet interface for 1000BASE-T, 100BASE-TX, and 10BASE-T applications (802.3, 802.3u, and 802.3ab). The controller is capable of transmitting and receiving data at rates of 1000 Mbps, 100 Mbps, or 10 Mbps. In addition to managing MAC and PHY layer functions, the controller provides a 32-bit wide direct Peripheral Component Interconnect (PCI) 2.3 compliant interface capable of operating at 33 or 66 MHz.

The 82541ER Architecture is designed for high performance and low memory latency. Wide internal data paths eliminate performance bottlenecks by efficiently handling large address and data words. The 82541ER controller includes advanced interrupt handling features to limit PCI bus traffic and a PCI interface that maximizes efficient bus usage. The 82541ER uses efficient ring buffer descriptor data structures, with up to 64 packet descriptors cached on chip. A large 64Kbyte on-chip packet buffer maintains superior performance as available PCI bandwidth changes. In addition, using hardware acceleration, the controller offloads tasks from the host controller, such as TCP/UDP/IP checksum calculations and TCP segmentation.

The pin out of the Ethernet connector J7 can be seen on *Table A14*.

Serial Ports

The Gator EPIC can be configured with up to six fixed RS-232 serial ports (COM1 RS-422/485 optional). COM1 and COM2 are standard, the others are optional.

The pin out of COM1 to COM 6 connectors can be seen on *Table A9 to Table A13*.

TIA/EIA-232

RS is the abbreviation for recommended standard. Usually, it is based on or is identical to other standards, e.g., EIA/TIA-232-F. TIA/EIA-232, previously known as RS-232 was developed in the 1960's to interconnect layers of the interface (ITU-T V.11), but also the pignut of the appropriate connectors (25-pin D-type or 9-pin DB9S) (ISO 2210) and the protocol (ISSUED-T V.24). The interface standard specifies also handshake and control lines in addition to the 2 unidirectional receive data line (RD) and transmit data line (TD). The control lines data carrier detect (DCD), data set ready (DSR), request to send (RTS), clear to send (CTS), data terminal ready (DTR), and the ring indicator (RI) might be used, but do not necessarily have to be (for example, the PC-serial-mouse utilizes only

RI, TD, RD and GND). Although the standard supports only low speed data rates and line length of approximately 20 m maximum, it is still widely used. This is due to its simplicity and low cost.

Electrical


TIA/EIA-232 has high signal amplitudes of $\pm(5\text{ V to }15\text{ V})$ at the driver output. The triggering of the receiver depends on the sign of the input voltage: that is, it senses whether the input is above 3 V or less than -3 V . The line length is limited by the allowable capacitive load of less than 2500 pF. This results in a line length of approximately 20 m. The maximum slope of the signal is limited to 30 V/ms. The intention here is to limit any reflections that can occur to the rise-and fall-times of the signal. Therefore, transmission line theory does not need to be applied, so no impedance matching and termination measures are necessary.

Do not connect termination resistor when operating in RS-232 mode.

Protocol


Different from other purely electrical-layer-standards, TIA/EIA-232 defines not only the physical layer of the interface (ITU-T V.11), but also the pinout of the appropriate connectors (25-pin D-type or 9-pin DB9S) (ISO 2210) and the protocol (ITU-T V.24). The interface standard specifies also handshake and control lines in addition to the 2 unidirectional receive data line (RD) and transmit data line (TD). The control lines might be used, but do not necessarily have to be.

RS-232 is Single-Ended Point-to-point Transmission



Single-Ended, Point-to-Point

Single-ended transmission is performed on one signal line, and the logical state is interpreted with respect to ground. For simple, low-speed interfaces, a common ground return path is sufficient; for more advanced interfaces featuring higher speeds and heavier loads, a single return path for each signaling line (twisted pair cable) is recommended. The figure below shows the electrical schematic diagram of a single-ended transmission system.

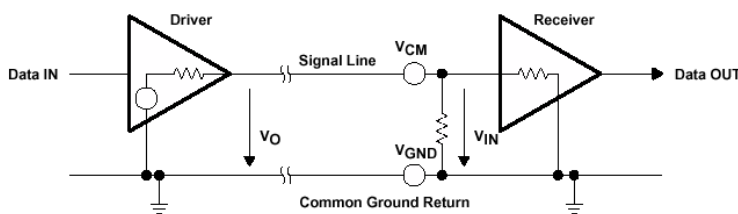

Advantages of Single-Ended Transmission


The advantages of single-ended transmission are simplicity and low cost of implementation. A single-ended system requires only one line per signal. It is therefore ideal for cabling, and connector costs are more important than the data transfer rate, e.g. PC, parallel printer port or serial communication with many handshaking lines, e.g. EIA-232. Cabling costs can be kept to a minimum with short distance communication, depending on data throughput, requiring no more than a low cost ribbon cable. For longer distances and/or noisy environments, shielding and additional ground lines are essential. Twisted pair cables are recommended for line lengths of more than 1 meter.

TIA/EIA-422

TIA/EIA-422 (RS-422) allows a multi-drop interconnection of one driver, transmitting unidirectionally to up to 10 receivers. Although it is not capable of bidirectional transfer, it is still applicable and used for talker-audience scenarios.

Electrical

TIA/EIA-422 (ITU-T V.11) is comparable to TIA/EIA-485. It is limited to unidirectional data traffic and is **terminated only at the line-end opposite to the driver**. The maximum line length is 1200m, the maximum data rate is determined by the signal rise- and fall-times at the receiver's side (requirement: <10% of bit duration). TIA/EIA-422 allows up to ten receivers (input impedance of 4 k Ω attached to one driver. The maximum load is limited to 80 Ω . Although any TIA/EIA-485 transceiver can be used in a TIA/EIA-422 system, dedicated TIA/EIA-422 circuits are not feasible for TIA/EIA-485, due to short circuit current limitations. The TIA/EIA-422 standard requires only short circuit limitation to 150 mA to ground, while TIA/EIA-485 additionally has to limit short circuit currents to 250 mA from the bus pins to -7 V and 12 V to address malfunctions in combination with ground shifts.

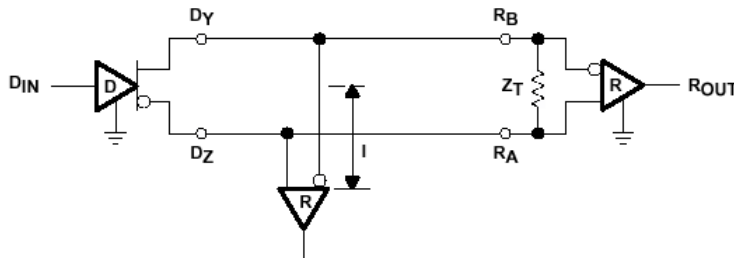


RS-422 is terminated only at the line-end opposite to the driver even if there is only one receiver.

Protocol

Not applicable/none specified.


RS-422 is Differential and may be either Point-to-Point or Multi-Drop Connected

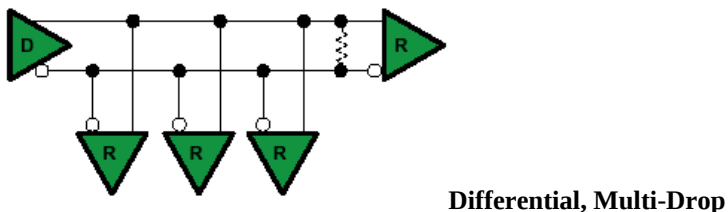

Differential Transmission

For balanced or differential transmission, a pair of signal lines is necessary for each channel. On one line, a true signal is transmitted, while on the second one, the inverted signal is transmitted. The receiver detects voltage

difference between the inputs and switches the output depending on which input line is more positive. As shown below, there is additionally a ground return path.

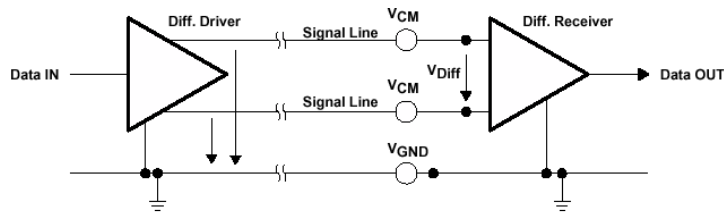

Balanced interface circuits consist of a generator with differential outputs and a receiver with differential inputs. Better noise performance stems from the fact that noise is coupled into both wires of the signal pair in much the same way and is common to both signals. Due to the common mode rejection capability of a differential amplifier, this noise will be rejected. Additionally, since the signal line emits the opposite signal like the adjacent signal return line, the emissions cancel each other. This is true in any case for crosstalk from and to neighboring signal lines. It is also true for noise from other sources as long as the common mode voltage does not go beyond the common mode range of the receiver. Since ground noise is also common to both signals, the receiver rejects this noise as well. The twisted pair cable used in these interfaces in combination with a correct line termination—to avoid line reflections—allows very high data rates and a cable length of up to 1200 m.

Advantages of Differential Transmission


Differential data transmission schemes are less susceptible to common-mode noise than single-ended schemes. Because this kind of transmission uses two wires with opposite current and voltage swings compared to only one wire for single-ended, any external noise is coupled onto the two wires as a common mode voltage and is rejected by the receivers. This two-wire approach with opposite current and voltage swings also radiates less electro-magnetic interference (EMI) noise than single-ended signals due to the canceling of magnetic fields.

TIA/EIA-485

Historically, TIA/EIA-422 was on the market before TIA/EIA-485. Due to the lack of bi-directional capabilities, a new standard adding this feature was created: TIA/EIA-485. The standard (TIA/EIA-485-A or ISO/IEC 8284) defines the electrical characteristics of the interconnection, including driver, line, and receiver. It allows data rates in the range of 35 Mbps and above and line lengths of up to 1200 m. Of course both limits can not be reached at the same time. Furthermore, recommendations are given regarding wiring and termination. The specification does not give any advice on the connector or any protocol requirements.

Electrical

TIA/EIA-485 describes a half-duplex, differential transmission on cable lengths of up to 1200 m and at data rates of typically up to 35 Mbps (requirement similar to TIA/EIA-422, but $t_r < 30\%$ of the bit duration, there are also faster devices available, suited for higher rates under certain load-conditions). The standard allows a maximum of 32 unit loads of 12 k Ω , equal to 32 standard nodes or even higher count with increased input impedance. The maximum total load should not drop below 52 Ω . The common-mode voltage levels on the bus have to maintain between -7 V and 12 V. The receivers have to be capable to detect a differential input signal as low as 200 mV.

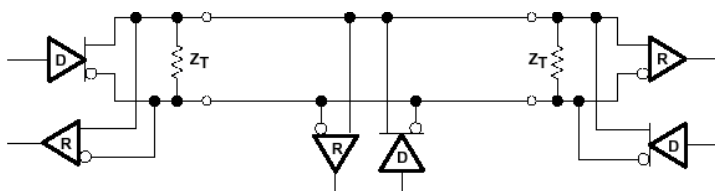


RS-485 is terminated at both sides of the common bus, even if only two stations are connected to the backbone.

Protocol

Not applicable/none specified; exceptions: SCSI systems and the DIN-Bus DIN66348.

RS-485 is Differential and Multi-Point Connected

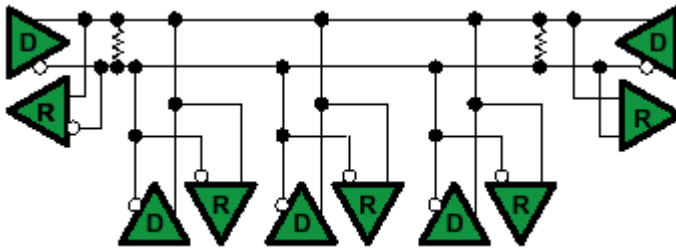

Differential Transmission

Please, read the Differential Transmission explanation in the previous RS-422 section.

Termination Resistors

Follow instructions in the previous RS-422 and RS-485 sections. The termination resistors available are rated to 120Ω.

Ground Connections

All 422- and 485-compliant system configurations shown up to this point do not have incorporated signal-return paths to ground. Obviously, having a solid ground connection so that both receivers and drivers can talk error free is imperative. The figure below shows how to make this connection and recommends adding some resistance between logic and chassis ground to avoid excess ground-loop currents. Logic ground does not have any resistance in its path from the driver or receiver. A potential problem might exist, especially during transients, when a high-voltage potential between the remote grounds could develop. Therefore, some resistance between them is recommended.

The diagram shows the ground connections for an RS-485 system. It features two drivers (labeled DIR) and two receivers (labeled R) connected in a differential configuration. The bus lines are connected to the drivers and receivers. At each end of the bus, there is a termination resistor (labeled Z_T). The ground connections are shown at both ends. On the left, the ground is connected to a common ground point. On the right, the ground is connected to a common ground point, which is labeled 'Chassis Ground'. A 'Logic Ground' is also shown, connected to the common ground point. A 100 Ω resistor is connected between the Logic Ground and the Chassis Ground. The diagram also shows 100 Ω resistors connected to the ground pins of the drivers and receivers.

57

User's Notes:

Appendix

On-Board Video Controller

The Gator EPIC has an On-board video controller. The On-board video controller is based on the Intel 82855GME GMCH.

Graphics Features

The GMCH IGD provides a highly integrated graphics accelerator delivering high performance 2D, 3D, and video capabilities. With its interfaces to UMA using a DVMT configuration, an analog display and a LVDS port, the GMCH can provide a complete graphics solution.

The GMCH also provides 2D hardware acceleration for block transfers of data (BLTs). The BLT engine provides the ability to copy a source block of data to a destination and perform raster operations (e.g., ROP1, ROP2, and ROP3) on the data using a pattern, and/or another destination. Performing these common tasks in hardware reduces CPU load, and thus improves performance.

High bandwidth access to data is provided through the system memory interface. The GMCH uses Tiling architecture to increase system memory efficiency and thus maximize effective rendering bandwidth. The Intel 855GME GMCH improves 3D performance and quality with 3D Zone rendering technology. The Intel 855GME GMCH also supports Video Mixer rendering, and Bi-Cubic filtering.

3D/2D Instruction Processing

The GMCH contains an extensive set of instructions that control various functions including 3D rendering, BLT operations, display, MPEG decode acceleration, and overlay. The 3D instructions set 3D pipeline states and control the processing functions. The 2D instructions provide an efficient method for invoking BLT operations.

3D Engine

The 3D engine of the GMCH has been designed with a deeply pipelined architecture, where performance is maximized by allowing each stage of the pipeline to simultaneously operate on different primitives or portions of the same primitive. The GMCH supports the following:

- Perspective-corrected Texture mapping
- Multitexturing
- Embossed and Dot-Product Bump mapping
- Cubic Environment Maps
- Bilinear, Trilinear, and Anisotropic MIP map filtering
- Gouraud shading and Flat shading
- Alpha-blending
- Per-Vertex and per-pixel fog
- Z/W buffering

These features are independently controlled via a set of 3D instructions. The 3D pipeline subsystem performs the 3D rendering acceleration. The main blocks of the pipeline are the Setup Engine, Scan Converter, Texture Pipeline, and Raster Pipeline. A typical programming sequence would be to send instructions to set the state of the pipeline followed by rendering instructions containing 3D primitive vertex data.

2D Engine

The GMCH provides an extensive set of 2D instructions and 2D HW acceleration for block transfers of data (BLTs). The BLT engine provides the ability to copy a source block of data to a destination and perform operations (e.g., ROP1, ROP2, and ROP3) on the data using a pattern, and/or another destination. The Stretch BLT engine is used to move source data to a destination that need not be the same size, with source transparency. Performing these common tasks in hardware reduces CPU load, and thus improves performance.

Display Features

The Intel 855GME GMCH has four display ports, one analog and three digital. With these interfaces, the GMCH can provide support for a progressive scan analog monitor, a dedicated dual channel LVDS LCD panel, and two DVO devices (not available in the Gator EPIC). Each port can transmit data according to one or more protocols. The data that is sent out the display port is selected from one of the two possible sources, Pipe A or Pipe B.

GMCH Analog Display Port

Intel 855GME GMCH has an integrated 350-MHz, 24-bit RAMDAC that can directly drive a progressive scan analog monitor pixel resolution up to 1600x1200 at 85-Hz refresh and up to 2048x1536 at 75-Hz refresh. The Analog display port can be driven by Pipe A or Pipe B.

Analog Display Port Characteristics

The Analog display port provides an RGB signal output along with an HSYNC and VSYNC signal. There is an associated DDC signal pair that is implemented using GPIO pins dedicated to the analog port. The intended target device is for a CRT based monitor with a VGA connector.

Integrated RAMDAC

The display function contains a 350-MHz, integrated, 24-bit, RAM-based Digital-to-Analog Converter (RAMDAC) that transforms up to 2048X1536 digital pixels at a maximum refresh rate of 75-Hz. Three, 8-bit DACs provide the R, G, and B signals to the monitor.

DDC (Display Data Channel)

DDC is defined by VESA. It allows communication between the host system and display. Both configuration and control information can be exchanged allowing plug-and-play systems to be realized. Support for DDC 1 and 2 is implemented.

GMCH Integrated LVDS Port

The Intel 855GME GMCH have an integrated dual channel LFP Transmitter interface to support LVDS LCD panel resolutions up to UXGA. The display pipe provides panel up-scaling to fit a smaller source image onto a specific native panel size, as well as provides panning and centering support. The LVDS port is only supported on Pipe B. The LVDS port can only be driven by Pipe B, either independently or simultaneously with the Analog Display port. Spread Spectrum Clocking is supported: center and down spread support of 0.5%, 1%, and 2.5% utilizing an external SSC clock.

Dedicated LVDS Interface

The GMCH has a dedicated ANSI/TIA/EIA –644-1995 Specification compliant dual channel LFP LVDS interface that can support TFT panel resolutions up to UXGA with a maximum pixel format of 18 bpp (with SSC supported frequency range from 35-MHz to 112-MHz (single channel/dual channel).

The display pipe selected by the LVDS display port is programmed with the panel timing parameters that are determined by installed panel specifications or read from an onboard EDID ROM. The programmed timing values are then “locked” into the registers to prevent unwanted corruption of the values. From that point on, the display modes are changed by selecting a different source size for that pipe, programming the VGA registers, or selecting a source size and enabling the VGA. The timing signals will remain stable and active through mode changes. These mode changes include VGA to VGA, VGA to HiRes, HiRes to VGA, and HiRes to HiRes.

The transmitter can operate in a variety of modes and supports several data formats. The serializer supports 6-bit or 8-bit color and single or dual channel operating modes. The display stream from the display pipe is sent to the LVDS transmitter port at the dot clock frequency, which is determined by the panel timing requirements. The output of LVDS is running at a fixed multiple of the dot clock frequency, which is determined by the mode of operation; single or dual channel.

Depending on configuration and mode, a single channel can take 18-bits of RGB pixel data plus 3 bits of timing control (HSYNC/VSYNC/DE) and output them on three differential data pair outputs; or 24 bits of RGB plus 3 bits of timing control output on four differential data pair outputs. A dual channel interface converts 36 bits or 48 bits of color information plus the 3 bits of timing control and outputs it on six or eight sets of differential data outputs.

This display port is normally used in conjunction with the pipe functions of panel scaling and a 6-bit to 8-bit dither.

This display port is also used in conjunction with the panel power sequencing and additional associated functions.

When enabled, the LVDS constant current drivers consume significant power. Individual pairs or sets of pairs can be selected to be powered down when not used. When disabled, individual or sets of pairs will enter a low power state.

When the port is disabled all pairs enter a low power mode. The panel power sequencing can be set to override the selected power state of the drivers during power sequencing.

LVDS Interface Signals

LVDS for flat panel is compatible with the ANSI/TIA/EIA-644 specification. This is an electrical standard only defining driver output characteristics and receiver input characteristics. There are two LVDS transmitter channels (channel A and channel B) in the LVDS interface. Each channel consists of four data pairs and a clock pair. The interface consists of a total of ten differential signal pairs of which eight are data and two are clocks. The phase locked transmit clock is transmitted in parallel with the data being sent out over the data pairs and over the LVDS clock pair.

Each channel supports transmit clock frequency ranges from 35 MHz to 112 MHz, which provides a throughput of up to 784 Mbps on each data output and up to 112 MHz on the input. When using both channels, they each operate at the same frequency each carrying a portion of the data. The maximum pixel rate is increased to 224 MHz but may be limited to less than that due to restrictions elsewhere in the circuit.

The LVDS Port Enable bit enables or disables the entire LVDS interface. When the port is disabled, it will be in a low power state. Once the port is enabled, individual driver pairs will be disabled based on the operating mode. Disabled drivers can be powered down for reduced power consumption or optionally fixed to forced 0's output.

LVDS Pair States

The LVDS pairs can be put into one of the following five states: powered down tri-state, powered down Zero Volts, common mode, send zeros, or active. When in the active state, several data formats are supported. When in powered down state, the circuit enters a low power state and drives out 0 V or tristates on both the output pins for the entire channel. The common mode tri-state is both pins of the pair set to the common mode voltage. When in the send zeros state, the circuit is powered up but sends only zero for the pixel color data regardless what the actual data is with the clock lines and timing signals sending the normal clock and timing data.

Single Channel versus Dual Channel Mode

Both single channel and dual channel modes are available to allow interfacing to either single or dual channel panel interfaces. This LVDS port can operate in single channel or dual channel mode. Dual channel mode uses twice the number of LVDS pairs and transfers the pixel data at twice the rate of the single channel. In general, one channel will be used for even pixels and the other for odd pixel data.

The first pixel of the line is determined by the display enable going active and that pixel will be sent out channel A. All horizontal timings for active, sync, and blank will be limited to be on two pixel boundaries in the two channel modes.

LVDS Channel Skew

When in dual channel mode, the two channels must meet the panel requirements with respect to the inter channel skew.

SSC Support

The GMCH is designed to tolerate 0.5%, 1.0%, and 2.5% down/center spread at a modulation rate from 30-50 kHz triangle. An external SSC clock synthesizer can be used to provide the 48/66-MHz reference clock into the GMCH Pipe B PLL.

Panel Power Sequencing

This section provides details for the power sequence timing relationship of the panel power, the backlight enable and the LVDS data timing delivery. In order to meet the panel power timing specification requirements, two signals, PANELVDDEN and PANELBKLTEN are provided to control the timing sequencing function of the panel and the backlight power supplies.

Panel Power Sequence States

A defined power sequence is recommended when enabling the panel or disabling the panel. The set of timing parameters can vary from panel to panel vendor, provided that they stay within a predefined range of values. The panel VDD power, the backlight on/off state and the LVDS clock and data lines are all managed by an internal power sequencer.

A requested power-up sequence is only allowed to begin after the power cycle delay time requirement is met.

Back Light Inverter Control

The GMCH offers integrated PWM for TFT panel Backlight Inverter control. Other methods of control are specified below:

- SMBus-based Backlight Brightness Control
- GMBus-based Backlight Brightness Control
- PWM – based Backlight Brightness Control
- DBL(Display Brightness Link) –to- VDL (Video Data Link) Power Sequencing.

Concurrent and Simultaneous Display

The GMCH has two independent pipes, each with its own timing generator and dot clock, and thus is able to support two displays concurrently. Windows 98* and Windows 2000* have enabled support for multi-monitor display. There are two types of multi-monitor solutions: concurrent and simultaneous.

Concurrent displays different data on two screens whereas simultaneous displays the same information on both displays. The GMCH also supports a combination of concurrent and simultaneous displays.

The pin out of the LVDS connector J4 can be seen on *Table A27*, the pin out of the LVDS Backlight connector J5 can be seen on *Table A26* and the pin out of the VGA connector J3 can be seen on *Table A18*.

User's Notes:

MN-GMEEP-01