


# VISIONETICS INTERNATIONAL VIGA+

Category	Video
Video Types Supported	XVGA
Video Processor	Unidentified
Highest Resolution Supported	1024 x 768
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	2MB

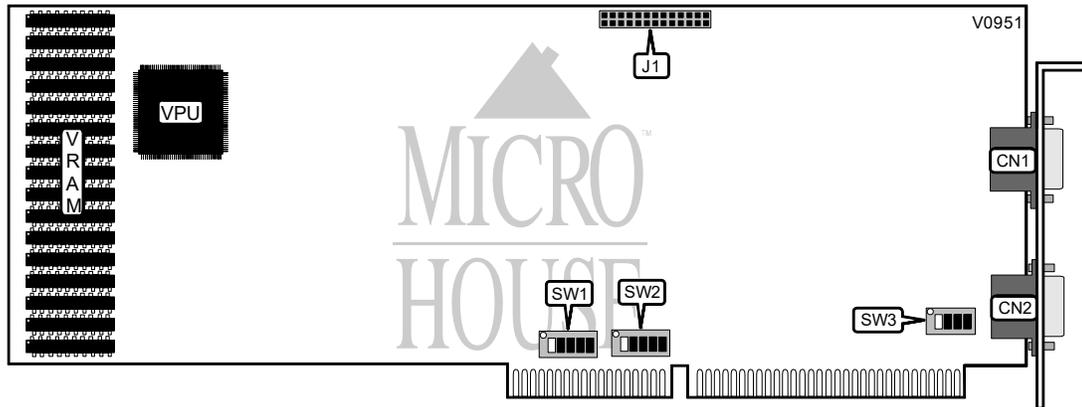

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VGA feature connector	J1
15-pin analog video port	CN2		

VIDEO OUTPUT SELECTION				
Setting	SW3/1	SW3/2	SW3/3	SW3/4
H-synch/V-synch	On	Off	On	Off
S-video	Off	On	Off	On

INTERRUPT SELECTION				
IRQ	SW2/1	SW2/2	SW2/3	SW2/4
í Disabled	Off	Off	Off	Off
3	On	Off	Off	Off
7	Off	On	Off	Off
10	Off	Off	On	Off
15	Off	Off	Off	On

SHARED INTERRUPT SELECTION	
Setting	SW2/5
í Disabled	Off
Enabled	On

Continued on next page...

VISIONETICS INTERNATIONAL  
VIGA+

...continued from previous page

BASE I/O ADDRESS SELECTION			
Address	S V1/1	S V1/2	S V1/3
220h	On	Off	On
200h	On	On	On
210h	On	On	Off
230h	On	Off	Off
240h	Off	On	On
250h	Off	On	Off
260h	Off	Off	On
270h	Off	Off	Off

BASE I/O ADDRESS MODE SELECTION	
Mode	SW1/4
Non - contiguous	On
Contiguous	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/5	Off