


# ICL GA2, GA2I

Category	Video
Video Types Supported	XVGA
Video Processor	ATI 68800
Highest Resolution Supported	1280 x 1024
Data Bus Type	16-bit ISA
Memory Type	VRAM
Maximum Onboard Memory	2MB

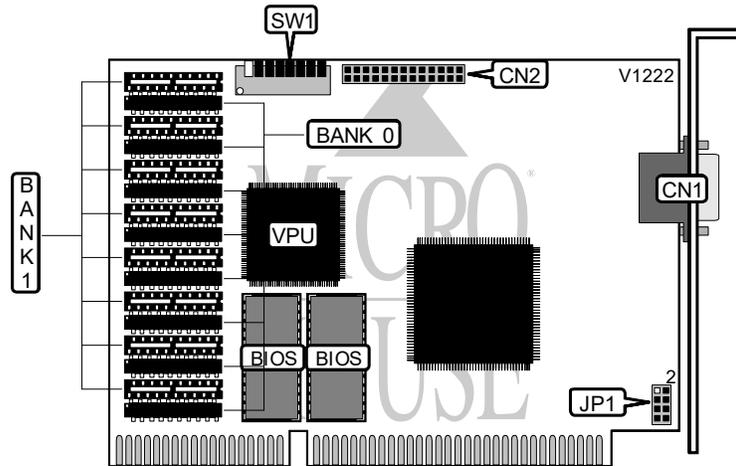

CONNECTIONS			
Port	Location	Purpose	Location
15-pin analog video port	CN1	VGA pass-through connector	CN2

ROM ADDRESS SELECTION								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
1C000h	Off	Off	On	On	Off	Off	On	Off
C8000h	Off	Off	Off	On	Off	Off	On	Off
CA000h	Off	On	Off	On	Off	Off	On	Off
D0000h	Off	Off	Off	Off	On	Off	On	Off
D4000h	Off	Off	On	Off	On	Off	On	Off
D8000h	Off	Off	Off	On	On	Off	On	Off

Note: The settings above are for use in a dual-board system. If this is the only video board installed, set SW1/1 through SW1/8 to Off.

Continued next page...

ICL  
GA2, GA2I

... continued from previous page.

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JP1	Pins 1 & 2 closed

VRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(8) 256K x 4	None
2MB	(8) 256K x 4	(8) 256K x 4