


SIIG, INC.  
DASH 28.8I FAX/MODEM INTERNAL

**Modem Type** Data (synchronous/asynchronous)/Fax  
**Maximum Data Rate** 28.8Kbps  
**Maximum Fax Rate** 14.4Kbps  
**Data Bus** 8-bit ISA  
**Fax Class** Class I & II  
**Data Modulation Protocol** Bell 103A/212A  
 ITU-T V.21, V.22, V.22bis, V.23, V.32, V.32bis, V.34  
 Rockwell V.FC  
**Fax Modulation Protocol** ITU-T V.17, V.21CH2, V.27ter, V.29  
**Error Correction/Compression** MNP5, V.42, V.42bis

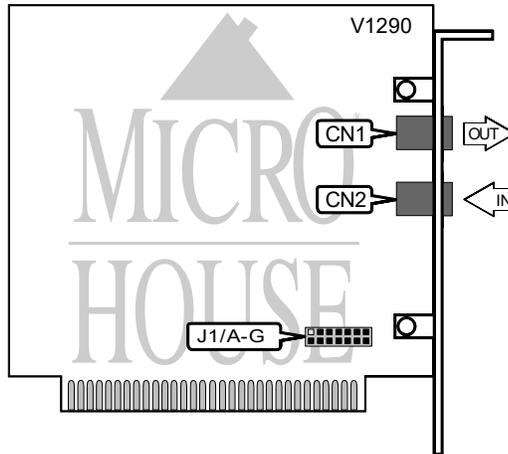

BASE I/O ADDRESS SELECTION				
Port	J1/D	J1/E	J1/F	J1/G
COM 1: (3F8h)	Closed	Open	Closed	Open
COM 2: (2F8h)	Open	Closed	Closed	Open
COM 3: (3E8h)	Closed	Open	Open	Closed
COM 4: (2E8h)	Open	Closed	Open	Closed

INTERRUPT SELECTION			
RQ	. 1/A	. 1/B	. 1/C
3	Closed	Open	Open
4	Open	Closed	Open
5	Open	Open	Closed

**Proprietary AT Command Set**

See document V1289 for a full command summary.