


# MAXTECH CORPORATION

## 14.4 FAXMODEM INTERNAL

<b>Card Type</b>	Modem(synchronous/asynchronous)
<b>Chip Set</b>	Unidentified
<b>Maximum Data Rate</b>	14.4Kbps
<b>Maximum Fax Rate</b>	14.4Kbps
<b>Data Bus</b>	8 bit ISA
<b>Fax Class</b>	Class I & II
<b>Data Modulation Protocol</b>	Bell 103A/212A
	ITU-T V.21, V.22, V.22bis, V.32, V.32bis
<b>Fax Modulation Protocol</b>	ITU-T V.17, V.21CH2, V.27ter, V.29
<b>Error Correction/Compression</b>	MNP5, V.42, V.42bis

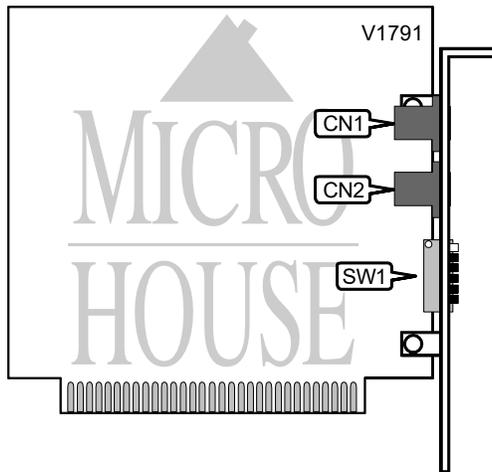

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

SERIAL PORT ADDRESS		
Setting	SW1/1	SW1/2
COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT				
Setting	SW1/3	SW1/4	SW1/5	SW1/6
2	On	Off	Off	Off
3	Off	On	Off	Off
4	Off	Off	On	Off
5	Off	Off	Off	On

### Proprietary AT Command Set

See document V1788 for a full command summary.