


MAXTECH

GM288I

Card Type	Fax, Modem (asynchronous)
Chip Set	Unidentified
Maximum Data Rate	28.8Kbps
Maximum Fax Rate	14.4Kbps
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A
	ITU-T V.22, V.22bis, V.32, V.32bis, V.34
Fax Modulation Protocol	ITU-T V.17, V.21CH2, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis

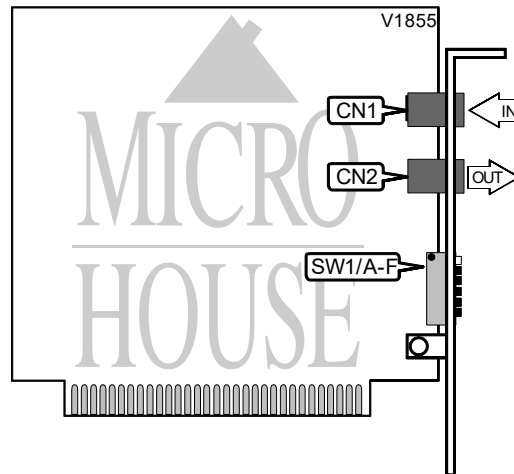

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

SERIAL PORT ADDRESS		
Setting	SW1/A	SW1/B
COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT				
Setting	SW1/C	SW1/D	SW1/E	SW1/F
2	On	Off	Off	Off
3	Off	On	Off	Off
4	Off	Off	On	Off
5	Off	Off	Off	On

Proprietary AT Command Set

See document V1852 for a full command summary.