


MITEL CORPORATION ISDN EXPRESS

Card Type ISDN TA
Chip Set Unidentified
Maximum Data Rate 64Kbps x 24, 64Kbps x 30, 1.544Mbps, 2.048Mbps
Data Bus 8-bit ISA
ISDN Modulation Protocol V.110, 1TR6, DSS1

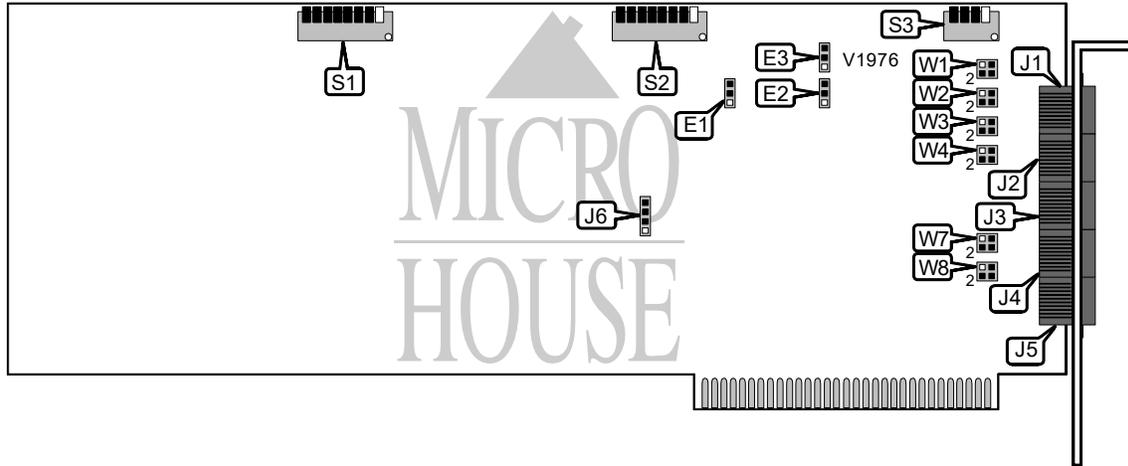

CONNECTIONS			
Function	Label	Function	Label
T1 line in	J1	ISDN S-interface in	J4
E1 line in	J2	Digital telephone	J5
ISDN U-interface in	J3	Speakerphone	J6

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
<input type="checkbox"/> Factory configured - do not alter	S1/8	N/A
<input type="checkbox"/> Factory configured - do not alter	S2/8	N/A
<input type="checkbox"/> Factory configured - do not alter	S3/4	On

BASE I/O ADDRESS				
Setting	Board Number	S3/1	S3/2	S3/3
<input type="checkbox"/> 0300h	0	On	On	On
2300h	1	On	On	Off
4300h	2	On	Off	On
6300h	3	On	Off	Off
8300h	4	Off	On	On
A300h	5	Off	On	Off
C300h	6	Off	Off	On
E300h	7	Off	Off	Off

T1 LINE LENGTH							
Setting	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6	S1/7
0'-150'	Closed	Open	Open	Open	Open	Open	Open
150'-450'	Open	Closed	Open	Closed	Open	Closed	Open
450'-655'	Open	Open	Closed	Open	Closed	Open	Closed

Continued on next page . . .

MITEL CORPORATION ISDN EXPRESS

. . . continued from previous page

E1 LINE LENGTH							
Setting	S2/1	S2/2	S2/3	S2/4	S2/5	S2/6	S2/7
0'-150'	Closed	Open	Open	Open	Open	Open	Open
150'-450'	Open	Closed	Open	Closed	Open	Closed	Open
450'-655'	Open	Open	Closed	Open	Closed	Open	Closed

LINE EXTENDER CIRCUIT			
Setting	E1	E2	E3
Enabled	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
Disabled	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

T1 WIRE PAIRS		
Setting	W1	W2
í Normal	Pins 1 & 2, 3 & 4 closed	Pins 1 & 2, 3 & 4 closed
Reversed	Pins 1 & 3, 2 & 4 closed	Pins 1 & 3, 2 & 4 closed

E1 WIRE PAIRS		
Setting	W3	W4
í Normal	Pins 1 & 2, 3 & 4 closed	Pins 1 & 2, 3 & 4 closed
Reversed	Pins 1 & 3, 2 & 4 closed	Pins 1 & 3, 2 & 4 closed

S-INTERFACE WIRE PAIRS		
Setting	W7	W8
í Normal	Pins 1 & 2, 3 & 4 closed	Pins 1 & 2, 3 & 4 closed
Reversed	Pins 1 & 3, 2 & 4 closed	Pins 1 & 3, 2 & 4 closed