


# SIIG, INC. AURORA 4000 PCI

<b>Card Type</b>	Video
<b>Video Chip Set</b>	S3 Trio64V+
<b>Maximum Video Memory</b>	4MB EDO DRAM
<b>I/O Options</b>	VESA feature connector, Local Peripheral Bus
<b>Data Bus</b>	32-bit PCI
<b>Video Types Supported</b>	XVGA
<b>Highest Resolution Supported</b>	1600 x 1200

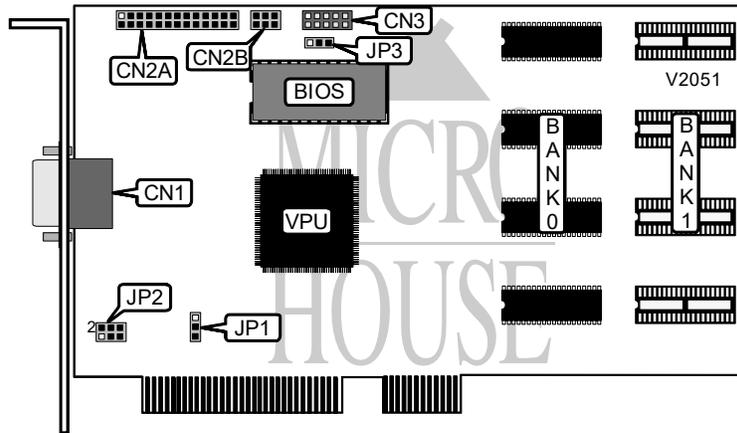

CONNECTIONS			
Function	Label	Function	Label
VGA port - 15-pin	CN1	LPB extension to VESA connector	CN2B
VESA feature connector	CN2A	Unidentified	CN3

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Board does not use IRQ2/9	JP1	Pins 2 & 3 closed	
Board uses IRQ2/9	JP1	Pins 1 & 2 closed	
Board does not use IRQ2/9	JP3	Pins 2 & 3 closed	
Board uses IRQ2/9	JP3	Pins 1 & 2 closed	

DRAM		
Size	Bank 0	Bank 1
2MB	(4) 256K x 16	NONE
4MB	(4) 256K x 16	(4) 256K x 16

DDC (PLUG-AND-PLAY)	
Setting	JP2
Enabled	Pins 1 & 3, 2 & 4 closed
Disabled	Pins 3 & 5, 4 & 6 closed