


MITEL CORPORATION SINGLE T1

Card Type T1 DSU
Chip Set Mitel
I/O Options MVIP bus
Maximum Transfer Rate 1.544Mbps
Data Bus 16-bit ISA

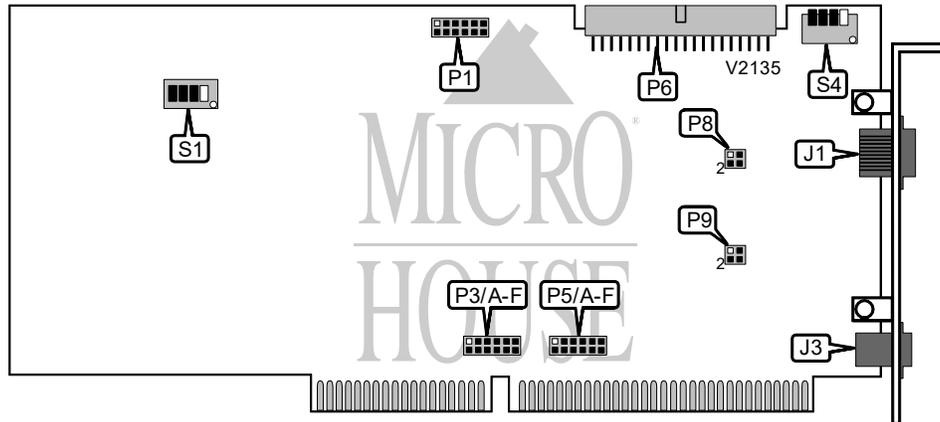

CONNECTIONS			
Function	Label	Function	Label
T1 line 1	J1	MVIP bus	P6
Handset	J3		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í IRQ driver terminated	P3/A	Closed	
IRQ driver not terminated	P3/A	Open	
í PMAC enabled	SW 1/4	Off	
PMAC disabled	SW 1/4	On	
í Factory configured - do not alter	P1/E	N/A	
í Factory configured - do not alter	P1/F	N/A	

Continued on next page . . .

MITEL CORPORATION SINGLE T1

. . . continued from previous page

BASE I/O ADDRESS					
Setting	S4/1	S4/2	S4/3	S4/4	
0200h	On	On	On	Off	
0300h	On	On	On	On	
2200h	On	On	Off	Off	
2300h	On	On	Off	On	
4200h	On	Off	On	Off	
4300h	On	Off	On	On	
6200h	On	Off	Off	Off	
6300h	On	Off	Off	On	
8200h	Off	On	On	Off	
8300h	Off	On	On	On	
A200h	Off	On	Off	Off	
A300h	Off	On	Off	On	
C200h	Off	Off	On	Off	
C300h	Off	Off	On	On	
E200h	Off	Off	Off	Off	
E300h	Off	Off	Off	On	

INTERRUPT					
Setting	P3/B	P3/C	P3/D	P3/E	P3/F
IRQ2/9	Open	Open	Open	Open	Open
IRQ3	Open	Open	Open	Open	Open
IRQ4	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Open	Open
IRQ6	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Closed
IRQ11	Open	Open	Open	Closed	Open
IRQ12	Open	Open	Closed	Open	Open
IRQ14	Closed	Open	Open	Open	Open
IRQ15	Open	Closed	Open	Open	Open

INTERRUPT (CON'T)						
Setting	P5/A	P5/B	P5/C	P5/D	P5/E	P5/F
IRQ2/9	Open	Open	Open	Open	Open	Closed
IRQ3	Closed	Open	Open	Open	Open	Open
IRQ4	Open	Closed	Open	Open	Open	Open
IRQ5	Open	Open	Closed	Open	Open	Open
IRQ6	Open	Open	Open	Closed	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open
IRQ10	Open	Open	Open	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open
IRQ14	Open	Open	Open	Open	Open	Open
IRQ15	Open	Open	Open	Open	Open	Open

Continued on next page . . .

MITEL CORPORATION SINGLE T1

. . . continued from previous page

T1 WIRE PAIRS		
Setting	P8	P9
í Normal	Pins 1 & 2, 3 & 4 closed	Pins 1 & 2, 3 & 4 closed
Reversed	Pins 1 & 3, 2 & 4 closed	Pins 1 & 3, 2 & 4 closed

LINE LENGTH			
Setting	S1/1	S1/2	S1/3
0'-133'	Off	Off	On
133'-266'	On	On	Off
266'-399'	Off	On	Off
399'-533'	On	Off	Off
533'-655'	Off	Off	Off

ISDN LINE TERMINATION				
Setting	P1/A	P1/B	P1/C	P1/D
í Terminated	Closed	Closed	Closed	Closed
Not terminated	Open	Open	Open	Open