


EICON TECHNOLOGY CORPORATION

EICONCARD HSI/PC 1MB

Card Type	Serial X.25
Processor	68000 (exact location unidentified)
Processor Speed	16MHz
Maximum Onboard Memory	1MB RAM
I/O Options	Serial port
Data Bus	16-bit ISA
Error Correction/Compression	Generic Lempel-Ziv

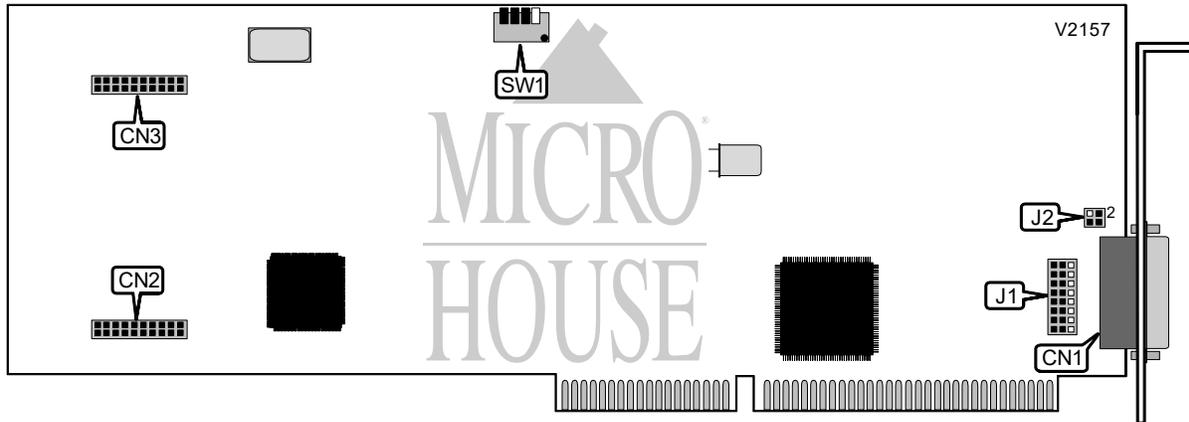

CONNECTIONS			
Function	Label	Function	Label
V.24, V.35, or X.21 port	CN1	Compression daughterboard headers	CN2 & CN3
Note: CN1 is a 3-row DB-26 connector. Standard port configurations are provided by included adapter cables.			

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í V.24 or V.35 interface for port 1	J1	Pins 2 & 3 closed	
X.21 interface for port 1	J1	Pins 1 & 2 closed	
í Electrical ground connected to signal ground	J2	Pins 1 & 2 closed	
Electrical ground not connected to signal ground	J2	Pins 3 & 4 closed	
í Card will use primary I/O address	SW1/1	Off	
Card will use secondary I/O address	SW1/1	On	
Note: A single-block jumper is provided for J1. It closes all pins 1 & 2 or all pins 2 & 3 simultaneously.			

BASE I/O ADDRESS				
Primary	Secondary	SW1/2	SW1/3	SW1/4
278h	678h	Off	Off	Off
280h	680h	Off	Off	On
378h	778h	Off	On	Off
í 380h	780h	Off	On	On
380h	780h	On	Off	Off
388h	788h	On	Off	On
390h	790h	On	On	Off
398h	798h	On	On	On
Note: If a card is set to use a secondary address, no other card in the system may be set to its associated primary address except for another EiconCard.				