


# EICON TECHNOLOGY CORPORATION

## EICONCARD/PC 1MB

<b>Card Type</b>	Serial X.25
<b>Processor</b>	68008 (exact location unidentified)
<b>Processor Speed</b>	10MHz
<b>Maximum Onboard Memory</b>	1MB RAM
<b>I/O Options</b>	Serial port
<b>Data Bus</b>	8-bit ISA

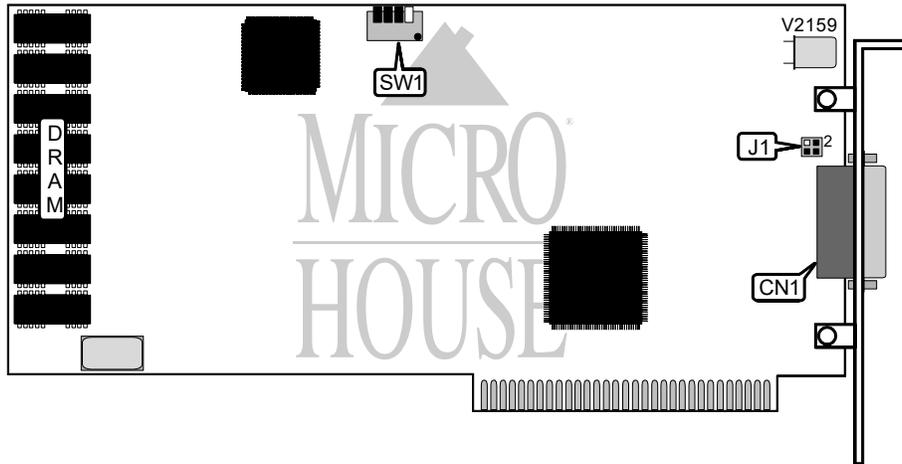

CONNECTIONS	
Function	Label
V.24, V.28, or X.21 port	CN1
<b>Note:</b> V.28 and X.21 port configurations are provided by included adapter cables.	

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Electrical ground connected to signal ground	J1	Pins 1 & 2 closed
Electrical ground not connected to signal ground	J1	Pins 3 & 4 closed
í Card will use primary I/O address	SW1/1	Off
Card will use secondary I/O address	SW1/1	On

BASE I/O ADDRESS				
Primary	Secondary	SW1/2	SW1/3	SW1/4
278h	678h	Off	Off	Off
280h	680h	Off	Off	On
378h	778h	Off	On	Off
í 380h	780h	Off	On	On
380h	780h	On	Off	Off
388h	788h	On	Off	On
390h	790h	On	On	Off
398h	798h	On	On	On
<b>Note:</b> If a card is set to use a secondary address, no other card in the system may be set to its associated primary address except for another EiconCard.				