


ACTIX SYSTEMS, INC. GRAPHICS ENGINE DISPLAY ACCELERATOR

Card Type	Video card
Video Chip Set	Unidentified
Highest Resolution Supported	1024 x 768
Maximum Video Memory	1MB VRAM
Data Bus	16-bit ISA
Video Types Supported	XVGA

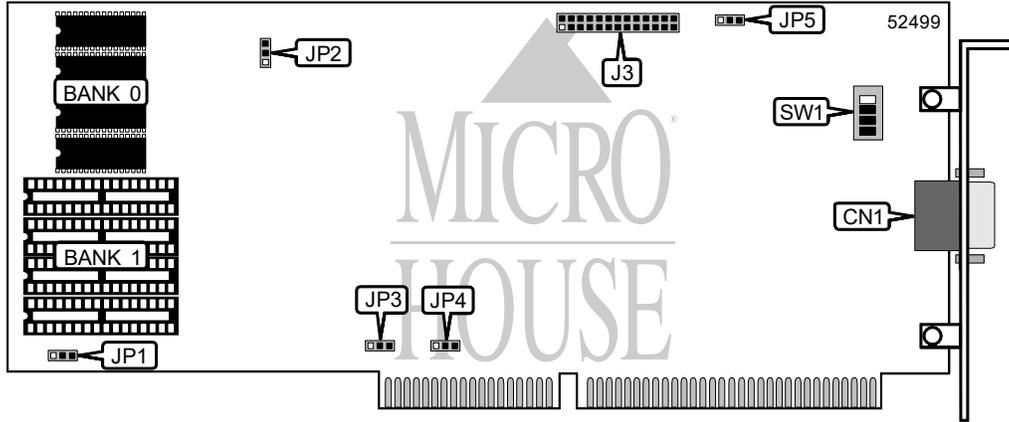

CONNECTIONS	
Function	Label
15-pin video analog port	CN1
Feature connector	J3

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í 512KB VRAM installed	JP1	Pins 1 & 2 closed	
1MB VRAM installed	JP1	Pins 2 & 3 closed	
í Engine speed 70Mhz	JP2	Pins 2 & 3 closed	
Engine Speed 55Mhz	JP2	Pins 1 & 2 closed	
IRQ9 enabled	JP3	Pins 1 & 2 closed	
IRQ9 disabled	JP3	Pins 2 & 3 closed	
í Factory configured - do not alter	JP4	Unidentified	
MIDI option enabled	JP5	Pins 1 & 2 closed	
Sense option enabled	JP5	Pins 2 & 3 closed	
í Zero wait states disabled	SW 1/3	Off	
Zero Wait states enabled	SW 1/3	On	
í 8 bit Bios	SW 1/4	On	
8 bit Bios	SW 1/4	Off	

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(4) 128K x 8	None
1MB	(4) 128K x 8	(4) 128K x 8

Continued on next page...

ACTIX SYSTEMS, INC. GRAPHICS ENGINE DISPLAY ACCELERATOR

Continued from previous page.

DISPLAY CONFIGURATION				
Display	Horizontal Frequency	Refresh at 1024x768	SW1/1	SW1/2
VGA, Super VGA	31.5, 35.5 KHz	43.5 Hz	Off	Off
Multi-Sync, 38 KHz	30-38 KHz	43.5 Hz	Off	On
Multi-Sync, 48 KHz	30-48 KHz	60 Hz	On	Off
Multi-Sync, 57 KHz	30-57 KHz	72 Hz	On	On