


DIALOGIC CORPORATION GAMMAFAX CPD

Card Type	Fax
Processor	80C188
Processor Speed	10MHz
Chipset	Unidentified
Maximum Fax Rate	9600bps
Fax Modulation	ITU-T V.27ter, V.29
Fax Class	N/A
Line Type	DID
Data Bus	8-bit ISA
Card Size	Full height, full length

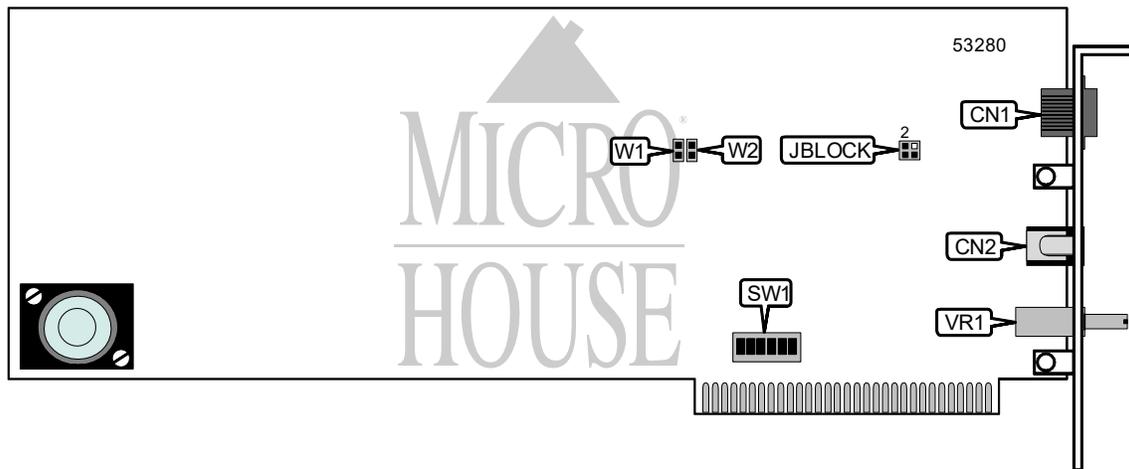

CONNECTIONS			
Function	Label	Function	Label
DID line out	CN1	Volume control	VR1
48V DC power in	CN2		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í Line polarity normal	JBLOCK	Pins 1 & 2, 3 & 4 closed	
í Line polarity reversed	JBLOCK	Pins 1 & 3, 2 & 4 closed	
í Factory configured - do not alter	SW1/4	On	
í Factory configured - do not alter	SW1/5	On	

LINE TYPE SELECTION		
Setting	W1	W2
í Permissive	Open	Closed
í Programmable	Closed	Open

Continued on next page. . .

DIALOGIC CORPORATION
 GAMMAFAX CPD

. . . continued from previous page

BASE I/O ADDRESS SELECTION					
Setting	Channel	SW1/1	SW1/2	SW1/3	SW1/6
100h	8	Off	Off	Off	On
104h	9	On	Off	Off	On
108h	10	Off	On	Off	On
10Ch	11	On	On	Off	On
110h	12	Off	Off	On	On
114h	13	On	Off	On	On
118h	14	Off	On	On	On
11Ch	15	On	On	On	On
150h	6	Off	On	On	Off
160h	7	On	On	On	Off
250h	3	On	On	Off	Off
260h	4	Off	Off	On	Off
270h	5	On	Off	On	Off
i 350h	0	Off	Off	Off	Off
360h	1	On	Off	Off	Off
370h	2	Off	On	Off	Off