


# EQUINOX SYSTEMS, INC.

## SST-161

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial port (16 RS-232)
Data Bus	16-bit ISA
Card Size	Half-length, half-height card

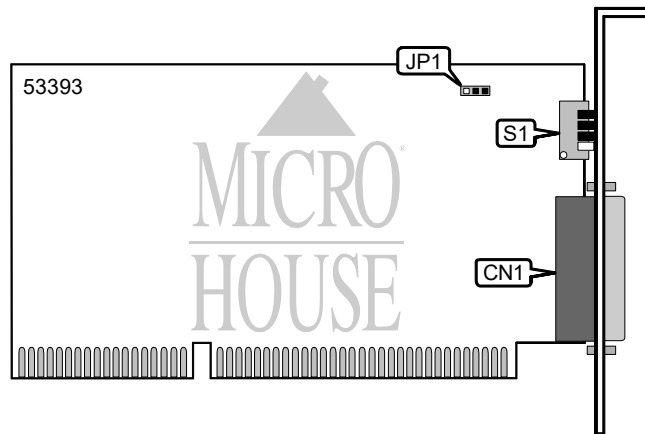

CONNECTIONS	
Function	Label
Serial ports via DB-25 connector	CN1
Note: There are two connector panels for the SST-161. The first has 16 male DB-25 connectors and the second has 16 RJ-45 connectors.	

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Plug and Play enabled	JP1	Pins 1 & 2 closed
Plug and Play disabled	JP1	Pins 2 & 3 closed

BASE I/O ADDRESS SELECTION				
Setting	S1/1	S1/3	S1/4	S1/2
200h	Open	Open	Open	Open
220h	Closed	Open	Open	Open
240h	Open	Closed	Open	Open
260h	Closed	Closed	Open	Open
280h	Open	Open	Closed	Open
2A0h	Closed	Open	Closed	Open
2C0h	Open	Closed	Closed	Open
2E0h	Closed	Closed	Closed	Open
300h	Open	Open	Open	Closed
320h	Closed	Open	Open	Closed
340h	Open	Closed	Open	Closed
360h	Closed	Closed	Open	Closed
380h	Open	Open	Closed	Closed
3A0h	Closed	Open	Closed	Closed
3C0h	Open	Closed	Closed	Closed
3E0h	Closed	Closed	Closed	Closed