


# AST RESEARCH, INC. FOUR PORT

<b>Card Type</b>	Serial
<b>Chipset</b>	Unidentified
<b>I/O Options</b>	Serial ports (4)
<b>Data Bus</b>	8-bit ISA
<b>Card Size</b>	Full height, half length

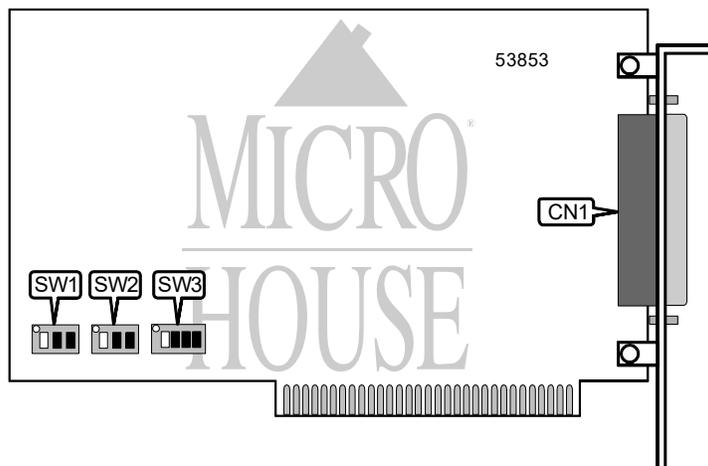

CONNECTIONS	
Function	Label
Serial ports via DB-37 port	CN1
Note: Standard DB-25 serial ports are provided on an included adapter cable.	

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Interrupt sharing disabled	SW3/3	On
Interrupt sharing enabled	SW3/3	Off
Factory configured - do not alter	SW3/4	Off

INTERRUPT SELECTION						
Setting	SW1/1	SW1/2	SW1/3	SW2/1	SW2/2	SW2/3
2	On	Off	Off	Off	Off	Off
3	Off	On	Off	Off	Off	Off
4	Off	Off	On	Off	Off	Off
5	Off	Off	Off	On	Off	Off
6	Off	Off	Off	Off	On	Off
7	Off	Off	Off	Off	Off	On

ADDRESS SELECTION						
Port 1	Port 2	Port 3	Port 4	Control	SW3/1	SW3/2
1A0h	1A8h	1B0h	1B8h	1BFh	Off	Off
2A0h	2A8h	2B0h	2B8h	2BFh	Off	On
3F8h (COM1:)	2F8h (COM2:)	1B0h	1B8h	1BFh	On	Off
3F8h (COM1:)	2F8h (COM2:)	2B0h	2B8h	2BFh	On	On