



Chapter 5: Jumper Settings
STANDARD MICROSYSTEMS CORPORATION
ETHERCARD ELITE ULTRA SMC8216C

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair AUI Transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

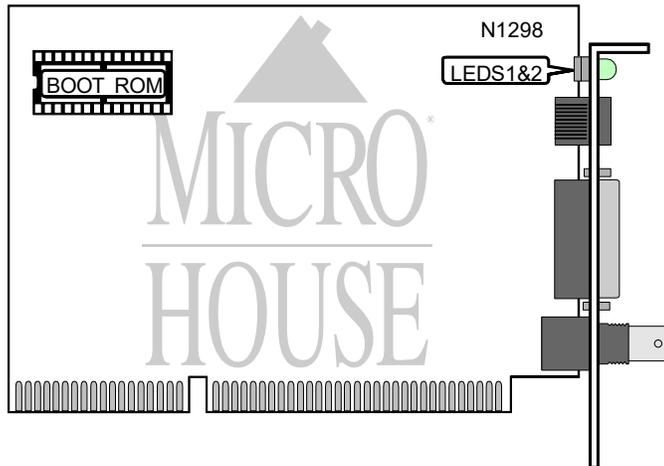

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
STANDARD MICROSYSTEMS CORPORATION
ETHERCARD ELITE ULTRA SMC8216C

... continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Amber	Blinking	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received