



**Chapter 5: Jumper Settings**  
**STANDARD MICROSYSTEMS CORPORATION**  
**ETHERCARD ELITE ULTRA SMC8216T**

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Star  
**Wiring Type** Unshielded twisted pair  
**Boot ROM** Available

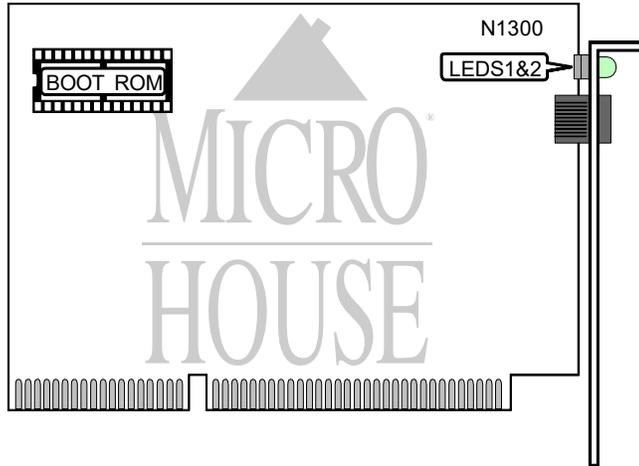

| DIAGNOSTIC LED(S) |       |          |  |
|-------------------|-------|----------|--|
| LED               | Color | Status   | Condition                              |
| LED1              | Green | On       | Network connection is good             |
| LED1              | Green | Off      | Network connection is broken           |
| LED2              | Amber | Blinking | Data is being transmitted/received     |
| LED2              | Amber | Off      | Data is not being transmitted/received |