


# SEALEVEL SYSTEMS, INC. DUAL SIO

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (2 RS-422 or RS-485)
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length, full-height

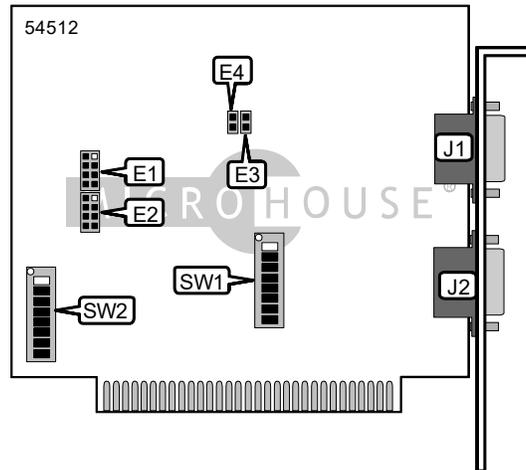

CONNECTIONS			
Function	Label	Function	Label
Serial Port 1	J1	Serial Port 2	J2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Port 1 enabled	SW1/8	On	
Port 1 disabled	SW1/8	Off	
Port 2 enabled	SW2/8	On	
Port 2 disabled	SW2/8	Off	
Port 1 enabled by RTS	E3	Closed	
Port 1 always enabled	E3	Open	
Port 2 enabled by RTS	E4	Closed	
Port 2 always enabled	E4	Open	

BASE I/O ADDRESS SELECTION PORT 1							
Setting	SW 1/1	SW 1/2	SW 1/3	SW 1/4	SW 1/5	SW 1/6	SW 1/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
2F8h	Off	On	Off	Off	Off	Off	Off
3E8h	Off	Off	Off	Off	Off	On	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
3F8h	Off						

Continued on next page . . .

# DUAL SIO

... continued from previous page

BASE I/O ADDRESS SELECTION PORT 2							
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6	SW2/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
í 2F8h	Off	On	Off	Off	Off	Off	Off
3E8h	Off	Off	Off	Off	Off	On	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
3F8h	Off						

SERIAL PORT 1 INTERRUPT SELECTION				
IRQ	E1/A	E1/B	E1/C	E1/D
IRQ2/9	Closed	Open	Open	Open
IRQ3	Open	Closed	Open	Open
í IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed

SERIAL PORT 2 INTERRUPT SELECTION				
IRQ	E1/A	E1/B	E1/C	E1/D
IRQ2/9	Closed	Open	Open	Open
í IRQ3	Open	Closed	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed