


SEALEVEL SYSTEMS, INC.

COMM + 2

Card Type	Serial card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Serial ports (2 RS-232, RS-422 or RS-485)
Hard Drives supported	None
Floppy drives supported	None
Data Bus	8-bit ISA
Card Size	Half-length, full-height

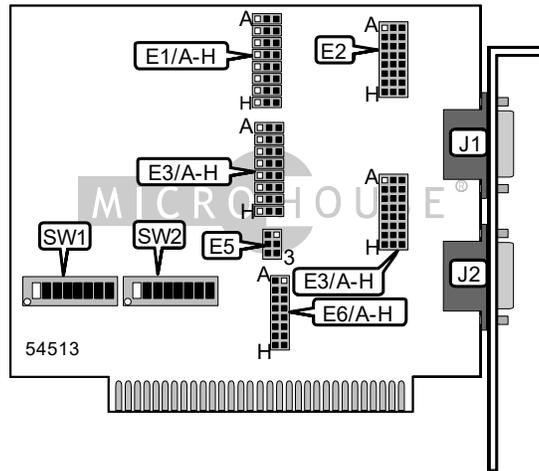

CONNECTIONS			
Function	Label	Function	Label
Serial Port 1	J1	Serial Port 2	J2

Continued on next page . . .

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Port 1 RS-232 receive data	E1/A	Pins 1 & 2 closed
Port 1 RS-422 receive data	E1/A	Pins 2 & 3 closed
Port 1 DSR enabled	E1/C	Pins 1 & 2 closed
Port 1 DSR active	E1/C	Pins 2 & 3 closed
Port 1 DCD enabled	E1/D	Pins 1 & 2 closed
Port 1 DCD active	E1/D	Pins 2 & 3 closed
Port 1 RI enabled	E1/E	Pins 1 & 2 closed
Port 1 RI active	E1/E	Pins 2 & 3 closed
Port 1 always enabled (RS-485)	E1/G	Pins 1 & 2 closed
Port 1 enabled by RTS (RS-485)	E1/G	Pins 2 & 3 closed
Port 1 100 ohm high impedance ground enabled	E1/H	Pins 1 & 2 closed
Port 1 direct ground enabled	E1/H	Pins 2 & 3 closed
Port 2 RS-232 receive data	E3/A	Pins 1 & 2 closed
Port 2 RS-422 receive data	E3/A	Pins 2 & 3 closed
Port 2 DSR enabled	E3/C	Pins 1 & 2 closed
Port 2 DSR active	E3/C	Pins 2 & 3 closed
Port 2 DCD enabled	E3/D	Pins 1 & 2 closed
Port 2 DCD active	E3/D	Pins 2 & 3 closed
Port 2 RI enabled	E3/E	Pins 1 & 2 closed
Port 2 RI active	E3/E	Pins 2 & 3 closed
Port 2 always enabled (RS-485)	E3/G	Pins 1 & 2 closed
Port 2 enabled by RTS (RS-485)	E3/G	Pins 2 & 3 closed
Port 2 100 ohm high impedance ground enabled	E3/H	Pins 1 & 2 closed
Port 2 direct ground enabled	E3/H	Pins 2 & 3 closed
i Port 1 enabled	SW1/8	On
Port 1 disabled	SW1/8	Off
i Port 2 enabled	SW2/8	On
Port 2 disabled	SW2/8	Off

BASE I/O ADDRESS SELECTION PORT 1							
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
2F8h	Off	On	Off	Off	Off	Off	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
3E8h	Off	Off	Off	Off	Off	On	Off
i 3F8h	Off						

BASE I/O ADDRESS SELECTION PORT 2							
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7
280h	Off	On	Off	On	On	On	On
2A0h	Off	On	Off	On	Off	On	On
2E8h	Off	On	Off	Off	Off	On	Off
í 2F8h	Off	On	Off	Off	Off	Off	Off
300h	Off	Off	On	On	On	On	On
328h	Off	Off	On	On	Off	On	Off
3E8h	Off	Off	Off	Off	Off	On	Off
3F8h	Off						

SERIAL PORT 1 INTERRUPT SELECTION				
IRQ	E6/A	E6/B	E6/C	E6/D
2/9	Closed	Open	Open	Open
3	Open	Closed	Open	Open
í 4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

SERIAL PORT 2 INTERRUPT SELECTION				
IRQ	E6/E	E6/F	E6/G	E6/H
2/9	Closed	Open	Open	Open
í 3	Open	Closed	Open	Open
4	Open	Open	Closed	Open
5	Open	Open	Open	Closed

SERIAL INTERRUPT MODE SELECTION PORT 1	
IRQ	E5
í Normal	Pins 4 & 5 closed
Shared Interrupt mode	Pins 5 & 6 closed

SERIAL INTERRUPT MODE SELECTION PORT 2	
IRQ	E5
í Normal	Pins 1 & 2 closed
Shared Interrupt mode	Pins 2 & 3 closed

PORT 1 TYPE SELECTION	
Mode	E2/A-H
RS-232 enabled	Pins 1 & 2 closed
RS-422 enabled	Pins 2 & 3 closed

PORT 2 TYPE SELECTION	
Mode	E4/A-H
RS-232 enabled	Pins 1 & 2 closed
RS-422 enabled	Pins 2 & 3 closed

Continued on next page . . .

SEALEVEL SYSTEMS, INC.
COMM + 2

. . . continued from previous page

CTS MODE SELECTION PORT 1		
Mode	E1/B	E1/F

CTS enabled	Pins 1 & 2 closed	Pins 1 & 2 closed
CTS active	Open	Pins 2 & 3 closed

CTS MODE SELECTION PORT 2		
Mode	E3/B	E3/F
CTS enabled	Pins 1 & 2 closed	Pins 1 & 2 closed
CTS active	Open	Pins 2 & 3 closed