


# UNIDENTIFIED KT-IDE PLUS-V2

Q4/93

**Data bus:** 16-bit, ISA  
**Size:** Half-length, full-height card  
**Hard drive supported:** Two IDE(AT) Interface drives  
**Floppy drives supported:** Two 360KB, 720KB, 1.2MB, or 1.44MB drives

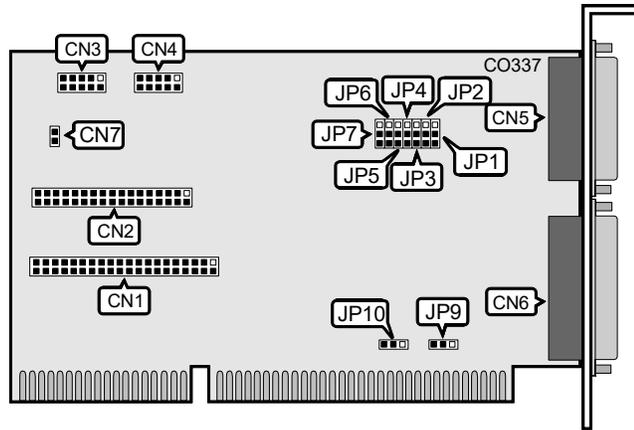

CONNECTIONS	
Function	Location
40-pin IDE(AT) Interface connector	CN1
34-pin control cable connection - floppy drive	CN2
10-pin serial port 2 - internal	CN3
10-pin serial port 1 - internal	CN4
15-pin game port - external	CN5
25-pin parallel port - external	CN6
2-pin connector - Drive Active LED	CN7

PARALLEL PORT CONFIGURATION		
LPT	Jumper JP1	Jumper JP2
LPT3 (278-27Fh)	pins 1-2 closed	pins 1-2 closed
LPT2 (378-37Fh)	pins 2-3 closed	pins 1-2 closed
LPT1 (3BC-3BFh)	pins 1-2 closed	pins 2-3 closed
Disabled	pins 2-3 closed	pins 2-3 closed

Continued on next page . . .

**UNIDENTIFIED  
KT-IDE PLUS-V2**

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	JP6	pins 1-2 closed
Floppy drive disabled		pins 2-3 closed
í Two floppy drives supported	JP7	pins 1-2 closed
í Factory configured - do not alter	JP7	pins 2-3 closed
í Factory configured - do not alter	JP9	unknown
í Factory configured - do not alter	JP10	unknown

SERIAL PORT CONFIGURATION				
CN4	CN3	Jumper JP3	Jumper JP4	Jumper JP5
COM1	COM2	pins 1-2 closed	pins 1-2 closed	pins 1-2 closed
COM2	COM1	pins 1-2 closed	pins 1-2 closed	pins 2-3 closed
COM1	Disabled	pins 1-2 closed	pins 2-3 closed	pins 1-2 closed
COM2	Disabled	pins 1-2 closed	pins 2-3 closed	pins 2-3 closed
Disabled	COM2	pins 2-3 closed	pins 1-2 closed	pins 1-2 closed
Disabled	COM1	pins 2-3 closed	pins 1-2 closed	pins 2-3 closed
Disabled	Disabled	pins 2-3 closed	pins 2-3 closed	pins 1-2 closed
Disabled	Disabled	pins 2-3 closed	pins 2-3 closed	pins 2-3 closed