


TWINHEAD INTERNATIONAL CORPORATION

CT-8490

| | |
|------------------------------|---------------------------|
| Card Type | Video card |
| Video Chip Set | Unidentified |
| Maximum Video Memory | Unidentified |
| Video Types Supported | Monochrome, CGA, EGA, VGA |
| Highest Resolution Supported | 800 x 600 |
| Data Bus | 8-bit ISA |

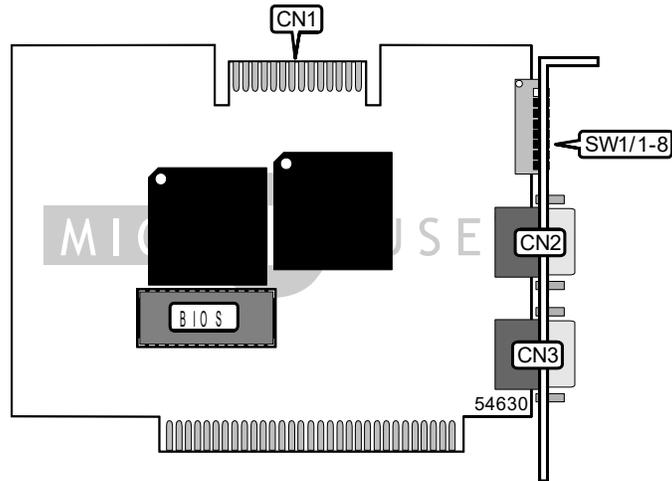

| CONNECTIONS | | | |
|-------------------------------|-------|---------------------------|-------|
| Function | Label | Function | Label |
| VGA feature connector | CN1 | 9-pin TTL video connector | CN3 |
| 15-pin Analog video connector | CN2 | | |

| USER CONFIGURABLE SETTINGS | | | |
|-----------------------------------|-------|----------|--|
| Function | Label | Position | |
| i CT-8490 is primary display card | SW1/5 | On | |
| CT-8490 is secondary display card | SW1/5 | Off | |

| MONITOR TYPE SELECTION | | | | |
|------------------------|-------|-------|-------|-------|
| Monitor | SW1/1 | SW1/2 | SW1/3 | SW1/4 |
| Monochrome | On | On | On | On |
| CGA | Off | On | On | On |
| EGA | On | Off | On | On |
| VGA | On | On | On | Off |
| Monochrome (PS/2) | Off | On | On | Off |
| MultiSync TTL | Off | Off | On | On |
| MultiSync analog | Off | On | On | Off |

| DISPLAY MODE SELECTION | | | |
|---------------------------------|-------|-------|-------|
| Setting | SW1/6 | SW1/7 | SW1/8 |
| Lock at monochrome display mode | On | Off | On |
| Lock at CGA display mode | Off | On | On |
| Lock at EGA display mode | On | On | Off |
| Lock at VGA display mode | On | On | Off |
| Lock at VGA display mode | On | On | Off |
| Set at auto switch | On | On | On |
| Set at auto switch | On | On | On |