


MOXA TECHNOLOGIES CO., LTD

C102H, C102HI, C102HIS, C102P

Card Type	Serial controller
Chip Set	Unidentified
I/O Options	Serial ports (2 RS-422/485)
Data Bus	16-bit ISA (EISA compatible)
Card Size	Full-height, Half-length card

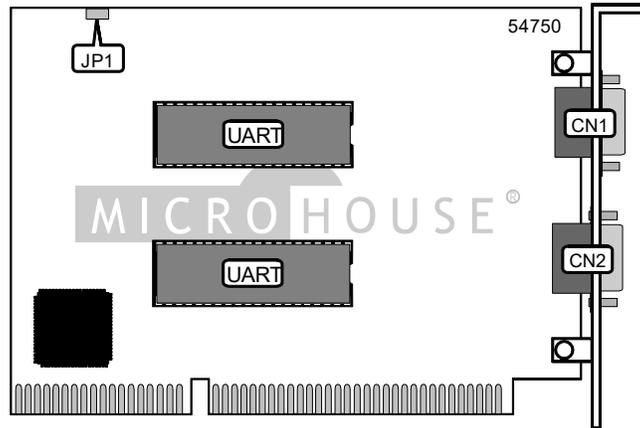

CONNECTIONS			
Function	Label	Function	Label
Serial Port 1	CN1	Serial Port 2	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
i CAP address 0x180 enabled	JP1	Open	
CAP address 0x180 disabled	JP1	Closed	
Note: When disabled CAP address is forced to 0xA700			

MISCELLANEOUS TECHNICAL NOTES
Note: Base I/O address and IRQ settings are configured via software written to EEPROM. Normally the default settings should be used unless another device cannot be configured to an address other than 0x180. If JP1 is shorted this will force the Configuration Access Port (CAP) to address 0xA700.