


# AVM COMPUTERSYSTEME ISDN-CONTROLLER A1

<b>Card Type</b>	ISDN
<b>Chip Set</b>	Unidentified
<b>I/O Options</b>	ISDN interface (RJ-45)
<b>ISDN Data Rate</b>	64Kbps x 2
<b>D-Channel Protocol</b>	DSS1, 1TR6, VN3/4, 5ESS, NI1, DMS-100, Austel, CT1
<b>B-Channel Protocol (Layer 2)</b>	X.75, HDLC, Transparent, V.120,
<b>B-Channel Protocol (Layer 3)</b>	Transparent, X.25, ISO 8208, X.31, T.70
<b>Error Correction/Compression</b>	Unidentified
<b>Data Bus</b>	16-bit ISA

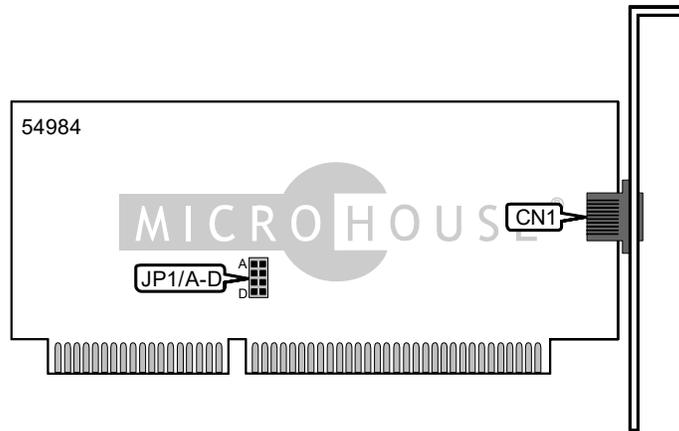

CONNECTIONS	
Function	Label
ISDN interface (RJ-45 connector)	CN1

BASE I/O ADDRESS SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
150h	Closed	Open	Open	Open
250h	Open	Closed	Open	Open
300h	Open	Open	Closed	Open
340h	Open	Open	Open	Closed
Plug & play	Open	Open	Open	Open