


UNIDENTIFIED SNB - C042

Data Bus 16-bit ISA
Card Size Half-height, half-length
Hard Drives Supported Two IDE(AT) devices
Floppy Drives Supported Two 360KB, 720KB, 1.2MB, or 1.44MB drives

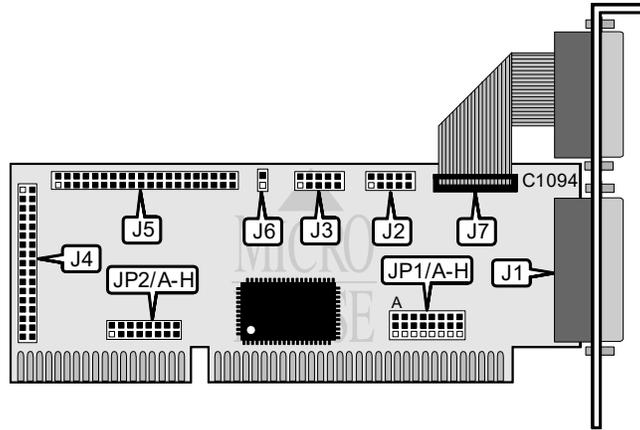

CONNECTIONS			
Function	Label	Function	Label
25-pin parallel port - external	J1	40-pin IDE(AT) connector	J5
10-pin serial port 1 - internal	J2	2-pin drive active LED	J6
10-pin serial port 2 - internal	J3	16-pin game port	J7
34-pin cable connector - floppy drive	J4		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í Floppy drive interface enabled	JP1/G	Pins 1 & 2 closed	
Floppy drive interface disabled	JP1/G	Pins 2 & 3 closed	
í IDE(AT) interface enabled	JP1/H	Pins 1 & 2 closed	
IDE(AT) interface disabled	JP1/H	Pins 2 & 3 closed	

SERIAL PORT 1 ADDRESS		
Setting	JP1/A	JP1/B
í 3F8h (COM1:)	Pins 1 & 2 closed	Pins 2 & 3 closed
3E8h (COM3:)	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

SERIAL PORT 1 INTERRUPT			
Setting	JP2/A	JP2/B	JP2/C
IRQ3	Open	Closed	Open
í IRQ4	Closed	Open	Open
IRQ5	Open	Open	Closed

Continued on next page. . .

UNIDENTIFIED
SNB-C042

. . . continued from previous page

SERIAL PORT 2 ADDRESS		
Setting	JP1/C	JP1/D
í 2F8h (COM2:)	Pins 1 & 2 closed	Pins 2 & 3 closed
2E8h (COM4:)	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

SERIAL PORT 2 INTERRUPT			
Setting	JP2/D	JP2/E	JP2/F
í IRQ3	Closed	Open	Open
IRQ4	Open	Closed	Open
IRQ5	Open	Open	Closed

PARALLEL PORT ADDRESS		
Setting	JP1/E	JP1/F
í 378h	Pins 1 & 2 closed	Pins 2 & 3 closed
278h	Pins 2 & 3 closed	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed	Pins 2 & 3 closed

PARALLEL PORT INTERRUPT		
Setting	JP2/G	JP2/H
IRQ5	Open	Closed
IRQ7	Closed	Open