


DIALOGIC CORPORATION

VFX/40ESC PLUS

Card Type	Voice processor card
Chip Set	Intel
Maximum Onboard Memory	Unidentified
I/O Options	RJ-11 jacks (4), 20-pin AEB connector, 26-pin PEB connector
Data Bus	16-bit ISA
Card Size	Full-length, full-height

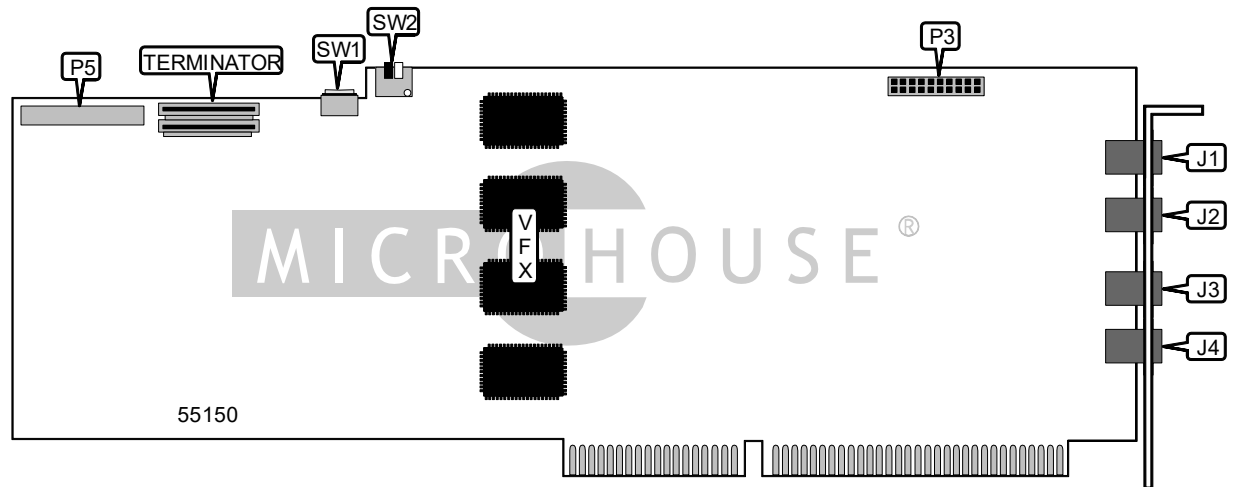

CONNECTIONS			
Function	Label	Function	Label
Channel 1 via RJ-11	J1	Channel 4 via RJ-11	J4
Channel 2 via RJ-11	J2	20-pin AEB connector	P3
Channel 3 via RJ-11	J3	26-pin PEB connector	P5

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Board ID selection	SW1	See note
í Hook switch set for on hook operation	SW2/1	Off
Hook switch set to off hook operation	SW2/1	On
í Board ID range set to 0 - 15	SW2/2	Off
Board ID range set to 16 - 31	SW2/2	On
Note: SW1 is a rotary switch used to determine the Board ID settings. The default Board ID setting is 0. SW1 is used in concurrence with SW2/2.		