


ADAPTEC, INC.

AHA-1522B

Card Type
 Hard Drives supported
 Floppy drives supported
 Data Bus
 Card Size

Hard drive controller card
 Up to 7 SCSI devices
 Two 360KB, 720KB, 1.2MB or 1.44MB
 16-bit ISA
 Three-quarter length, half-height card

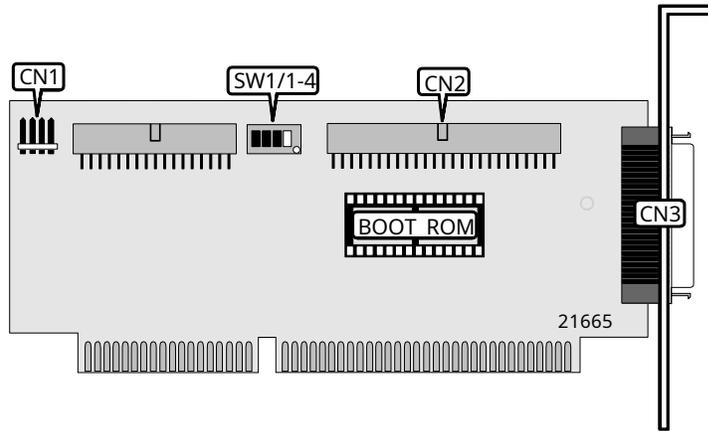

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	J1	50-pin SCSI connector - external	J4
34-pin floppy connector - internal	J2	50-pin SCSI connector - internal	J3

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/4	Unidentified

BIOS ADDRESS SELECTION			
Address	SW1/1	SW1/2	SW1/3
DC000-DFFFFh	Off	Off	Off
D8000-DBFFFh	On	Off	Off
D4000-D7FFFh	Off	On	Off
D0000-D3FFFh	On	On	Off
CC000-CFFFFh	Off	Off	On
C8000-CBFFFh	On	Off	On
Inactive	Off	On	On
BIOS PROM disabled	On	On	On

Note: Do not use the inactive setting in Legacy/Non-Plug and Play systems. If you disable the BIOS PROM, you must run SCSISelect to synchronize the host adapter's resource table with your new selection. Synchronization is automatically performed just by entering SCSISelect.