


JUMPER SETTINGS

PORTS SELECTION JP3

JUMPER	PINS SHORTED		FUNCTION
	1	2	
1 - 2 (1st serial)	A	A	*COM1 (3F8) selected
	B	A	COM3 (3E8) selected
	X	B	1st serial port disabled
3 - 4 (2nd serial)	A	A	*COM2 (2F8) selected
	B	A	COM4 (2E8) selected
	X	B	2nd serial port disabled
5 - 6 (Printer port)	A	A	*LPT1 (378) selected
	B	A	LPT2 (278) selected
	X	B	Printer port disabled
7 (Game port)	A B		*Game port enabled Game port disabled

PCB LAYOUT

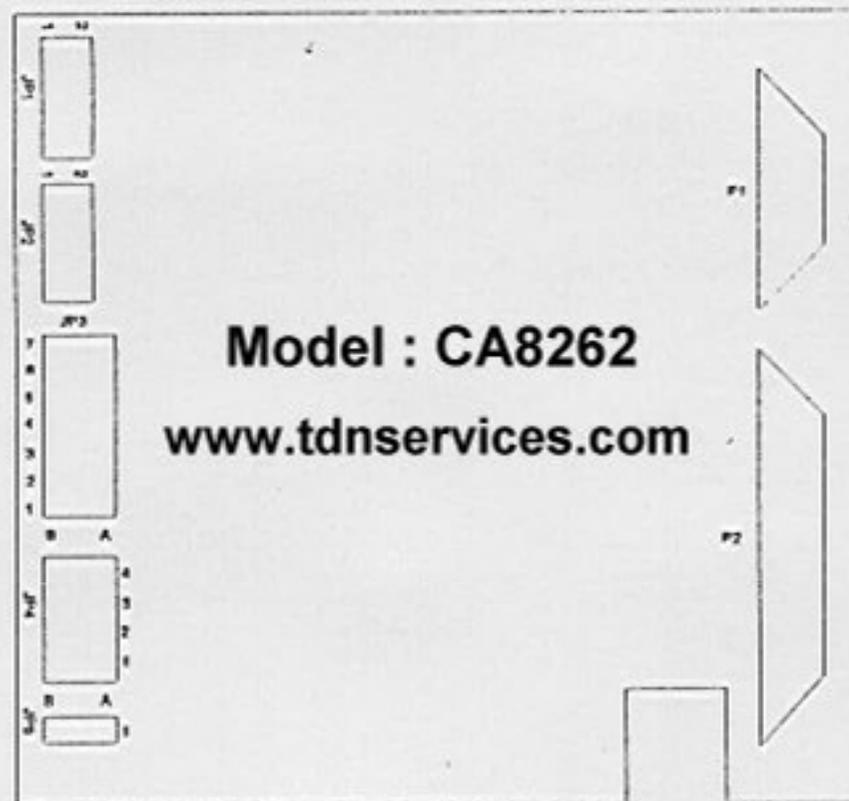

INTERRUPT LEVEL JP4 & JP5

PORT	JUMPER	PINS SHORTED	INTERRUPT LEVEL
Printer	JP5	1	IRQ5
		2	*IRQ7
1st Serial	JP4A	1	IRQ3
		2	*IRQ4
		3	IRQ5
		4	IRQ2
2nd Serial	JP4B	1	*IRQ3
		2	IRQ4
		3	IRQ5
		4	IRQ2

Remarks: "X" stands for don't care and "*" stands for the default setting

PIN ASSIGNMENTS

SERIAL PORT (JP1 & JP2)

SIGNAL NAME	PIN NO.	PIN ON CABLE
CN (IN)	1	8
RX (IN)	2	3
TX (OUT)	3	2
DTR (OUT)	4	20
SG	5	7
DSR (IN)	6	6
RTS (OUT)	7	4
CTS (IN)	8	5
RI (IN)	9	22