


UNKNOWN

E2000A-1

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus, Star
Wiring Type DIX transceiver via DB-15 port
 RG58A/U 50ohm coaxial
Boot ROM Available

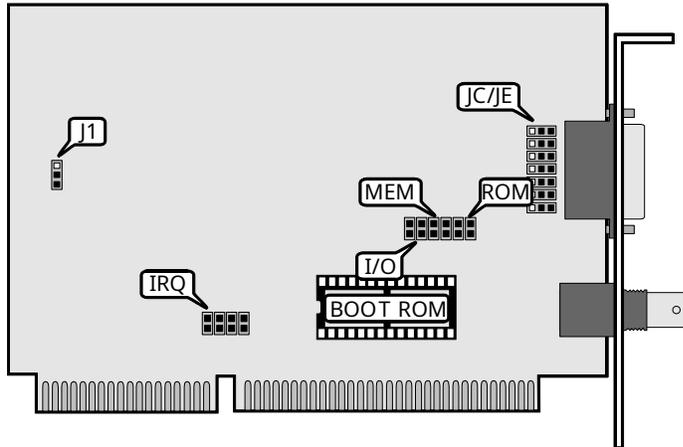

BASE MEMORY ADDRESS SELECT			
Address	MEM		
í C800h - CBFFh	Closed	Open	Closed
C000h - C3FFh	Closed	Closed	Closed
C400h - C7FFh	Open	Closed	Closed
CC00h - CFFFh	Open	Open	Closed
D000h - D3FFh	Closed	Closed	Open
D400h - D7FFh	Open	Closed	Open
D800h - DBFFh	Closed	Open	Open
DC00h - DFFFh	Open	Open	Open

BOOT ROM	
Setting	ROM
í Disabled	Open
Enabled	Closed

Continued from previous page. . .

UNKNOWN E2000A-1

... continued from previous page

CABLE TYPE							
Type	JC/JE						
í Thin	Pins 1 & 2						
Thick	Pins 2 & 3						

Note: All Pins designated should be in the closed position.

INTERRUPT SELECT				
IRQ	IRQ			
í IRQ3	Open	Closed	Open	Open
IRQ2	Closed	Open	Open	Open
IRQ4	Open	Open	Closed	Open
IRQ5	Open	Open	Open	Closed

I/O ADDRESS SELECT		
Address	I/O	
í 300h - 31Fh	Closed	Closed
320h - 33Fh	Open	Closed
340h - 35Fh	Closed	Open
360h - 37Fh	Open	Open

SYSTEM TYPE	
Type	J1
í All Other	Pins 1 & 2 closed
COMPAQ 286 portables, IBM PS/2 Model 30-286, C & T shipset systems	Pins 2 & 3 closed