


# CONTROL CORPORATION HOSTESS S

<b>Card Type</b>	I/O controller
<b>Chipset/Controller</b>	Texas Instruments (UART)
<b>I/O Options</b>	Serial ports (2)
<b>Maximum DRAM</b>	N/A

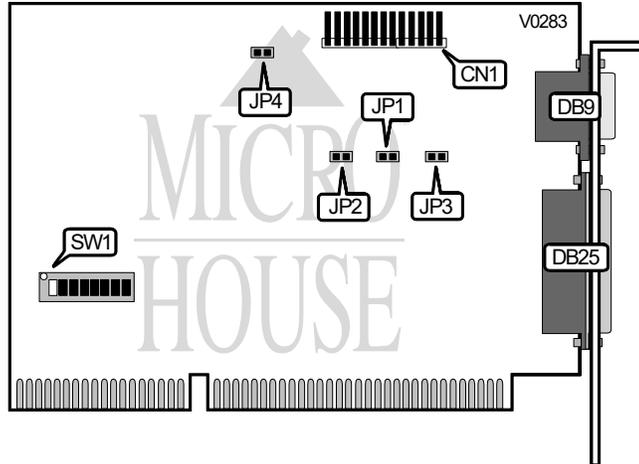

CONNECTIONS			
Purpose	Location	Purpose	Location
Optional second DB25 connector	CN1	9-pin serial connector	DB9
25-pin serial connector	DB25		

I/O ADDRESS SELECT			
Address	S V1/1	S V1/2	S V1/3
200h-207h	On	On	On
280h-287h	On	On	Off
2C0h-287h	On	Off	On
300h-307h	On	Off	Off
Reserved	Off	On	On
Reserved	Off	On	Off
Reserved	Off	Off	On

SERIAL PORT INTERRUPT SELECT					
IRQ	SW2/4	SW2/5	SW2/6	SW2/7	SW2/8
IRQ2	Off	Off	Off	Off	On
IRQ3	Off	Off	Off	On	Off
IRQ5	Off	Off	On	Off	Off
IRQ10	Off	On	Off	Off	Off
IRQ11	On	Off	Off	Off	Off

Continued on next page . . .

**CONTROL CORPORATION**  
**HOSTESS S**

... continued from previous page

LINE TO LINE TERMINATION SELECT		
Jumper	Setting	Meaning
JP1	Closed	Receive clock for port 1
JP2	Closed	Receive signal for port 1
JP3	Closed	Transmit clock for port 1
JP4	Closed	Receive signal for port 2

Note: The default position for the jumpers is open.