


# Products

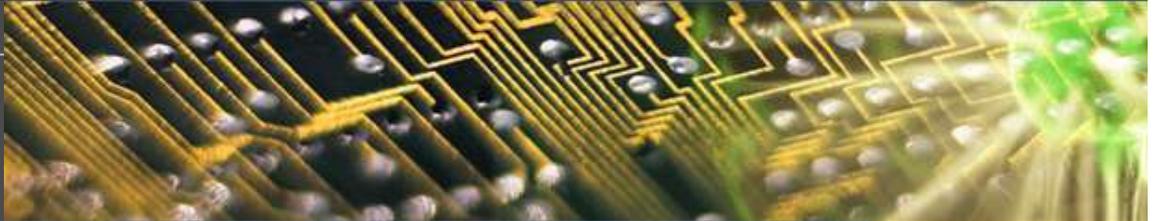

- Home
- Company
- Products
- Support
- Download
- Site Map

- Digital Surveillance System
- GV-1000
- GV-900
- GV-800
- GV-650
- GV-600
- GV-250

Licensed Plate Recognition

Central Monitoring Station

Hardware Accessories



**Live Demo**  
This demonstration is limited to 60 seconds  
User's ID: guest  
Password: not required



**DMIP Login**  
Remote viewing through Dynamic IP Server.



**HDD Calculator**  
"Terms of use"



**Bandwidth Calculator**  
▶ Center V2  
▶ WebCam

## GV-600 Video Capture Card



GV-600 BNC



GV-600 D-Type



### Specifications


Input Type	GV-600 BNC: BNC X 4
	GV-600 D-Type: DB15 X 2
Video Input(s)	4, 6, 8, 10, 12, 14, 16 Cams
Audio Input(s)	1 channel
Recording Rate	30fps (NTSC), 25fps (PAL).
Display Rate	30fps (NTSC), 25fps (PAL).
Video Resolution	320x240, 640x240, 640x480, 640x480 S/W
Compression Format	Wavelet, MPEG-4, GeoMPEG-4
<a href="#">GV-DSP Support</a>	Yes
<a href="#">GV-A16 Support</a>	Yes
<a href="#">GV-NET/IO Card Support</a>	Yes
Dimensions	GV-600 BNC: 132mm x 100mm
	GV-600 D-Type: 132mm x 100mm

**Note:** GV-600 is currently not compatible with VIA series chipset motherboard.

### System Requirements

OS Supported	Windows 2000 / Windows XP
CPU	Pentium III 800 (minimum)
RAM	256MB (minimum)
HDD	80GB (recommended)
VGA	nVIDIA GeForce2 MX200 32MB
DirectX	9.0 or above

### Accessories

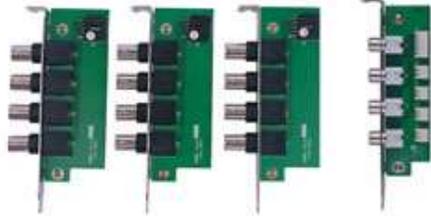

5-16 Cams BNC Video Extension Card  
& 4 ports Audio Extension Card



1-8 Cams Video/Audio Cable



9-16 Cams Video Cable