


# DIAMOND FLOWER, INC.

## DIO-200X

<b>Card Type</b>	Multi I/O card
<b>Chipset/Controller</b>	Unidentified
<b>I/O Options</b>	Clock, game port, parallel port, serial ports (2)
<b>Maximum DRAM</b>	N/A

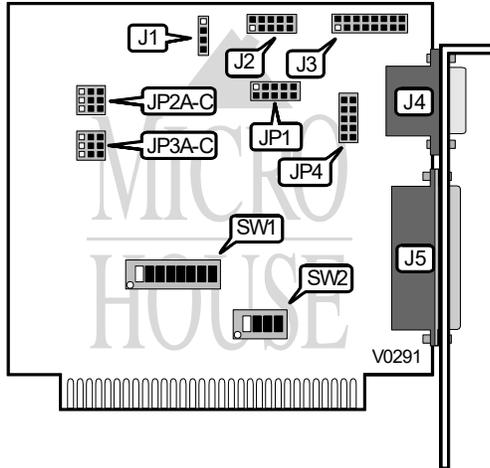

CONNECTIONS			
Purpose	Location	Purpose	Location
Clock/calender battery connector	J1	Serial port 1	J4
Serial port 2	J2	Parallel port	J5
Game port	J3		

SERIAL PORT CONFIGURATION			
Port 1 (J4)	Port 2 (J2)	SW2/2	SW2/3
COM1	Disabled	On	Off
COM2	COM2	Off	Off
COM3	COM3	Off	On
COM4	COM4	On	On

SERIAL PORT INTERRUPT SELECT		
Port 1 (J4)	SW1/3	SW1/4
IRQ4	Off	On
IRQ3	On	Off

Continued on next page . . .

**DIAMOND FLOWER, INC.**  
**DIO-200X**

... continued from previous page

SERIAL PORT INTERRUPT SELECT		
Port 2 (J2)	SW1/3	SW1/4
í IRQ3	On	Off
IRQ4	Off	On

PARALLEL PORT CONFIGURATION	
LPT	SW2/1
í 1	Off
2	On

PARALLEL PORT INTERRUPT SELECT		
IRQ	SW1/5	SW1/6
í IRQ7	On	Off
IRQ5	Off	On

NORMAL/FORCED TRUE CONFIGURATION							
Port 1	Port 2	JP3/A	JP3/B	JP3/C	JP2/A	JP2/B	JP2/C
Normal	Normal	Pins 1 & 2					
Forced true	Forced true	Pins 2 & 3					

Note: Pins designated should be in the closed position.

SERIAL PORT'S DTE/DCE CONFIGURATION			
Primary serial port Jumper JP4		Secondary serial port Jumper JP1	
1  TX	1  TX	1  TX	1  TX
 RD	 RD	 RD	 RD
 RTS	 RTS	 RTS	 RTS
 CTS	 CTS	 CTS	 CTS
9  DTR	9  DTR	9  DTR	9  DTR
DTE	DCE	DTE	DCE

CLOCK/CALENDER CONFIGURATION	
Port	SW2/4
í Enabled	On
Disabled	Off

CLOCK/CALENDER INTERRUPT SELECTION		
IRQ	SW1/7	SW1/8
í IRQ2	Off	On
IRQ5	On	Off