


DIGITAL COMMUNICATION ASSOCIATES, INC. SYNCHRONOUS COMMUNICATIONS ADAPTER

Card Type Serial controller
Chipset/Controller Zilog 8085
I/O Options Serial port
Maximum DRAM N/A

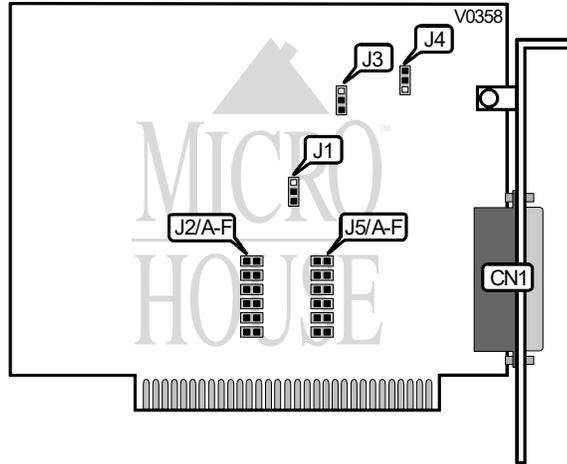

CONNECTIONS	
Purpose	Location
Serial port	CN1

I/O ADDRESS CONFIGURATION						
Address	J2A	J2B	J2C	J2D	J2E	J2F
380h	Open	Open	Open	Open	Closed	Open
300h	Closed	Open	Open	Open	Open	Open
308h	Open	Closed	Open	Open	Open	Open
340h	Open	Open	Closed	Open	Open	Open
348h	Open	Open	Open	Closed	Open	Open
388h	Open	Open	Open	Open	Open	Closed

SLOT NUMBER & PC/XT SETTINGS	
Setting	J1
Card in slot other than slot 8 on PC/XT	Pins 2 & 3 closed
Card in slot 8 of PC/XT	Pins 1 & 2 closed

Continued on next page . . .

DIGITAL COMMUNICATION ASSOCIATES, INC.
DCA SYNCHRONOUS COMMUNICATIONS ADAPTER

... continued from previous page

INTERRUPT SELECT						
IRQ	J5A	J5B	J5C	J5D	J5E	J5F
IRQ3	Open	Closed	Open	Open	Open	Open
IRQ2	Closed	Open	Open	Open	Open	Open
IRQ4	Open	Open	Closed	Open	Open	Open
IRQ5	Open	Open	Open	Closed	Open	Open
IRQ6	Open	Open	Open	Open	Closed	Open
IRQ7	Open	Open	Open	Open	Open	Closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J3	Pins 1 & 2 closed
J4	Pins 1 & 2 closed