


# CONTROL CORPORATION ROCKETPORT 32

**Card Type** Serial controller  
**Chipset/Controller** Control  
**I/O Options** Serial ports (2)  
**Maximum DRAM** N/A

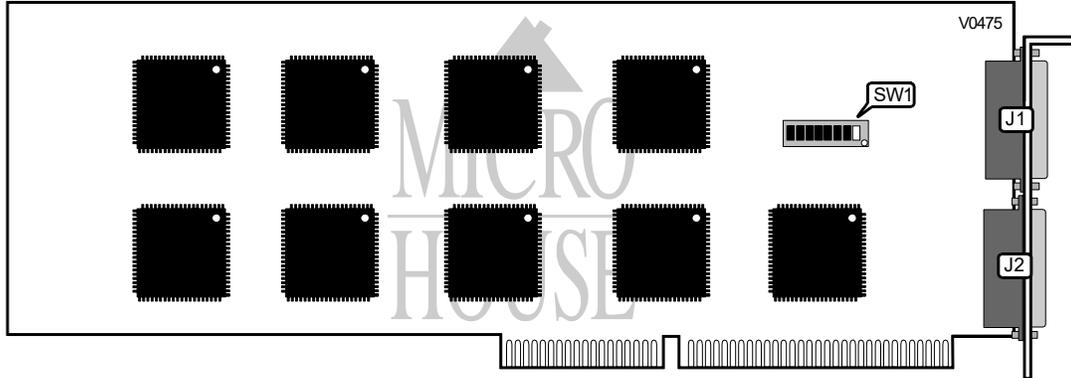

CONNECTIONS			
Port	Location	Port	Location
Serial port 1	J1	Serial port 2	J2

CARD 1 ADDRESS SELECT								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100 - 143h	Off	On	Off	On	On	On	On	On
140 - 183h	On	Off	Off	On	On	On	On	On
180 - 1C3h	Off	Off	Off	On	On	On	On	On
200 - 243h	Off	On	On	Off	On	On	On	On
280 - 2C3h	Off	Off	On	Off	On	On	On	On
300 - 343H	Off	On	Off	Off	On	On	On	On

CARD 2 ADDRESS SELECT								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100 - 143h	Off	On	Off	On	Off	On	On	On
140 - 183h	On	Off	Off	On	Off	On	On	On
180 - 1C3h	Off	Off	Off	On	Off	On	On	On
200 - 243h	Off	On	On	Off	Off	On	On	On
280 - 2C3h	Off	Off	On	Off	Off	On	On	On
300 - 343H	Off	On	Off	Off	Off	On	On	On

Continued on next page . . .

**CONTROL CORPORATION**  
**ROCKETPORT 32**

... continued from previous page

CARD 3 ADDRESS SELECT								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100 - 143h	Off	On	Off	On	On	Off	On	On
140 - 183h	On	Off	Off	On	On	Off	On	On
180 - 1C3h	Off	Off	Off	On	On	Off	On	On
200 - 243h	Off	On	On	Off	On	Off	On	On
280 - 2C3h	Off	Off	On	Off	On	Off	On	On
300 - 343H	Off	On	Off	Off	On	Off	On	On

CARD 4 ADDRESS SELECT								
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6	SW1/7	SW1/8
100 - 143h	Off	On	Off	On	Off	Off	On	On
140 - 183h	On	Off	Off	On	Off	Off	On	On
180 - 1C3h	Off	Off	Off	On	Off	Off	On	On
200 - 243h	Off	On	On	Off	Off	Off	On	On
280 - 2C3h	Off	Off	On	Off	Off	Off	On	On
300 - 343H	Off	On	Off	Off	Off	Off	On	On