


ZOLTRIX, INC. AUDIO PLUS 1600

Card Type	Sound card
Chipset Controller	Unidentified
I/O Options	CD-ROM audio in, CD-ROM interface (3), Game/MIDI port, line in, microphone, speaker, volume
Maximum DRAM	N/A

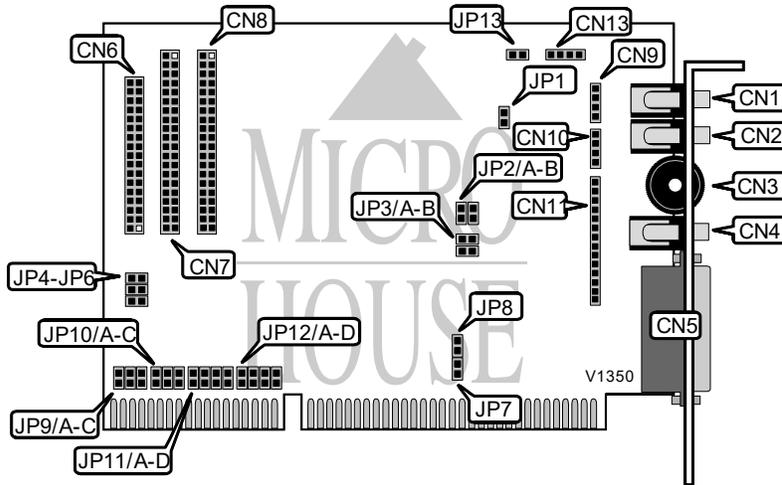

CONNECTIONS			
Purpose :	Location	Purpose :	Location
Line in	CN1	Sony CD-ROM interface	CN6
Mic in	CN2	Mitsumi CD-ROM interface	CN7
Volume	CN3	Panasonic CD-ROM interface	CN8
Speaker jack	CN4	CD audio-in	CN13
Game/MIDI port	CN5		

I/O ADDRESS SELECTION			
Address	JP2/A	JP2/B	
220h	Closed	Open	
240h	Open	Closed	
260h	Open	Open	
Disabled	Closed	Closed	

Continued on next page...

ZOLTRIX, INC.
AUDIO PLUS 1600

... continued from previous page

MIDI PORT BASE ADDRESS SELECTION		
Address	JP3/A	JP3/B
í 330h	Open	Open
300h	Closed	Closed
310h	Closed	Open
320h	Open	Closed

CD-ROM I/O ADDRESS SELECTION			
Address	JP4	JP5	JP6
í 300-303h	Closed	Closed	Closed
310-313h	Closed	Closed	Open
320-323h	Closed	Open	Closed
330-333h	Closed	Open	Open
340-343h	Open	Closed	Closed
350-353h	Open	Closed	Open
360-363h	Open	Open	Closed
370-373h	Open	Open	Open

MIDI UART CONFIGURATION	
Setting	JP7
í Enabled	Open
Disabled	Closed

GAME PORT CONFIGURATION	
Setting	JP8
í Enabled	Open
Disabled	Closed

DMA CONFIGURATION						
Channel	JP9/A	JP9/B	JP9/C	JP10/A	JP10/B	JP10/C
í 1	Open	Closed	Open	Open	Closed	Open
0	Closed	Open	Open	Closed	Open	Open
3	Open	Open	Closed	Open	Open	Closed

I/O INTERRUPT SELECTION				
IRQ	JP11/A	JP11/B	JP11/C	JP11/D
í IRQ7	Open	Open	Closed	Open
IRQ2	Closed	Open	Open	Open
IRQ5	Open	Closed	Open	Open
IRQ10	Open	Open	Open	Closed

Continued on next page...

ZOLTRIX, INC.
 AUDIO PLUS 1600

... continued from previous page

MIDI INTERRUPT SELECTION				
IRQ	JP12/A	JP12/B	JP12/C	JP12/D
í IRQ5	Open	Closed	Open	Open
IRQ7	Open	Open	Closed	Open
IRQ2	Closed	Open	Open	Open
IRQ10	Open	Open	Open	Closed

MONITOR MICROPHONE INPUT SELECTION	
Setting	JP1
í Enabled	Open
Disabled	Closed

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
CN9	N/A
CN10	N/A
CN11	N/A
JP13	N/A