


MAXTECH CORPORATION 9600BPS TURBOMODEM INTERNAL

Card Type	Modem (asynchronous)
Chip Set	Unidentified
Maximum Data Rate	9600bps
Data Bus	8-bit ISA
Data Modulation Protocol	Bell 103/212A
	ITU-T V.21, V.22, V.22bis, V.32
Error Correction/Compression	MNP5, V.42, V.42bis

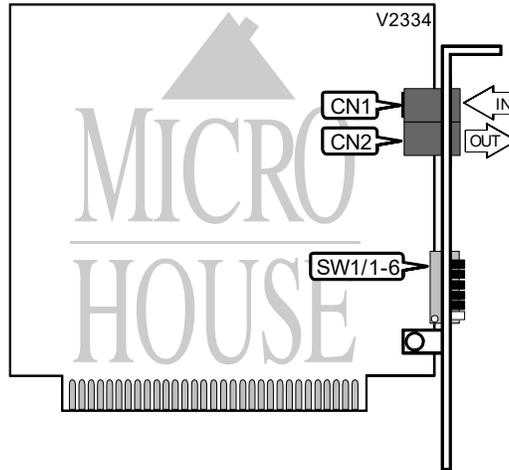

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Line out	CN2

SERIAL PORT ADDRESS		
Setting	SW1/1	SW1/2
i COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT				
Setting	SW1/3	SW1/4	SW1/5	SW1/6
2	On	Off	Off	Off
3	Off	On	Off	Off
i 4	Off	Off	On	Off
5	Off	Off	Off	On

Continued on next page . . .

MAXTECH CORPORATION 9600BPS TURBOMODEM INTERNAL

. . . continued from previous page

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', 'Comma', A/	
A, B, D, E, H, L, M, O, Q, S, V, X, Y, Z	
&C, &D, &G, &L, &M, &P, &R, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \E, \G, \J, \K, \O, \Q, \U, \V, \X, \Y, \Z, %A, %C	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23	
S25, S26, S27	
Note: See MHI Help file for full command documentation.	

Proprietary AT Command Set

See: MAXTECH CORPORATION, 14400BPS TURBOMODEM INTERNAL document for a full command summary.